



# NSP

## Network Services Platform

Release 24.4

### Data Collection and Analysis Guide

---

3HE-20004-AAAA-TQZZA  
Issue 1  
April 2024

© 2024 Nokia.

Use subject to Terms available at: [www.nokia.com/terms](http://www.nokia.com/terms)

---

**Legal notice**

Nokia is committed to diversity and inclusion. We are continuously reviewing our customer documentation and consulting with standards bodies to ensure that terminology is inclusive and aligned with the industry. Our future customer documentation will be updated accordingly.

---

This document includes Nokia proprietary and confidential information, which may not be distributed or disclosed to any third parties without the prior written consent of Nokia.

This document is intended for use by Nokia's customers ("You"/"Your") in connection with a product purchased or licensed from any company within Nokia Group of Companies. Use this document as agreed. You agree to notify Nokia of any errors you may find in this document; however, should you elect to use this document for any purpose(s) for which it is not intended, You understand and warrant that any determinations You may make or actions You may take will be based upon Your independent judgment and analysis of the content of this document.

Nokia reserves the right to make changes to this document without notice. At all times, the controlling version is the one available on Nokia's site.

No part of this document may be modified.

NO WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF AVAILABILITY, ACCURACY, RELIABILITY, TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS MADE IN RELATION TO THE CONTENT OF THIS DOCUMENT. IN NO EVENT WILL NOKIA BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO SPECIAL, DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL OR ANY LOSSES, SUCH AS BUT NOT LIMITED TO LOSS OF PROFIT, REVENUE, BUSINESS INTERRUPTION, BUSINESS OPPORTUNITY OR DATA THAT MAY ARISE FROM THE USE OF THIS DOCUMENT OR THE INFORMATION IN IT, EVEN IN THE CASE OF ERRORS IN OR OMISSIONS FROM THIS DOCUMENT OR ITS CONTENT.

Copyright and trademark: Nokia is a registered trademark of Nokia Corporation. Other product names mentioned in this document may be trademarks of their respective owners.

© 2024 Nokia.

# Contents

- About this document**.....7
- Part I: Data collection, analysis, and visualization**.....9
  - 1 Overview** .....11
    - 1.1 How does NSP support telemetry management? .....11
    - 1.2 What should I know about telemetry data collection? .....12
    - 1.3 What information can I find in the Telemetry Statistic Search Tool?.....14
    - 1.4 What charts can I create in NSP? .....15
  - 2 Telemetry** .....17
    - Telemetry collection**.....17
      - 2.1 How do I install telemetry artifacts? .....17
      - 2.2 What is a subscription? .....18
      - 2.3 How do subscriptions work? .....19
      - 2.4 What is an object filter? .....19
      - 2.5 How do object filters work? .....20
      - 2.6 What is a telemetry chart? .....23
      - 2.7 How does telemetry charting work? .....23
      - 2.8 How do I manage subscriptions? .....24
      - 2.9 How do I plot a telemetry chart? .....25
    - Aggregation** .....28
      - 2.10 What is aggregation? .....28
      - 2.11 How do I set the aggregation time zone? .....28
      - 2.12 How do I edit aggregation information? .....29
    - Age-out policy** .....30
      - 2.13 What is an age-out policy? .....30
      - 2.14 How do I edit an age-out policy? .....30
- 3 Baseline Analytics**.....31
  - 3.1 What is a baseline? .....31
  - 3.2 What is an anomaly? .....31
  - 3.3 How do baselines and anomalies work? .....31
  - 3.4 What should I know about baseline and anomaly detector creation? .....35
  - 3.5 How do I create baselines? .....36
  - 3.6 How do I edit or delete baselines? .....38
  - 3.7 What is a baseline chart? .....39

---

3.8	How do I plot a baseline chart? .....	40
3.9	How do I chart an anomaly? .....	41
<b>4</b>	<b>NSP Indicators</b> .....	<b>43</b>
	<b>Indicators</b> .....	<b>43</b>
4.1	What is an indicator? .....	43
4.2	How do indicators work? .....	43
4.3	How do indicator formulas work? .....	46
4.4	What should I know about indicator creation and management? .....	47
4.5	What is an indicator chart? .....	49
4.6	What is a threshold crossing event? .....	49
4.7	How do I create an indicator? .....	49
4.8	How do I edit or delete an indicator? .....	51
4.9	How do I plot an indicator chart? .....	52
4.10	How do I chart a threshold crossing event? .....	54
	<b>Indicator templates</b> .....	<b>55</b>
4.11	What is an indicator template? .....	55
4.12	How do I create an indicator template? .....	55
4.13	How do I edit an indicator template? .....	57
4.14	How do I delete an indicator template? .....	57
<b>5</b>	<b>OAM tests</b> .....	<b>59</b>
	<b>Tests</b> .....	<b>59</b>
5.1	What can I test in NSP? .....	59
5.2	What is CFM? .....	59
5.3	How do OAM tests work? .....	60
5.4	How do I create an OAM test? .....	62
5.5	How do I execute an OAM test? .....	64
5.6	How do I edit an OAM test? .....	64
5.7	How do I edit or delete an OAM test? .....	65
5.8	How do I view OAM test results? .....	66
5.9	How can I troubleshoot Twamp-light test issues? .....	67
	<b>Test Suites</b> .....	<b>69</b>
5.10	What is an OAM test suite? .....	69
5.11	How do I create an OAM test suite? .....	69
5.12	How do I stop or start an OAM test suite? .....	70
5.13	How do I edit or delete an OAM test suite? .....	71
5.14	How do I view OAM test suite results? .....	71

---

<b>Test Templates</b> .....	<b>73</b>
5.15 What is an OAM test template? .....	73
5.16 How do test templates work? .....	73
5.17 What is a system template? .....	73
5.18 How do I create an OAM test template? .....	74
5.19 How do I edit an OAM test template? .....	75
5.20 How do I delete an OAM test template? .....	75
<b>Config Objects</b> .....	<b>76</b>
5.21 What is a config object? .....	76
5.22 What config objects are available in NSP? .....	76
5.23 How do I create a config object? .....	77
5.24 What can I do with config objects in NSP? .....	77
<b>Part II: Use cases</b> .....	<b>79</b>
<b>6 Telemetry management use cases</b> .....	<b>81</b>
6.1 Installing and locating specific telemetry types .....	81
6.2 Setting up statistics and aggregation for Port Throughput on the 7750 SR .....	84
6.3 Setting up baselines .....	87
6.4 Creating a simple indicator.....	92
6.5 Creating a complex indicator using a template .....	98
<b>7 Chart use cases</b> .....	<b>107</b>
7.1 Creating baseline and anomaly charts.....	107
7.2 Creating an indicator chart .....	111



---

# About this document

## Purpose

The *NSP Data Collection and Analysis Guide* introduces NSP Data Collection and Analysis functions to operators and administrators by describing usage and features.

## Scope

Some feature sets described in the document require the purchase and configuration of additional feature packages.

See the *NSP System Architecture Guide* for more information about feature packages and installation options.

## Safety information

For your safety, this document contains safety statements. Safety statements are given at points where risks of damage to personnel, equipment, and operation may exist. Failure to follow the directions in a safety statement may result in serious consequences.

## Document support

Customer documentation and product support URLs:

- [Documentation Center](#)
- [Technical support](#)

## How to comment

Please send your feedback to [documentation.feedback@nokia.com](mailto:documentation.feedback@nokia.com).





---

# Part I: Data collection, analysis, and visualization

## Overview

### Purpose

Describes telemetry, baseline, and indicator management in NSP.

### Contents

<b>Chapter 1, Overview</b>	11
<b>Chapter 2, Telemetry</b>	17
<b>Chapter 3, Baseline Analytics</b>	31
<b>Chapter 4, NSP Indicators</b>	43
<b>Chapter 5, OAM tests</b>	59



---

# 1 Overview

## 1.1 How does NSP support telemetry management?

### 1.1.1 Definition

NSP Data Collection and Analysis (DCA) functions provide collection, processing, and analysis for MDM and Cloud Native (CN) telemetry. NSP supports configuring telemetry subscriptions and using baseline analytics, NSP indicators, and OAM tests for anomaly detection, metric customization, and network tests.

The type and scope of statistics support is dependent on the NE source. NSP provides the following statistics support by NE type:

- **MDM-based telemetry**—SNMP protocol for multi-vendor NEs
- **Cloud Native telemetry**—gNMI protocol for Nokia and multi-vendor NEs
- **Classically managed NEs**—SNMP protocol for Nokia classically managed NEs, not described in this document, see the *NSP NFM-P Statistics Management Guide*.

### 1.1.2 Functionality

NSP provides the following DCA functions using collected telemetry data:

- visualization, in the form of telemetry charts
- aggregation, rules to combine stats for consumption by Analytics
- baseline analytics and anomaly detection, defining trends using telemetry data and identifying outliers
- NSP indicators, customized metrics to define and track KPIs
- OAM tests, template-based tests

The DCA telemetry functions described in this document are distinct from:

- Cflowd AA stats and other flow statistics collected via Flow Collectors
- Analytics report catalogs, though stats collected using DCA aggregation functions are available in Analytics. See the *NSP Analytics Report Catalog* for information about report generation and visualizations, and reference lists of the available report catalogs. Baseline analytics and analytics reporting are different functions, each with their own installation options.

NSP telemetry aggregation is configured using DCA functions, though only when an auxiliary database is installed.

#### Telemetry artifacts

The telemetry types for NEs are defined using YANG files in the NE artifact bundles. NSP uses custom resource (CR) definitions to translate the YANG data, map incoming telemetry to managed objects in the network, and output data to Postgres, Vertica, and Kafka as required. These resource

---

definition files can be viewed as part of the artifact archive. For information about the CRs that accompany your NE adaptors, see the relevant artifact guide.

See [2.1 “How do I install telemetry artifacts?” \(p. 17\)](#) for more information.

**i** **Note:** You must install the relevant adaptors before managing the associated NE types to use the telemetry definitions. NSP also includes a limited, generic set of default telemetry. Without installing adaptors, you will only see the default telemetry.

### Telemetry subscriptions

A subscription defines the parameters of telemetry collection and uses a filter definition to select the NEs/objects. NSP deploys the specified data to the NE and registers the Kafka subscription, which is used to transfer telemetry data from the NE to NSP.

See [2.2 “What is a subscription?” \(p. 18\)](#) for more information.

## 1.2 What should I know about telemetry data collection?

### 1.2.1 Data collection prerequisites

All DCA functions, including baselines, indicators, and OAM testing, depend on telemetry data. Telemetry data collection must be configured before any function in the Data Collection and Analysis views can be used.

NSP has the following prerequisites for telemetry data collection.

- The NEs from which you want to collect data must be discovered, managed, and reachable by the NSP.
- Mediation policies must be configured in the discovery rules used to discover and manage the NEs:
  - SNMP telemetry requires an SNMP mediation policy
  - gNMI telemetry requires a GRPC mediation policySee “Device discovery” in the *NSP Device Management Guide* for more information about NE discovery and mediation.
- If you want to use a telemetry subscription to manage MIB statistics from classic NEs, statistics collection must be configured in the NFM-P.
- Cloud native telemetry requires the gnmiTelemetry installation option.
- All required NE adaptors and telemetry custom resources must be installed on the NSP server:
  - for the list of required telemetry artifacts for an NE family, see the artifact guide for the NE family
  - for information on installing the telemetry CRs, see [2.1 “How do I install telemetry artifacts?” \(p. 17\)](#).
- If you want to use statistics for Analytics reports with granularity other than raw data, you need aggregation rules for the telemetry types you want to collect; see the Telemetry tutorial on the [Network Developer Portal](#)
- You need to [configure the aggregation time zone](#).
- To collect accounting statistics, an FTP mediation policy must be assigned to the NE. FTP

mediation policies are created and assigned using a REST API; see the LSOM Framework and APIs tutorial on the [Network Developer Portal](#).

### 1.2.2 Data available for collection

When NSP collects telemetry from NE devices using the gNMI protocol, only data in statistics containers is available for collection. Furthermore, NSP may only make a subset of the attributes in the statistic containers available in its telemetry types. If you cannot find the counter you are looking for in the NSP telemetry types, verify that it is available in a statistics container in the relevant NE state Yang path.

For example, the SR Linux search tool can be found here: (<https://yang.srlinux.dev/>). Click on the NE release of interest and filter for the paths you need, as shown in the following example:

**Path Browser**

ethernet

All  State  Config

Show prefix  Filters

**Platform**

- 7220-IXR-DST
- 7220-IXR-H2
- 7220-IXR-H3
- 7220-IXR-H4
- 7250-IXR-10
- 7250-IXR-10E
- 7250-IXR-6
- 7250-IXR-6E

**Features**

- gnsi-certz
- gRPC-server
- ingress-subif-policing
- interface-evpn-internal-tags
- interface-references
- internal-tags
- ip-acl-dscp-set
- ip-qos-multifield

Note: Platform selection overrides already selected Features (if any)

1 - 40 of 408

State	Path	Type
true	/interface[name=*/ <b>ethernet</b> /statistics/in-1024b-to-1518b-frames	zero-based-counter64
true	/interface[name=*/ <b>ethernet</b> /statistics/in-128b-to-255b-frames	zero-based-counter64
true	/interface[name=*/ <b>ethernet</b> /statistics/in-1519b-or-longer-frames	zero-based-counter64
true	/interface[name=*/ <b>ethernet</b> /statistics/in-256b-to-511b-frames	zero-based-counter64

---

For more information about supported telemetry attributes for your NE family, see the NE artifact guide. For more information about telemetry definitions, see the Telemetry collection API documentation on the [Network Developer Portal](#).

### 1.2.3 Automatic subscriptions

Subscriptions are automatically created for Baseline Analytics, NSP Indicators, and OAM testing. To collect statistics for another purpose, [create a subscription](#) and set its state to enabled.

RESTCONF APIs are available for telemetry collection and aggregation; see the Network Assurance API documentation on the [Network Developer Portal](#).

### 1.2.4 Data storage

You can enable database storage for MDM managed NEs as part of subscription creation. By default, the data collected is stored in Postgres unless there is an auxiliary database enabled, in which case all collected data is stored in the auxiliary database. For NFM-P collected SNMP or accounting statistics, the database parameter in the subscription is ignored.

Historical data, that is, data that is stored in a database, is retained according to the age-out policy; see [2.14 "How do I edit an age-out policy?"](#) (p. 30).

**i** **Note:** For statistics to be available to the Analytics application for aggregated reports, they must be stored in the auxiliary database.

The Telemetry data API also provides the functionality to subscribe, stream, and plot historical and real-time data; see Use Case 5 in the Telemetry Collection tutorial on the [Network Developer Portal](#).

## 1.3 What information can I find in the Telemetry Statistic Search Tool?

### 1.3.1 Telemetry Statistic Search Tool

The Telemetry Statistic Search Tool is found in the on-product NSP Help Center. From the Help Center home screen, navigate to **REFERENCE, Statistic Search, Telemetry Statistic Search**.

The tool lists telemetry types available for statistics collection and is dynamically updated. Telemetry types are added to the tool when the required feature packages, adaptor files, and mapping files for cut-through telemetry are installed on the NSP.

Installation of the following files may be required for a telemetry type to appear in the tool, depending on the telemetry type:

- vendor agnostic (va) CR bundles
- telemetry yang files
- cut-through (ct) CR bundles

For information about installing telemetry files; see [2.1 "How do I install telemetry artifacts?"](#) (p. 17).

---

## 1.4 What charts can I create in NSP?

### 1.4.1 Data Collection and Analysis Visualizations

NSP charts allow you to see telemetry data collection in real time.

The following views are available, depending on the feature packages installed. You can navigate from one view to another by choosing from the drop-down list at the top left.

The chart views display saved charts. You can plot a saved chart or create a new one.

The views display information in columns. Drag a column header to reorder the columns, drag a column header separator to resize columns, or click on a column header to sort the data in the column. An icon appears when the column is sorted.

#### **Data Collection and Analysis Visualizations, Telemetry**


- Telemetry Charts


#### **Data Collection and Analysis Visualizations, Baseline Analytics**

- Baseline Charts
- Anomalies

#### **Data Collection and Analysis Visualizations, NSP Indicators**

- Indicator Charts
- Threshold Crossing Events

You can click  (Table settings & actions) in the column header on any view to manage the display or export data.

Filter the list using the column header filters. To remove a filter, delete information from the filter field or choose **Clear filters** from the  (Table settings & actions) menu in the column header.

For information about charts created from Analytics reports, see the *NSP Analytics Report Catalog*.





---

## 2 Telemetry

### Telemetry collection

#### 2.1 How do I install telemetry artifacts?

##### 2.1.1 Purpose

Use this procedure to install the custom resource (CR) and yang files required for telemetry collection.

Telemetry artifacts include vendor agnostic (va) CR bundles, telemetry yang files, and cut-through (ct) CR bundles. There is no dependency between the two types of CRs, and no requirement to install both. If the telemetry counters you need to collect are vendor agnostic, you can install only the va bundle.

Cut-through custom resources may have dependency on cut-through telemetry yang files. Before you install a cut-through CR bundle, verify the files in the telemetry yang collection to see if the counters you need are present in any yang file. If you are installing cut-through telemetry yang files and a cut-through CR bundle, the yang files must be installed first.

Nokia recommends that you only install the cut-through telemetry yang files required for your use cases.

 **Note:** Cut-through telemetry types are for gNMI-capable devices only.

##### 2.1.2 Steps

1

Obtain any required vendor agnostic (va) CR bundles from the [Nokia NSP software download site](#):

1. Choose the release, Adaptors, and the adaptor type.
2. The list of available downloads is displayed. Choose the zip file with va and cr in the filename, for example, `nsp-telemetry-cr-va-sros-1.0.0-rel.10.zip`

2

Install the artifact bundle from the **Artifacts, Artifact Bundles** view; see “How do I install an artifact bundle?” in the *NSP Network Automation Guide*.

The telemetry types in the va bundle are now available in the Telemetry Statistic Search Tool.

3

Use the Telemetry Statistic Search Tool to see if you have the telemetry types you need:

1. Open the NSP Help Center. From the Help Center home screen, navigate to **REFERENCE, Statistic Search, Telemetry Statistic Search**.
2. Enter search terms in the Counter Name field to filter on the counters you need.

---

Enter additional filters as needed to narrow the search.

3. Click on each row to see the Info panel. Verify whether the selected statistic is the one you need.
4. If the telemetry types you need are found, this procedure is complete.
5. If the telemetry type is not found, proceed to the next step.

4

---

Perform the sequence in [Step 1](#) to obtain any required telemetry yang files.

5

---

Extract the files from the zip and look for the telemetry types:

1. View the list of telemetry files. The filenames provide information about the telemetry types included in the file.
2. Open the file and search for terms relevant to the counters you need. A counter, where present, will be found in a leaf element. A list of telemetry types is provided in the leaf.
3. If you find a telemetry type you need, install the yang file using **yang-file.bash**; see “How do I manage MDM model definitions?” in the *NSP System Administrator Guide*.

6

---

Obtain any required SR OS cut-through (ct) CR bundles from the Nokia [Support Portal](#) and install them from the **Artifacts, Artifact Bundles** view; see “How do I install an artifact bundle?” in the *NSP Network Automation Guide*.



**Note:** Cut-through telemetry types are for gNMI capable devices only.

7

---

Open the Telemetry Statistic Search Tool and search for your desired telemetry types.

If you do not find the definition or mapping you require, or you need to augment an existing telemetry type, contact your Nokia service representative.

END OF STEPS

---

## 2.2 What is a subscription?

### 2.2.1 Subscription

A subscription represents a request for statistics information management.

### 2.2.2 User-configured subscriptions

You can configure telemetry subscriptions.

For an NE managed by NFM-P, the statistics you need must be collected by the NFM-P.

## 2.2.3 NSP-generated subscriptions

Baseline and indicator subscriptions are managed by Baseline Analytics and NSP Indicators respectively, and are read-only in the **Data Collection and Analysis, Subscriptions** view.

Baseline Analytics is available with the Network Operation Analytics feature package, and NSP Indicators is available with the Performance Indicators and Alerts installation option.

**i** **Note:** To use Baseline Analytics and NSP Indicators with model-driven NEs, the gnmiTelemetry installation option is also required.

NSP generates predefined OAM-related telemetry subscriptions in systems where MD-OAM is deployed. OAM subscriptions appear in the Telemetry subscriptions list, prefixed with **TestSuiteEx\_OAM**. Do not edit predefined OAM subscriptions.

## 2.3 How do subscriptions work?

### 2.3.1 Statistics collection requirements

When you configure a telemetry subscription, you specify a set of statistics data and notification and storage options for the data. To configure the data set, you select the type of statistics you are interested in, the frequency of collection, and configure filtering by NE and counters as needed.

Statistics collection requirements and behavior depend on the NE management type, as described in the following table.

Telemetry type	Statistics configuration
MIB statistics for classic NEs	Statistics collection and database storage must be configured in NFM-P before creating a subscription in NSP. The subscription tells NFM-P to publish any statistics that match subscription requirements to Kafka as they are collected. <sup>1</sup> The interval specified in the subscription request is ignored.
CN telemetry using gRPC	When the subscription is created, the NSP initiates collection of the telemetry data from the NE at the specified interval.
MDM telemetry for statistics not supported by CN telemetry, on model driven NEs	When the subscription is created, the NSP initiates collection of the telemetry data from the NE at the specified interval.

#### Notes:

1. If statistics collection is set up in both NFM-P and NSP, the telemetry framework may receive the same information twice. The duplication could result in incorrect reports or duplicated indicator TCAs. Verify that data being used for telemetry, baseline, or indicator subscriptions is only collected once. Disable equivalent MIB based statistics in NFM-P if gRPC telemetry is used.

## 2.4 What is an object filter?

### 2.4.1 Object filters

Object filters use XML Path (XPath) expressions against the NSP object YANG model to determine which objects a subscription applies to.

---

The object filter is combined with the telemetry type to create the list of relevant statistics data.

## 2.5 How do object filters work?

### 2.5.1 Object filter components

An object filter is an XPath expression representing one or more network objects. The object filter indicates the objects to collect telemetry data from, such as an NE or a list of ports.

An XPath is composed of a series of XPath elements. Each element represents a step on the YANG model tree from left (root) to right (leaf or container). An element contains a name and a series of optional predicates.

**Example:** `network-element[ne-id='10.1.0.0']`


### 2.5.2 Predicates

A predicate is an expression within square brackets that identifies the instance of each XPath element. Keys and attributes of the object (as defined in the NSP model YANG) may be included.

Predicates can contain the following operators:

- =
- >
- <
- >=
- <=
- !=
- and
- or

Subexpressions can be enclosed in parentheses to enforce order of operations.

 **Note:** Comparison operators use string comparators, so “value2” is greater than “value1”.

**Examples:**

```
[ne-id='10.1.0.0' or ne-id='10.1.1.1']
```

```
[(type='7750 SR-12' and product='7750 SR') and (version='TiMOS-B 19.0.R1'  
or contains('version','15.0'))]
```

### 2.5.3 Predicate functions

The following functions are supported within a predicate:

- `contains('attribute', 'search-text')`  
searches for all objects where the named attribute contains the search text
- `containsIgnoreCase('attribute-name', 'search-text')`

---

same as `contains()` but conducts a case-insensitive search

- `not(<binary-expression>|<function-expression>)`  
negates the result of the argument expression

- `boolean ()`

A boolean function may be used to find objects by searching through an object's children and references.

The boolean function returns true if at least one of the specified object references or children satisfies the condition.

If a boolean function includes an instance-identifier object, the following requirements apply:

- the instance-identifier must be the only object in the predicate.
- the operator in the predicate must be `=`
- if there are multiple predicates, the format must be `[predicate] [predicate]`

#### Examples:

- `[contains('component-id', 'port=1')]`
- `[not(contains('component-id', 'port=1'))]`
- `[contains('component-id', 'port=1') and not(contains('component-id', 'breakout'))]`
- To find endpoints on a specified service:  
`/nsp-service:services/service-layer/eline[service-id='service_epipe_12']/endpoint[boolean(service[nsp-model:schema-nodeid='/nsp-service:services/service-layer/eline'][name='service_epipe_12'])]`
- To find all ports with id 1/1/1/1 where mtu-value in the port-details has value 888:  
`/nsp-equipment:network/network-element/equipment/port[contains(component-id, 'shelf=1/slot=1/card=1/port=1') and boolean(port-details[mtu-value = 888])]`  
In this example, the boolean function returns `true` only if an `mtu-value` of 888 is found in the port details.
- To find the NEs associated with a specified controller:  
`/nsp-ne-control:ne-control/discovered-ne[boolean(controller[nsp-model:schema-nodeid='/nsp-ne-control:ne-control/controller'][ne-id='NSP-24'])]`

## 2.5.4 XPath expressions

An XPath expression is an XPath that can be evaluated to produce a list of XPath identifiers. For the purpose of an object filter, the XPath expression must resolve to a NodeSet of NSP model identifiers.

XPath expressions can be chained together using a union `"|"` operator, which evaluates each subexpression independently into NodeSets and performs a set union operation to combine the NodeSets into a single NodeSet result.

Expressions can be static expressions, which resolve to the same result every time, or wildcard expressions, which can produce different results. The dynamic effect is created by using syntax that does not specifically identify a set of NSP model objects: there is no wildcard character.

---

### Examples:

MDM equipment: `component-id='shelf=1/cardSlot=1/card=1/mdaSlot=1/mda=1/port=1/1/1'`

Classic equipment: `component-id='shelf=1/slot=1/card=1/slot=1/card=1/port=1'`

### Example of a static expression:

```
/nsp-equipment:network/network-element[ne-id='10.1.0.0']  
/hardware-component/port[component-id='shelf=1/cardSlot=1/card=1/mdaSlot=  
1/mda=1/port=1/1/1' or component-id='shelf=1/cardSlot=1/card=1/mdaSlot=  
1/mda=1/port=1/1/2'] | /nsp-equipment:network/network-element[ne-id='10.  
1.0.1']/hardware-component/port[component-id='shelf=1/cardSlot=1/card=  
1/mdaSlot=1/mda=1/port=1/1/3' or component-id='shelf=1/cardSlot=1/card=  
1/mdaSlot=1/mda=1/port=1/1/4']
```

### Examples of wildcard expressions:

Create a wildcard expression by not including all keys in the predicates.

- The following expression chooses all objects of type `port` on NE 1.1.1.1.

```
/nsp-equipment:network/network-element[ne-id='1.1.1.1']  
/hardware-component/port
```

- The following expression chooses all objects of type `port` for all NEs.

```
/nsp-equipment:network/network-element/hardware-component/port
```

- The following expression returns all child objects that can respond to the selected telemetry type and counters.

```
/nsp-equipment:network/network-element[ne-id='10.1.0.0']
```

## 2.5.5 Filtering models

Paths for MDM-managed NEs are based on the NE YANG models.

### Device model

The NE YANG model used by NSP is **network-device-mgr**.

- This model uses device model xpath notation—this means that the filter can support all the paths as implemented by the node. Creating a path using the device model is useful when the object is not supported by, or not defined in, the NSP model.

- The device model provides a view of the device-specific paths. For example, an SR OS NE defines an LSP object using a path similar to `/network-device-mgr`:

```
network-devices/network-device[name='10.1.0.0']/root/nokia-state:  
state/router[router-name='Base']/mpls/statistics/lsp-egress[lsp-name=  
'LSP1'].
```

The telemetry mapping artifact must contain a definition for the device path for telemetry to be collected.

The following is an example of a **network-device-mgr** model filter type for an NFM-P managed device. This filter targets a specific object instance by its FDN:

---

```
/network-device-mgr:network-devices/network-device[name='10.1.0.0']  
/root/nokia-nsp-source:fdn[id='fdn:realm:sam:lsp:from-11.50.150.30-id-2']
```

### Equipment model

The **nsp-equipment:network** model is a normalized NSP YANG model that provides a view of the equipment for all network elements, abstracting the device specifics. Using NSP equipment model identifiers is recommended because the models are supported by NSP applications. In addition, filters based on the NSP equipment model can use operators such as AND or CONTAINS.

For example, the following path represents an individual port.  
`/nsp-equipment:network/network-element[ne-id='10.1.0.0']/hardware-component/port[name='1/1/1']`

Equipment model information can be found using the Network Inventory API; see the Postman collection on the [API Documentation page](#).


To assemble a filter, find the relevant model details and add predicates and predicate functions as needed. For example, a `get port` operation provides the path to the port.

## 2.6 What is a telemetry chart?

### 2.6.1 Telemetry charts

A telemetry chart plots historical information if available, then streams real-time data on the same chart.

For example, you can configure a chart to plot data from the last 12 hours, followed by current data. This information can be useful in assessing changes.


 **Note:** Historical data must be available; that is, data must have been collected and retention policies must allow for the data to remain in the database.

## 2.7 How does telemetry charting work?

### 2.7.1 Telemetry charting

When you configure a telemetry chart in Data Collection and Analysis Visualizations, a new telemetry data subscription is created to request historical and/or real time telemetry, as required by the chart configuration.

If historical telemetry data is requested, the data is retrieved from the database. Historical data must already be available in the database.

 **Note:** The telemetry data subscription requests data from the database based on the requirements configured for the chart, not on the subscription that collected the data.

If real time telemetry data is requested, a new telemetry subscription is automatically created to request the data from the NEs. The telemetry chart plots data from the subscriptions created for plotting.

---

If you open Data Collection and Analysis Visualizations by cross-launching from a telemetry subscription in the **Data Collection and Analysis Management, Subscriptions** view, the New Chart form displays the parameters configured in the telemetry subscription you cross-launched from. When you click PLOT, Data Collection and Analysis Visualizations creates telemetry subscriptions as needed to collect the data, and plots the data from the subscriptions it creates.

The subscriptions created for plotting do not save to the database or create file output.

## 2.8 How do I manage subscriptions?



### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

### 2.8.1 Steps


1

---

Open **Data Collection and Analysis Management, Subscriptions**.

2

To create a subscription:

1. Click **+ SUBSCRIPTION**.
2. In the Create Subscription form that opens, configure the General parameters as needed.
  - Enable database (DB) subscriptions as needed to save subscription information to the auxiliary database. For subscription data to be available to Analytics, it must be in the auxiliary database.
  - The subscription is enabled by default: it will start running immediately.  
Choose **Disabled** in the **State** field if you want to enable your subscription later.
3. In the **Object Filter** field, enter filtering information as needed to filter the collected data.  
As you type, the field provides suggestions for available filters to match your input and identifies incorrect syntax.
4. Enter information in the Telemetry Type field. As you type, the field filters for available telemetry types to match your input.  
Choose the telemetry type you need from the list of matches.
5. When you enter a telemetry type, all counters are enabled by default.  
To customize the counters, enable the **Enable notifications and notification counters** check box.  
Click **Remove**  to remove a counter.  
Click **+ COUNTERS** to add a counter that was removed.



---


6. Click **CREATE**.

The subscription begins collection when it is enabled.

---

3

To edit a subscription:

1. Choose a subscription and click  (Table row actions), **Edit**.
2. In the form that opens, update the parameters as needed and click **UPDATE**.

---

4

To delete a subscription:

Choose a subscription and click  (Table row actions), **Delete**.

The subscription is removed immediately.



**Note:** Removing a subscription does not remove data from the database. The data collected by the subscription is retained according to the database retention policy.

---

END OF STEPS

## 2.9 How do I plot a telemetry chart?



### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

### 2.9.1 Before you begin

When you create a telemetry chart, you configure a telemetry filter. For historical data to be displayed, the data must be available in the database; see [2.8 "How do I manage subscriptions?" \(p. 24\)](#).

Charts are created by streaming to the plotter: historical data is queried and streamed to the plotter, then real time telemetry subscriptions are created and the data from these subscriptions is streamed to the plotter.

Data Collection and Analysis Visualizations times out if telemetry data is not received. The time-out limit is either double the collection interval or two minutes, whichever is greater.

---

## 2.9.2 Steps

### Create a chart

1

---

Open the New Chart window:

- From **Data Collection and Analysis Visualizations, Telemetry Charts**, click **+ CHART**.
- From **Data Collection and Analysis Management, Subscriptions**, choose a subscription and click **⋮** (Table row actions), **Open in Data Collection and Analysis Visualizations**.

2

---

In the window that opens, configure the parameters in the top panel:

1. Configure the **Collection Interval** parameter. If you are using NFM-P telemetry data, verify that the collection interval is long enough to allow time for Visualizations to receive the data before timing out.
2. From the **Time Range** drop-down list, choose the amount of historical data to display.
3. Click **Combine charts** to plot data from multiple data series on the same chart.

3

---

Click **+ DEFINITION**.

The telemetry and resource filter definition panels are displayed.

4

---

Enter information in the **Telemetry Type** field. As you type, the field filters for available telemetry types to match your input.

Choose the telemetry type from the list of matches.

5

---

Choose counters to display from the **Counters** drop-down list.

6

---

In the **Object Filter** field, enter filtering information to filter the collected data.

7

---

If you need to save the configuration as a chart:

1. Click **SAVE AS**.
2. In the window that opens, enter a name for the chart and add a description if needed.
3. Click **SAVE**.

The chart is added to the list.

---

8

Click **PLOT**.

END OF STEPS


---

### 2.9.3 Steps


#### Plot an existing chart

1

To plot an existing chart with no changes:

1. Open **Data Collection and Analysis Visualizations, Telemetry Charts**.
2. Choose a chart and click  (Table row actions), **Chart**.

2

To edit a chart and plot it, choose the chart and click  (Table row actions), **Edit**.

3


Edit the parameters as needed and click **PLOT**.

END OF STEPS

---

#### Result

Visualizations displays a chart view showing the streaming data. While data is streaming, you can configure the **Group by** parameter in the upper left of the chart view to change how the data is grouped or click **Configure** in the upper right to view or change the configuration of the chart.

Click  (Chart Details) to open the Chart Details panel on the right side of the chart view to show details about the resources.

---

## Aggregation

### 2.10 What is aggregation?

#### 2.10.1 Aggregation

Aggregation is the practice of combining measurements for analysis. In the NSP, telemetry data is aggregated based on time period of collection: hourly, daily, weekly, or monthly. When a report is run in Analytics, the granularity parameter in the report determines which aggregated data set is analyzed. For example, if you select hourly granularity, the report shows the hourly aggregated data. Some reports can use raw data, that is, data that is not aggregated, but this is not available for all reports.

#### 2.10.2 What is an aggregation rule?

An aggregation rule defines how the data for a specified telemetry type is aggregated and how long each aggregated data set is retained.

Aggregation rules for model-driven telemetry are configured on the NSP server. They can be [viewed and edited](#) in NSP.

For aggregation information to be available, the auxiliary database must be configured and running.

Use the NFM-P to configure aggregation rules for data collected by the NFM-P; see the *NSP Analytics Report Catalog*.

#### 2.10.3 What is the aggregation time zone?

The aggregation time zone is the time zone that is used to determine the start and end time of data to be aggregated:

- hourly aggregation: from xx:00 to xy:00
- daily aggregation: from midnight to midnight
- weekly aggregation: from midnight Monday to midnight Monday
- monthly: from midnight on the 1st of the month until midnight on the first of the following month

### 2.11 How do I set the aggregation time zone?

#### NOTICE

**Changing the aggregation time zone changes the start and end times of all future aggregations. The first aggregation following the change may miss data or count data twice due to the difference in time zones.**

#### 2.11.1 Steps


1

---

Open **Data Collection and Analysis Management, Aggregation**.

- 
- 2 

---

Click  (More Actions), **Time Zone Setting**
  - 3 

---

In the form that opens, enter a time zone in the **Aggregation Time Zone** field.  
As you type, the list of available time zones is refined to match your input.
  - 4 

---

Choose the time zone from the list.
  - 5 

---


Click **OK** in the confirmation dialog.
  - 6 

---

Click **SAVE**.
- END OF STEPS** 

---

## 2.12 How do I edit aggregation information?

 **Note:** For the Aggregation view to be available, the auxiliary database must be configured and running.


### 2.12.1 Steps

- 1 

---

Open **Data Collection and Analysis Management, Aggregation**.
  - 2 

---

Choose an aggregation rule and click  (Edit).
  - 3 

---

In the form that opens, edit the parameters as needed and click **UPDATE**.
- END OF STEPS** 

---

---

## Age-out policy

### 2.13 What is an age-out policy?


#### 2.13.1 Age-out policy

An age-out policy is a retention policy for stored data. Data older than the retention period is purged from the database.

NSP creates a policy for each telemetry type, a policy for baselines, and a policy for indicators.

### 2.14 How do I edit an age-out policy?

#### 2.14.1 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Age-Out Policy**.
  - 2 \_\_\_\_\_  
Open the Edit form:
    - a. To edit a telemetry policy, choose Telemetry from the drop-down list, choose a policy and click  (Edit).
    - b. To edit the baseline or indicator policy, choose the policy type from the drop-down list.
  - 3 \_\_\_\_\_  
Edit the retention period and click **UPDATE**.
- END OF STEPS** \_\_\_\_\_

---

## 3 Baseline Analytics


### 3.1 What is a baseline?

#### 3.1.1 Baselines and anomalies

Baselines and anomaly detection are included with NSP Baseline Analytics.

A baseline detects a historical trend and generates expected values based on the trend.

Baseline and anomaly charts and the list of anomalies are available in Data Collection and Analysis Visualizations.


To open Data Collection and Analysis Visualizations for a baseline, choose the baseline and click  (Table row actions), **Open in Data Collection and Analysis Visualizations**. The view opens to a New Chart form with the baseline selected.

RESTCONF APIs are available for Baseline Analytics; see the Network Infrastructure Management API documentation on the [Network Developer Portal](#).

### 3.2 What is an anomaly?

#### 3.2.1 Anomalies

An anomaly is a value that deviates enough from a baseline's expected value to be flagged for attention. You can configure anomaly thresholds as part of baseline creation.

 **Note:** A baseline must be trained for at least one season before expected values can be charted. Detection of anomalies requires one or more seasons depending on the detector. See [3.3 "How do baselines and anomalies work?"](#) (p. 31) for more information.


### 3.3 How do baselines and anomalies work?

#### 3.3.1 Components

A baseline provides the logic for the collection of baseline statistics, and for the detection of anomalies.

When you create baselines, you specify a resource or group of resources to collect a set of statistics over a defined time window. Information collected during that window is used to calculate a data point for the baseline. You also define a season, which is the length of time statistics need to be measured to assess trends. For example, to assess network traffic, you could set up a 15-minute window with a one-week season, which provides values calculated every 15 minutes over a one-week period.

Creation of a baseline creates a baseline subscription to collect the required data.

 **Note:** Baseline subscriptions and telemetry subscriptions are separate. A baseline cannot be generated from data collected by a telemetry subscription.

---

On-demand NFM-P statistics cannot be used to create baselines.

A baseline consists of the following components. The components appear in the Create and Edit forms.

- [General parameters](#)
- [Filter & Counters](#)
- [Anomaly Detectors](#)

Baselines are created on a per-resource basis. A resource is an entity that can collect the desired statistics. In the Create Baselines form, you configure the required parameters and choose the resources to collect the statistics.

If the NE is managed using MDM, configuration of a baseline initiates statistics collection. If the NE is managed by NFM-P, statistics collection must be configured on the NFM-P and the resource must already be collecting the desired statistics for a baseline to be created.

**i** **Note:** Baseline Analytics is different from the NSP Analytics application.

Baseline Analytics provides near-real-time baseline and anomaly detection from telemetry counters, for example, received octets for the `/telemetry:base/interfaces/interface` telemetry type.

The Analytics application computes a baseline for data configured for reporting, for example, utilization and throughput for a port in a Port LAG Details report, or bandwidth and data for an application group in a Router Level Usage Summary report with Baseline. See the *Analytics Report Catalog* and the *NSP User Guide* for more information about Analytics.

### 3.3.2 Baseline Analytics data storage

Baseline data is stored in Postgres, unless there is an auxiliary database enabled, in which case all collected data goes in the auxiliary database.

The following data is stored:

- statistics data collected during the configured window; see [General parameters](#)
- the calculated baseline for the window
- anomalies

By default, data is stored in Postgres for 35 days and in the auxiliary database for 90 days. These values can be changed using the RESTCONF API or by updating the age-out policy; see [2.14 “How do I edit an age-out policy?”](#) (p. 30).

### 3.3.3 General

The general parameters include the following:

- **Description**  
Add an optional description for filtering on the Baselines view.
- **Collection interval**



---

For MDM managed NEs, this represents the interval at which to collect the statistics, for example, every 30 seconds. For NEs managed by the NFM-P, this value is ignored and statistics are collected according to the settings configured in the NFM-P.

- **Season**

A season is the length of time statistics must be collected for a pattern to be seen. For example, for network traffic you can expect the data pattern to repeat on a weekly basis.

- **Window duration**

Window duration is the size of the data bucket for telemetry calculation. For example, a counter calculates the change between the first and last values taken during the window. The calculation used depends on the counter type parameter in the Filters & Counters panel.

- **Admin State and Training Status**

These parameters are enabled by default when a baseline is created. They can be changed in the Edit form.

- **Admin State**

- If the Admin State of a baseline is Enabled, NSP is monitoring the statistics.

- **Training Status**

- If the Training Status is Active, NSP is incorporating new information into the baseline's model. If the Training Status is paused, future anomalies will be detected against the expected values that are already calculated.

- If you are monitoring for error counters, such as packet loss, you can pause learning after a season with no errors, which sets the expected number of errors to zero, while continuing to monitor.

For example, if you create a baseline and set the Collection Interval to 30, the Season to 1 week, and the Window Duration to 15 minutes, the baseline subscription collects the statistics values every 30 seconds, calculates a baseline data point every 15 minutes, and assesses trends based on one week of data.

### 3.3.4 Filter & Counters

The Filter & Counters parameters declare the telemetry values to be collected, the counter types, and the resources of interest.

When a telemetry type is selected, the **+ COUNTERS** button becomes available.

You can configure one of the following counter types:

- **Counter:** a counter takes input counter values and calculates the change in value over the window. For example, if the counter represents the number of transmitted octets and windows are 15 minutes, a counter baseline value is the number of octets transmitted over 15 minutes.
- **Gauge:** a gauge takes input values and calculates the mean value over the window. For example, if the input value is octets per second over a 30 second period and windows are 15 minutes, a gauge baseline value is the mean octets per second over 15 minutes. An example of a gauge is CPU usage: it is a bounded value between 1 and 100%.
- **Sampled:** a sampled baseline takes sampled values and calculates the sample mean value over the window. Sampled values represent the value at the exact time the sample was taken, not the

---

value since the last sample was taken. For example, if CPU % is sampled every 2 minutes and windows are 15 minutes, a sampled baseline value is the sampled mean over the samples collected in the 15 minutes.

An example of a sampled value is latency.

Configure an object filter as needed to filter the available resources; see [2.5 “How do object filters work?”](#) (p. 20).

When at least one counter is added and a counter type is specified, the **VERIFY RESOURCES** button becomes available.

### 3.3.5 Detectors

A detector defines the rules for anomaly detection. The detector rule provides an acceptable range of expected values. If a detected value exceeds the range, it is marked anomalous.

Anomaly detection is optional.

A detector rule is composed of the following:

- algorithm — the formula to use to compare the expected and measured values
- comparison — greater than or less than
- evaluate what — value, rate, or bandwidth

The measured values may be converted to a rate or bandwidth to perform the evaluation:

- rate —  $\text{value} / \text{window}$
- bandwidth —  $(\text{value} * 8) / \text{window}$

- threshold — the end of the acceptable range

The comparison and threshold parameters define the range of acceptable values. For example, a rule could state that a value with an absolute Z-score greater than 2 is an anomaly.

#### Algorithms

You can define a rule based on an algorithm.

The following algorithms are suitable for most purposes:

- **Z-score**

This refers to the Z-score (number of standard deviations) of the measured value against the expected values. In this case, the expected value is the mean.

Formula:  $(\text{measured} - \text{expected}) / \text{stddev}$

- **Z-score absolute**

This refers to the absolute value of the Z-score of the measured value against the expected values. In this case, the expected value is the mean.

Formula:  $|( \text{measured} - \text{expected} ) / \text{stddev} |$

The Z-score algorithms are useful because they incorporate the standard deviation: in addition to recording how far the current value is from the mean, the algorithm also factors in the variability of

---

the values. This can be very important when deciding if a value is anomalous. If your values are highly variable, that is, the standard deviation is high, it is important to choose a Z-score algorithm.

You can also use one of the following:

- **relative difference mean**

This is the relative difference using the absolute value of the arithmetic mean of the measured and expected values.

Formula:  $|measured - expected| / (|measured + expected| * 0.5)$

This algorithm could be suitable if the standard deviation is very small, that is, if there is very little variation in the values.

- **relative change signed**

This is the relative change (including the positive or negative sign) between the measured and expected values.

Formula:  $(measured - expected) / |expected|$

- **relative change**

This is the relative change (with no sign) between the measured and expected values.

Formula:  $|measured - expected| / |expected|$

- **change over mean**

This is the change of the measured and expected values over the absolute value of the arithmetic mean.

Formula:  $(measured - expected) / (|measured + expected| * 0.5)$

- **change max score**

This is a score that becomes more sensitive as the measured or expected value approaches +/-100. This detector algorithm works well with percentages although it may have use with other types of values.

Formula:  $(sign(measured - expected) * (|measured - expected| + max(measured, expected))) / 200$

## 3.4 What should I know about baseline and anomaly detector creation?

### 3.4.1 Baseline best practices

When baselines are configured, NSP creates a baseline with the parameter values for each resource selected. For example, if you want to collect baseline values for 20 ports with the same telemetry type, configure the Create Baselines parameters and NSP will create 20 baselines.

Bulk creation of baselines can take significant time and resources to complete. If the bulk creation process is interrupted by a network disruption or user action, it results in failed or partial creation.

If a baseline creation process has been interrupted by a network problem or user action (such as a page refresh), incorrect entries may exist in the database. Contact Nokia support.

Keep these suggestions in mind:

- The collection interval configured in NSP is ignored by resources that are managed by NFM-P.

Instead, the collection interval of resources managed by NFM-P is determined by the corresponding NFM-P MIB entry policy.

- Use object filters in the Create Baselines form to target the resources you need.
- Avoid unfiltered baseline creation requests unless the network is limited in size.
- If you configure the Convert to Bitrate parameter for a baseline counter and want to detect anomalies, set the Evaluate What parameter in the detector rule to Bandwidth. Using a different evaluation setting results in a mismatch between the Anomalies list in Visualizations and the baseline and anomaly chart generated for the baseline.
- Ensure that you have enough time to wait for the creation operation to complete before configuring baseline creation.

The following table shows some average time frames for bulk baseline creation.

Number of baselines	Average maximum time required
100	30 s
1000	3 min
5000	15 min
10 000	30 min

**i** **Note:** The baseline subscriptions are created last, therefore no statistics are collected for any baseline in the group until the bulk creation is completed.

## 3.5 How do I create baselines?



### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

**i** **Important!** If you are creating multiple baselines, the create operation may take a long time and cannot be stopped. Ensure that you are able to wait for the operation to complete before proceeding. For example, average maximum time required for creation of 100 baselines is 30 s; average maximum time required for creation of 10 000 baselines is 30 min.

### 3.5.1 Steps

1

Open **Data Collection and Analysis Management, Baselines**.

- 
- 2 

---

Click **+ BASELINES**.
  - 3 

---

In the Create Baselines form that opens, configure the General parameters as needed.
  - 4 

---

Enter information in the Telemetry Type field. As you type, the field filters for available telemetry types to match your input.  
Choose the telemetry type you need from the list of matches.
  - 5 

---

Click **+ COUNTERS** .
  - 6 

---

In the **Add Counters** form that opens, choose the required counters and click **ADD**.
  - 7 

---

Configure the Counter parameters as needed.
  - 8 

---

Click **+ COUNTERS** to add additional counters.
  - 9 


---

In the **Object Filter** field, enter filtering information as needed to filter the collected data.  
As you type, the field provides suggestions for available filters to match your input and identifies incorrect syntax.
  - 10 

---

Click **VERIFY RESOURCES**.

NSP searches for resources that are collecting statistics to match the telemetry type and object filter.

 **Note:** NFM-P resources appear in the list after the NFM-P collects the statistics. Therefore, you need to wait for the current collection interval to end before the NFM-P resource appears in the list.

If needed, you can click **STOP VERIFICATION** at any time and **Edit Filters & Counters** to update the configuration and restart the verification process.
  - 11 

---

When the resources you need appear in the resources list, click **STOP VERIFICATION**.

---

**12** \_\_\_\_\_  
Select the resources you need in the resources list.

**13** \_\_\_\_\_  
In the Detectors panel, add a rule for each counter as needed:

1. Click **+ RULE**.
2. Configure the rule parameters.

Repeat steps **1** and **2** to add detector rules for other counters.

**14** \_\_\_\_\_  
Click **CREATE**.

**END OF STEPS** \_\_\_\_\_

## 3.6 How do I edit or delete baselines?

### 3.6.1 Steps

**1** \_\_\_\_\_  
Open **Data Collection and Analysis Management, Baselines**.

**2** \_\_\_\_\_  
Choose a baseline and click **⋮** (Table row actions), **Edit**.

**3** \_\_\_\_\_  
To stop or restart monitoring, change the **Admin State** parameter.  
If the admin state is Disabled, NSP stops monitoring the statistics.

**4** \_\_\_\_\_  
To stop or restart training, change the **Training Status** parameter.  
If the training status is Paused, new data will no longer affect the calculated baseline.


**5** \_\_\_\_\_  
To reset training:

1. If the Admin State is Enabled, select Disabled from the drop-down list and click **UPDATE**.
2. Click **RESET BASELINE WINDOWS** and click **APPLY** to confirm.
3. Wait a minimum of 15 min.  
You can close the form while you are waiting, if needed.
4. Click **RESET BASELINE WINDOWS** again and click **APPLY** to confirm.
5. Set the Admin State to Enabled and click **UPDATE**.

---

6

To edit detectors:

1. Click  (Delete) to remove the existing detector.
2. Click **+ RULE**.
3. In the Detector Rule form that opens, configure the new parameters.
4. Click **TEST** to preview how your changes will impact the range of expected values.
5. Click **ADD**.

---



7

Click **UPDATE**.

---

8

To delete baselines:

- a. Select one or more baselines and click , **Delete**.  
In the form that opens, confirm the deletion.
- b. From **Data Collection and Analysis Management, Subscriptions**, select a baseline subscription and click , **Delete**.  
Deleting the subscription also deletes all associated baselines.

---

END OF STEPS

## 3.7 What is a baseline chart?

### 3.7.1 Baseline charts

A baseline chart plots captured telemetry data for a specified period, along with baseline expected values and the range relative to the expected value that is considered normal by the anomaly detectors, that is, the range of values that are not anomalies.

Anomalies are indicated where they are detected.



**Note:** A baseline must be trained for at least one season before expected values can be charted. Detection of anomalies requires one or more seasons depending on the detector. See [3.3 "How do baselines and anomalies work?" \(p. 31\)](#) for more information.

---

## 3.8 How do I plot a baseline chart?



### CAUTION

#### Service Disruption

The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).

The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.

### 3.8.1 Steps

#### Create a chart

1

Open the **New Chart** form:

- From **Data Collection and Analysis Visualizations, Baseline Charts**, click **+ CHART**.
- From **Data Collection and Analysis Management, Baselines**, choose a baseline and click **⋮** (Table row actions), **Open in Data Collection and Analysis Visualizations**.

2

In the form that opens, configure the parameters in the top panel as needed:

- From the **Time Range** drop-down list, choose the amount of historical data you need to display.
- Click **Combine charts** to plot data from multiple data series on the same chart.

3

Click **+ BASELINES**.

The list of available baselines is populated.

4

Choose one or more baselines from the list and click **ADD**.

5

To save the chart:

1. Click **SAVE AS**.
2. In the window that opens, enter a name for the chart and add a description if needed.
3. Click **SAVE**.

The chart is added to the list.



---

6

Click **PLOT**.


END OF STEPS

---

### 3.8.2 Steps

#### Plot an existing chart

1

To edit a chart before you plot it, choose the chart and click  (Table row actions), **Edit**.


2


Edit the parameters as needed and click **PLOT**.

END OF STEPS

---

#### Result

Visualizations displays a chart view showing the baseline and anomaly data. From the chart view, you can change the information displayed: choose a different time range, click **Configure** to change the list of baselines or click , **Combine charts** to turn combined charts on or off.

Click  (Chart Details) to open the Chart Details panel on the right side of the chart view to show details about the resources.

Hover over any point on the chart to see measured values, expected values, and range at the indicated point.

## 3.9 How do I chart an anomaly?

### 3.9.1 Purpose

The Anomalies view shows the table of anomalies that have been detected and saved to the database. The table provides information about each anomalous value and why the value was flagged as an anomaly. You can filter the table according to the baseline name, resource, counter, or telemetry type.

### 3.9.2 Procedure

You can chart an anomaly from the **Data Collection and Analysis Visualizations, Anomalies** view.

1. Select the anomaly and click **Chart** .

The chart displays, showing the three hours before and after the selected anomaly.

2. From the chart form, click **Configure** to change the time range or add additional baselines if needed.



---

## 4 NSP Indicators

### Indicators


#### 4.1 What is an indicator?

##### 4.1.1 Indicators

An indicator is a subscription to a customized metric. Indicators allow you to define and track KPIs using a combination of telemetry data, arithmetic operators, and aggregation functions. Thresholds can also be included in the indicator, with actions that are triggered by threshold violations.




For example, you can create an indicator to track the average utilization of a three-node ring: utilization counters on the selected ports and LAGs in the ring are tracked and aggregated. Thresholds are set for rising and falling average utilization at specified values, generating alarms when the average utilization is outside the preferred range.

Creation of an indicator creates an indicator subscription to collect the required data.

 **Note:** Indicator subscriptions and telemetry subscriptions are separate. An indicator cannot be generated from data collected by a telemetry subscription.

On-demand NFM-P statistics cannot be used to create indicators.

Indicator charts and a list of threshold crossing events are available in Data Collection and Analysis Visualizations.

To open Data Collection and Analysis Visualizations for a selected indicator, choose the indicator and click  (Table row actions), **Open in Data Collection and Analysis Visualizations**. If the indicator has multiple outputs, choose the resources in the form that opens, click  (Add) and click  **OPEN IN DATA COLLECTION AND ANALYSIS VISUALIZATIONS**. The view opens to a New Chart form with the indicator resources selected.

RESTCONF APIs are available for NSP Indicators; see the Network Infrastructure Management API documentation on the [Network Developer Portal](#).

#### 4.2 How do indicators work?

##### 4.2.1 Indicator components

An indicator consists of the following components:

- [General parameters](#)
- [Filter & Counters](#)
- [Thresholds](#)

The components appear in the Create and Edit forms.

---

## 4.2.2 Sample indicator

An example indicator tracks average utilization for a three-node ring, sampling from four ports and a LAG in the ring. Alarms are generated if average utilization is increasing above 50% or decreasing below 5%.

## 4.2.3 General

The general parameters include the following:

- unique name and optional description

- **collection interval**

For NEs managed by MDM, this represents the interval for collecting the statistics (for example, every 30 s), while for NEs managed by the NFM-P, this value is ignored and statistics are collected according to the settings configured in the NFM-P.

- **window duration**

Window duration is the size of the data bucket for telemetry calculation.



**Note:** For simple indicators, that is, indicators with only one counter and no formula, there is no data bucket. The window duration is ignored; KPI values are calculated at the collection interval.

## 4.2.4 Counters&Formula

The Counters & Formula parameters declare the telemetry values to be collected and the operations and aggregation functions to apply. An object filter ensures that the data is collected on the resources of interest.

- **counters**

When a telemetry type is selected, the **+ ADD COUNTERS** button becomes available.

For the sample indicator, selecting the `/telemetry:base/interfaces/utilization` telemetry type allows collection of the input-utilization counter.

- **formula**

A formula applies arithmetic operators and aggregation functions to the counters. The following can be applied:

- arithmetic operators: addition, subtraction, multiplication, division, absolute value
- aggregation functions: minimum, maximum, sum, average

For the sample indicator, the formula is configured to provide an average of the counter value data.

See [4.3 “How do indicator formulas work?”](#) (p. 46) for details.

### Object filter

Configure an object filter as needed to filter the available resources; see [2.5 “How do object filters work?”](#) (p. 20).

When at least one counter has been selected, the **VERIFY RESOURCES** button becomes available. Check the contents of the resource list to ensure that your object filter is retrieving the correct objects.

---

For the sample indicator, the object filter determines the ports and LAGs to collect information from.


## 4.2.5 Thresholds

Thresholds define the preferred range of data values for the indicator. Thresholds are optional: you can create zero, one, or multiple thresholds, for increasing or decreasing values.

When the indicator is plotted in Visualizations, thresholds appear on the plot and threshold crossing events are indicated.

Each threshold can be configured to trigger one or more actions:

- **raise a threshold crossing alarm (TCA)**  
The TCA is raised in Current Alarms.
- **generate email**  
An email can be generated for each threshold crossing event or aggregated by time period or number of events.  
Email server settings must be configured in NSP Settings by an administrator.
- **output a message to a Kafka topic**  
The Kafka topic must already be created. The default topic is **nsp-act-action-event**.

 **Note:** Indicator alarms may still be raised shortly after a resource (for example, an NE) is unmanaged in NSP if statistics messages are already in the system waiting to be processed.

For the sample indicator, you can configure an example threshold, with:

- an increasing threshold for a value of 50
- an alarm action with major severity
- a falling threshold for a value of 5 with a Kafka message showing low utilization

This configuration allows for high and low utilization to be handled differently according to differing levels of urgency. If needed, another increasing threshold could be set at 40, for example, with warning severity, to tell operators that the ring may need attention.

### Threshold crossing alarms

Indicator TCAs appear in Current Alarms as alarms with Source System “fdn:app:nsp-indicator” and Alarmed Object Type “nsp-indicator:rta-indicator-rules/rule”. The Alarmed Object ID contains the indicator rule name and the Additional Text contains the threshold violation details.

The Object Full Name field contains the indicator name and the specific object instance. For aggregate TCAs, where the aggregation functions such as avg() or sum() are used, the threshold violation may be based on statistics from multiple objects, and therefore cannot be attributed to a single object instance. In this case, the Object Full Name field contains the name of the indicator rule.

Visibility of TCAs depends on user access control settings.

- Aggregate TCAs do not contain a Site ID or Site name, and are considered system level alarms. To view these alarms, the user must either have the Administrator role, or have both **Access to all Equipment** and **Access to all Services** enabled.

- If the user has access to certain NEs only, the user sees Indicator TCAs for those NEs, but no aggregate TCAs.

## 4.2.6 Simple and complex indicators

Simple indicators use a single counter and no formula. A simple indicator is evaluated every collection interval, for every resource returned by the object filter.

Complex indicators use one or more counters and a formula. A complex indicator uses counter statistics received during each window duration to aggregate each incoming counter from each resource into a counter function. This output is then, depending on the formula, used in arithmetic or aggregation operations, or both, to calculate the KPI.

## 4.2.7 Indicator data storage

Indicator data is stored in Postgres unless there is an auxiliary database enabled, in which case all collected data is stored in the auxiliary database.

By default, data is stored in Postgres for 35 days, and in the auxiliary database for 90 days. These values can be changed using the RESTCONF API or by updating the age-out policy; see [2.14 “How do I edit an age-out policy?”](#) (p. 30).

## 4.3 How do indicator formulas work?

### 4.3.1 Formula components

An indicator formula defines the calculation of a KPI value. A formula is optional if only one counter is configured.

Formulas are composed of the following components, combined as needed.

Component	Definition	Notes
Counter functions	Aggregation functions performed on a per-counter basis with one value output per counter for each resource. The output of the counter function is then used in the rest of the formula calculation. Counter functions are expressed as <i>counter_function</i> , for example, <code>input-utilization_avg</code> .	The following function types are available on a counter: <ul style="list-style-type: none"><li>• <code>sum</code>: adds up all samples received for the counter during the window duration. Sum is used for counted statistics such as octets or packets.</li><li>• <code>avg</code>: the average of all samples received for the counter during the window duration. Avg is used for rate or value statistics such as percentage or temperature.</li><li>• <code>min/max</code>: the minimum or maximum value of all samples received for the counter during the window duration.</li></ul>

What should I know about indicator creation and management?

Component	Definition	Notes
Arithmetic operations	Simple arithmetic operations using one or more counters received from each unique resource. These operations produce $n$ KPI outputs (one per resource), per window period. Operations can include counter functions and numbers. Negative numbers must be in parentheses. An example of an arithmetic expression is: $\{(\text{received-octets-periodic\_sum} - \text{transmitted-octets-periodic\_sum})\} * 8 / 60$	The following arithmetic operations can be performed: <ul style="list-style-type: none"> <li>• addition (+)</li> <li>• subtraction (—)</li> <li>• multiplication (*)</li> <li>• division (/)</li> <li>• absolute value (   )</li> </ul>
Aggregation functions	A formula can perform aggregations on one or more counters received from every resource. This aggregation produces a single indicator output (one KPI value for all resources) per window period. An aggregation operation can perform multiple aggregation operations and can include arithmetic operations. For example, a formula for average utilization in the sample indicator is: $\text{avg}(\{\text{input-utilization\_avg}\})$	The following aggregation operations are available: <ul style="list-style-type: none"> <li>• min</li> <li>• max</li> <li>• sum</li> <li>• avg</li> </ul>

An example formula combining the components is:  $\text{max}(\{\{\text{transmitted-octets-periodic\_sum}\} + \{\text{received-octets-periodic\_sum}\} * 8 / 60\}) / \text{sum}(\{\{\text{speed\_avg}\} * 100\})$

This formula creates a single mixed-expression-operator that has two aggregation operations: the first outputs the port with the maximum value of  $(\{\text{tx+rx}\} * 8 / 60)$ , the second sums the speed of all ports. These two outputs are then divided and the result multiplied by 100.

## 4.4 What should I know about indicator creation and management?

### 4.4.1 Indicator best practices

Keep the following notes in mind when creating and managing indicators:

- Consider the following when you set the collection interval and window duration:
  - The collection interval configured in NSP is ignored by resources that are managed by NFM-P. Instead, the collection interval of resources managed by NFM-P is determined by the corresponding NFM-P MIB entry policy.
  - When configuring an indicator with a formula for resources managed by NFMP, the window duration must be at least twice as long as, and be a multiple of, the NFM-P MIB policy. An example is a 5 min MIB policy and a 15 min window duration.
  - When configuring an indicator with a formula for resources managed by MDM, the window duration must be at least twice as long as, and be a multiple of, the collection interval.
- Avoid divide-by-zero scenarios when constructing formulas. Arithmetic operations that are divided by zero produce no output, while aggregation operations output zero from the operation that is divided by zero.
- Before completing indicator creation, it is the best practice to verify resources to ensure you see a reasonable value for each counter.

Certain counters may not be fully supported in an NE managed by NFM-P and they default to zero, which causes an unexpected calculated KPI value. Other counters may have an actual

---

value of zero. For example, a value of zero for a speed counter can indicate a down port—that is, an actual value of zero speed—or a counter that does not appear in the relevant mapping artifact.

- Clicking **VERIFY RESOURCES** in an indicator shows the network device identifiers for the resources that respond to the object filter. The network device identifier is the unique identifier included by the NE in the telemetry messages.

The network device indicator is also the NE identifier used for indicator charting and threshold events in Visualizations.

- If an indicator configuration is updated, the indicator restarts, causing an expected gap in data until it can start collecting data with the new window duration.
- Indicator data points are normalized to the start of the window duration. For example, for an indicator with a window duration of 15 min, the data point or threshold event at 16:15 on the chart represents the window from 16:15 to 16:30.
- Data points for simple indicators are output immediately after the window duration ends.
- Output from Indicators with formulas:

The data required by the formula must be received and processed after the window duration ends before generating the Indicator value.

Example: Indicators with a 5-minute collection interval and 15-minute window duration. The 15-minute collection window starts at midnight (00:00 to 00:15).

After the window closes, the indicator waits for the next set of messages to be received before proceeding to calculate the indicator value for the previous window. When a message is received with a time stamp after 00:15, it confirms that all messages from the 00:00 to 00:15 window have been received and the value can be calculated.

- Indicators with arithmetic operations require one additional collection interval.
- Indicators with aggregation operations require one additional collection interval and one window duration.
- Output from an indicator with an arithmetic formula requires an additional 5 minutes (the collection interval).

For example, consider formula: `{received-octets-periodic_sum}+{transmitted-octets-periodic_sum}`

The data point for the 00:00 to 00:15 collection window is processed at 00:20. The sum can be calculated when the next collection occurs and a value for after 00:15 is received.

- Output from an indicator with an aggregate formula requires an additional 20 minutes (the collection interval, plus the window duration).

For example, consider formula: `sum({received-octets-periodic_sum}+{transmitted-octets-periodic_sum})`

The data point for the 00:00 to 00:15 window is processed at 00:35.

The example formula is a sum of values which are collected at an interval. Each of these values is confirmed when the next interval starts, at 00:20. After the values are confirmed, the sum can be calculated. The sum is confirmed when another aggregated message from after 00:15 is received, at 00:35.



---

## 4.5 What is an indicator chart?

### 4.5.1 Indicator charts

Indicator charts are available with the NSP Network Infrastructure Management feature package.

An indicator chart plots calculated KPI data for a specified period along with configured thresholds. If at least one threshold has been defined; that is, the Thresholds Configured parameter is True, the threshold values are displayed when hovering on the far right-hand edge of the indicator chart.

Rising and falling thresholds appear on the chart as dotted lines. Threshold crossing events are indicated where they are detected.

## 4.6 What is a threshold crossing event?

### 4.6.1 Threshold crossing events (TCEs)

A threshold crossing event is a value that exceeds an indicator threshold. You can configure thresholds as part of indicator creation.

## 4.7 How do I create an indicator?



### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

### 4.7.1 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Indicators**.
- 2 \_\_\_\_\_  
Click **+ INDICATOR**
- 3 \_\_\_\_\_  
In the **Create Indicator** form that opens, enter a unique name for the indicator.
- 4 \_\_\_\_\_  
Configure the collection interval and window duration parameters.

---

5

If needed, click **APPLY TEMPLATE** at the top right of the window, select a template from the list, and click **APPLY**.

The parameters configured in the template appear in the **Create Indicator** form. These parameters can be changed.

---

6

Configure the counters and formula as needed:

1. Enter information in the **Telemetry Type** field. As you type, the field filters for available telemetry types to match your input.  
Choose the telemetry type from the list of matches.
2. Click **+ COUNTERS**.
3. If you have chosen more than one counter, a formula is required; see [4.3 "How do indicator formulas work?"](#) (p. 46).  
Enter information in the **Formula** field. As you type, the field identifies incorrect syntax.

---

7

In the **Object Filter** field, enter filtering information as needed to filter the collected data; see [2.5 "How do object filters work?"](#) (p. 20).

As you type, the field provides suggestions for available filters to match your input and identifies incorrect syntax.

---

8

Click **VERIFY RESOURCES** to ensure that the resources found by the object filter are correct for your requirements and that counter values are returned.

---

9

Configure thresholds as needed:

1. Click **+ THRESHOLD**.
2. In the **Add Threshold** window that opens, enter a threshold value in the **Threshold** field.
3. Choose a direction from the drop-down list.
4. Click **ADD**.
5. Add additional thresholds as needed.

---

10

Configure threshold actions as needed:

1. Click on a threshold you created in [Step 9](#).
2. Click **+ ACTION** and choose **Alarm**, **Email**, or **Kafka** from the drop-down list.
  - To configure an alarm, choose the severity from the drop-down list.

- To configure an email action, enter recipient email addresses, separated with commas, and enter boilerplate information in the Subject and Content fields.  
To aggregate emails, enable the Aggregation toggle and configure the parameters. For example, the default value of 5 in the Period and Number of Events fields will send an email every five min, and for every five threshold crossing events, whichever comes sooner.
- To configure a Kafka message, enter an existing topic name and enter the message information in the Content field.

3. Add additional actions for each threshold as needed.
4. Click **SAVE**.

---

**11**Click **CREATE**.

**Note:** If your formula does not include all the counters you selected, the **CREATE** button is dimmed. If you cannot create the indicator, check the Formula field to ensure all counters you selected are part of the formula and spelled correctly.

---

**END OF STEPS**

## 4.8 How do I edit or delete an indicator?



**Important!** When an indicator is changed, the current data window becomes invalid and a new data bucket is created starting from the next interval. Depending on the timing, up to two window periods of data could be missed.

### 4.8.1 Steps

---

**1**Open **Data Collection and Analysis Management, Indicators**.

---

**2**Choose an indicator and click (Table row actions), **Edit**.

---

**3**In the form that opens, update the parameters as needed and click **UPDATE**.

---

**4**

To delete an indicator:

Choose an indicator and click (Table row actions), **Delete**.

---

**END OF STEPS**

---

## 4.9 How do I plot an indicator chart?



### CAUTION

#### Service Disruption

The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).

The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.

### 4.9.1 Steps

#### Create a chart

1

---

Open the **New Chart** form:

- From **Data Collection and Analysis Visualizations, Indicator Charts**, click **+ CHART**.
- From **Data Collection and Analysis Management, Indicators**, choose an indicator and click **⋮** (Table row actions), **Open in Data Collection and Analysis Visualizations**.
  - If the indicator has multiple outputs, choose resources in the form that opens and click **☑ OPEN IN DATA COLLECTION AND ANALYSIS VISUALIZATIONS**.

2

---

In the window that opens, configure the parameters in the top panel as needed:

- From the **Time Range** drop-down list, choose the amount of historical data to display.
- Click **Combine charts** to plot data from multiple data series on the same chart.

3

---

Add indicator resources.

- a. Click **+ INDICATORS**.
- b. If a file icon appears in the Multiple column, the indicator resources are aggregated for the calculated KPI. Click **+** to add it to the chart.
- c. If a folder icon appears in the Multiple column, the KPI is calculated at the resource level for the indicator.

Add resources.

1. Choose an indicator and click **Select Resources** **☰**.
2. Choose a resource and click **Add** **+**.

Choose up to 10 indicator resources and click **ADD** at the bottom right of the window.

---

4

If you need to save the configuration as a chart:

1. Click **SAVE AS**.
2. In the window that opens, enter a name for the chart and add a description if needed.
3. Click **SAVE**.

The chart is added to the list.

---

5

Click **PLOT**.

END OF STEPS



---

## 4.9.2 Steps

### Plot an existing chart

---

1

- a. To plot an existing chart with no changes, choose a chart and click  (Table row actions), **Chart**.
- b. To edit a chart and plot it, choose the chart and click  (Table row actions), **Edit**.

---


2


Edit the parameters as needed and click **PLOT**.

END OF STEPS

---

### Result

Visualizations displays a chart view showing the KPI data. From the chart view, you can change the information displayed: choose a different time range, click **Configure** to change the list of indicators, or click **More** , **Combine charts** to toggle between a combined chart for all selected indicators and separate charts.

Click  (Chart Details) to open the Chart Details panel on the right side of the chart view to show details about the resources.

Hover over any point on the chart to see measured values at the indicated point. Hover over the far right edge of the chart to show the configured thresholds.


## 4.10 How do I chart a threshold crossing event?

### 4.10.1 Purpose

The **Data Collection and Analysis Visualizations, Threshold Crossing Events** view shows the table of threshold crossing events that have been detected and saved to the database. The table provides information about each threshold crossing value and the indicator the threshold is configured on.

### 4.10.2 Procedure

You can chart a threshold crossing event from the **Data Collection and Analysis Visualizations, Threshold Crossing Events** view.

1. Open **Data Collection and Analysis Visualizations, Threshold Crossing Events**.
2. Select the threshold crossing event and click **Chart** .  
The chart displays, showing the three hours before and after the selected event.
3. From the chart, click **Configure** to change the time range or add additional indicators if needed.

---

## Indicator templates

### 4.11 What is an indicator template?

#### 4.11.1 Indicator templates

An indicator template is a set of parameters that a user can optionally employ to create an indicator.

When a template is applied, the configuration information in the template is copied to the indicator configuration. The indicator parameters provide the object filter, collection interval, and window. That is, the KPI is defined in the template and the KPI object and collection details are defined in the indicator. Thresholds are optional and can be configured in the template or the indicator.

For example, a template can be created for average port utilization. An indicator created from the template specifies the port and configures the data collection.

### 4.12 How do I create an indicator template?



#### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

#### 4.12.1 Steps

1

From the **Data Collection and Analysis Management, Indicator Templates** view, click **+ TEMPLATE**.

2

In the **Create Indicator Template** form that opens, enter a name for the template.  
The name must be unique.

3

Enter a description and units as needed.

4

Enter information in the **Telemetry Type** field. As you type, the field filters for available telemetry types to match your input.

Choose the telemetry type from the list of matches.

---

5

Click **+ COUNTERS**.

---

6

If you have chosen more than one counter, a formula is required; see [4.3 “How do indicator formulas work?”](#) (p. 46).

Enter information in the **Formula** field. As you type, the field identifies incorrect syntax.

---

7

Configure thresholds as needed:

1. Click **+ THRESHOLD**.
2. In the Add Threshold window that opens, enter a threshold value in the Threshold field.
3. Choose a direction from the drop-down list.
4. Click **ADD**.
5. Add additional thresholds as needed.

---

8

Configure threshold actions as needed:

1. Click on a threshold you created in [Step 7](#).
2. Click **+ ACTION** and choose Alarm, Email, or Kafka from the drop-down list.
  - To configure an alarm, choose the severity from the drop-down list.
  - To configure an email action, enter recipient email addresses, separated with commas, and enter boilerplate information in the Subject and Content fields.

To aggregate emails, enable the Aggregation toggle and configure the parameters. For example, the default value of 5 in the Period and Number of Events fields sends an email every 5 min and for every five threshold crossing events, whichever comes sooner.
  - To configure a Kafka message, enter an existing topic name and enter the message information in the Content field.
3. Add additional actions for each threshold as needed.
4. Click **SAVE**.

---

9

Click **CREATE**.



**Note:** If your formula does not include all the counters you selected, the **CREATE** button is dimmed. If you cannot create the template, check the Formula field to ensure all counters you selected are part of the formula and spelled correctly.

---

END OF STEPS



---

## 4.13 How do I edit an indicator template?

### 4.13.1 Steps

- 1 \_\_\_\_\_  
From the **Data Collection and Analysis Management, Indicator Templates** view, choose a template.
- 2 \_\_\_\_\_  
Click **:** (Table row actions), **Edit**.
- 3 \_\_\_\_\_  
In the form that opens, update the parameters as needed and click **UPDATE**.

END OF STEPS \_\_\_\_\_

## 4.14 How do I delete an indicator template?

### 4.14.1 Steps

- 1 \_\_\_\_\_  
From the **Data Collection and Analysis Management, Indicator Templates** view, choose a template.
- 2 \_\_\_\_\_  
Click **:** (Table row actions), **Delete**.

END OF STEPS \_\_\_\_\_



---

## 5 OAM tests

### Tests

#### 5.1 What can I test in NSP?

##### 5.1.1 Available test types

You can create the following OAM tests:

- CFM DMM
- CFM Linktrace
- CFM LMM
- CFM Loopback
- CFM SLM
- Twamp-light

Tests are created using test templates. Before a test can be created, at least one test template must exist for the test type.

Tests can be created at any time. No additional configuration is required on the tested objects for testing to be performed.

RESTCONF APIs are available for MD-OAM configuration and testing; see the Network and Service Assurance API documentation on the [Network Developer Portal](#).

##### 5.1.2 Data storage for OAM results

By default, OAM test data is stored in Postgres unless there is an auxiliary database enabled, in which case result data is stored in the auxiliary database.

NFM-P SNMP test results are collected from Kafka. Kafka must be enabled in the NFM-P for NSP to receive the results. Kafka is enabled by default for most test types except NFM-P resynched tests. You must enable Kafka in the NFM-P for NSP to receive the results of these tests.

#### 5.2 What is CFM?

##### 5.2.1 Connectivity Fault Management

Ethernet Connectivity Fault Management in NSP is implemented based on the IEEE Y.1731 and 802.1ag OAM standards. The standards describe protocols for detecting, isolating, and reporting connectivity faults in an Ethernet network. CFM is a Layer 2 OAM object infrastructure.

You can use Ethernet CFM for the following:

- path discovery
- fault detection
- fault isolation

- fault notification

The following table describes terms relevant to CFM in NSP.

Term	Expansion	Notes
MD	Maintenance domain	MD is the administrative container that defines the scope, reach and boundary for CFM message handling. It is typically the area of ownership and management responsibility. MD levels are in the range of 0 to 7, where the larger the domain, the larger the MD level assigned.
MA	Maintenance association	MA is the construct where the different management entities such as MEPs are contained. An MA is created within an MD. There is also an administrative context where a linkage is made between the domain and the service using the MA bridging-identifier configuration option.
MEG	Maintenance entity group	Typically, a MEG represents one service and consists of a group of MEPs. Only one MEG can be associated with a service, but one service can be associated with multiple MEGs. MDs and MEGs are distributed to NEs using policy distribution.
MEP	Maintenance end point	MEPs are the entities at the edge of a CFM MD and define the boundary for the domain. MEPs are responsible for initiating, processing, and terminating CFM messages. Each MEP with the same MD and MA represent endpoints for a single service.

## 5.3 How do OAM tests work?

### 5.3.1 CFM test types

CFM and Twamp-light session tests are supported.

PM session CFM testing is based on Metro Ethernet Forum Specification 35 - Service OAM Performance Monitoring Implementation Agreement, which details a standardized method to test and report network delay and loss using CFM messaging. This testing is performed in Layer 2 networks.

The PM session testing framework can also be used in the IP domain to perform TWAMP IP level monitoring, and runs over IPv4 and IPv6 addresses. TWAMP Light tests target Layer 3 interfaces, providing an option to monitor IP SLA performance as related to KPIs.

---

### 5.3.2 CFM DMM

For CFM Delay Measurement Message (DMM) tests, calculations are made to report on three criteria: frame delay, frame delay range, and interframe delay variation. DMM test frames are issued at regular intervals from a source MEP. Delay measurement information for the forward, backward, and round trip paths is determined from the DMR frames received from the destination MEP.

### 5.3.3 CFM linktrace

CFM link trace messages that contain a target unicast MAC address are sent to multicast destination MAC addresses. Each MIP at the same MD level replies with a link trace response. Messages are forwarded to the next hop until they reach the destination MAC address.

### 5.3.4 CFM LMM

The CFM Loss Measurement Message (LMM) single-ended session test is a method of exchanging transmit and receive counters between peer MEPs to determine exact loss on a point-to-point Ethernet virtual circuit.

The following validations are performed:

- The LMM test suite tests can only be created or executed for MEG subgroups with exactly two MEPs.
- The LMM test suite tests can only be executed if the source and target MEPs are not already the source or target MEPs (respectively) of a currently running LMM test.

### 5.3.5 CFM loopback

CFM loopback messages are sent to a unicast destination MAC address. The MEP at the destination responds to the loopback message with a loopback reply. A MEP or a MIP can reply to a loopback message if the destination MAC address matches the MAC address of the MEP or MIP. CFM loopback tests verify connectivity to a specific MEP or MIP.

You can also perform multicast loopbacks by providing a multicast address (class 1 multicast destination) that aligns with the level that the originating MEP is configured on. Only one multicast test can be run at a time per NE, and results from the previous test are deleted when a new test is started. The stored values include the responding MEP MAC address, the sequence number, and a locally-assigned Rx index (allowing you to detect out-of-order responses).

### 5.3.6 CFM SLM

The CFM Synthetic Loss Measurement (SLM) session test is an extension of the Y.1731 standard that provides a method of exchanging transmit and receive counters to determine frame loss between a MEP and the destination MAC address or remote MEP ID of another node in the network. This test is used to verify MEP-MEP connectivity in the network and can be used to approximate the frame loss of actual data traffic. CFM SLM session tests measure frame loss using synthetic frames rather than data traffic. Frame loss is measured by calculating the difference between the number of synthetic frames that are sent and received.

---

### 5.3.7 Twamp-light

Twamp is a delay/loss measurement protocol that uses both the TCP connection service and the UDP session service.

Twamp-light tests can operate on a base router or on routing instances belonging to L3VPNs. The target, or destination entity, requires configuration of a Twamp-light reflector with a prefix associated with the Twamp-light test source IP address and a specified UDP listening port in the range specified for the NE type. For example, the 7750 SR Twamp-light reflector destination port range is 864, 64364-64373. A target node requires a configured reflector for the base router instance or for each of the tested L3VPN-based virtual routing instances.

Twamp-light tests require a UDP source port in range undefined or configured in the NE range and a UDP destination port that matches the target device reflector UDP listening port.

Twamp reflectors, Twamp servers, and streaming templates cannot be configured in NSP. They can be discovered from the router configuration or configured using RESTCONF; see the OAM Tests tutorial on the [Network Developer Portal](#) for RESTCONF information.

See the **Data Collection and Analysis Management, Config Objects** view for the list of configured Twamp reflectors.

#### Twamp-light test types

You can configure a Twamp-light test to record delay, loss, or delay and loss statistics. Delay tests provide streaming results, accounting-session, and accounting-bin type results; loss tests provide accounting-loss-session type results. Streaming results require configuration of a streaming delay template. The streaming template defines the frequency at which real-time streaming results are received.

Accounting type results require configuration of an accounting policy, a file policy, and associated Twamp-light measurement interval configuration.

## 5.4 How do I create an OAM test?


### 5.4.1 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Tests**.
- 2 \_\_\_\_\_  
Click **+ TEST**.
- 3 \_\_\_\_\_  
In the Create OAM Test form that opens, select the Test type and Entity type.

---

4

Click on the Service field if applicable.

1. Select an attribute in the drop-down list, then enter values for that attribute in the field. As you type, the list is filtered for services that match your input.
2. Click  as required to add additional filter criteria.
3. Choose an entity from the list and click **SELECT**.

---


5

Select an entity reference type if applicable.

---

6


Click on the Source test entity field.

1. Select an attribute in the drop-down list, then enter values for that attribute in the field. As you type, the list is filtered for entities that match your input.
2. Click  as required to add additional filter criteria.
3. Choose an entity from the list and click **SELECT**.

---

7

Click on the Destination test entity field.

1. Select an attribute in the drop-down list, then enter values for that attribute in the field. As you type, the list is filtered for entities that match your input.
2. Click  as required to add additional filter criteria.
3. Choose an entity from the list and click **SELECT**.

---

8

Choose a test template. The test parameters are displayed.

---

9

Configure the test parameters.

---

10

Verify the parameters in the Advanced field.

---

11

Click **CREATE**. The test appears in the list of tests.

---

**END OF STEPS**

---

## 5.5 How do I execute an OAM test?

### 5.5.1 Steps

1

Open **Data Collection and Analysis Management, Tests**.


2

In the **Filter** column at the left of the view, configure a filter and click **RETRIEVE**. The list of tests is populated, filtered according to your input.




**Note:** You can sort the list by clicking on a column header; however, the sorting function is not available for all columns.

3

Choose a test and click  to open the **Test Details** panel to verify that the test parameters meet your needs. If the **Deployed state** parameter is Deployed, the NSP has received confirmation from the MDM server that mediation was successful.

4

From your selected test row, click  (Table row actions), **Execute**. The Execute dialogue opens.

5

Configure the required parameters and click **EXECUTE**.

- The Sync mode parameter specifies whether or not execution requests generate notifications in the GUI. The **Sync-execute** option (default) provides a notification if the execution fails.
- The Result Classifier parameter specifies the name of the result classifier used to determine test success or failure. Result classifiers are configurable using a REST API. Check the **Perform result classification** check box to apply the classifications.
- The **Publish results** check box publishes results to Kafka.
- The **Save results to database** check box makes results available to the NSP GUI. If this box is not checked, the GUI does not display results of the test.

6

To stop a test that is running, choose the test in the list and click  (Table row actions), **Stop**.

END OF STEPS

---

## 5.6 How do I edit an OAM test?



**Note:** The Edit function is not available for tests that are discovered from the NE.




---

## 5.6.1 Steps

1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Tests**.

2 \_\_\_\_\_  
In the **Filter** column at the left of the view, configure a filter and click **RETRIEVE**. The list of tests is populated, filtered according to your input.

 **Note:** You can sort the list by clicking on a column header; however, the sorting function is not available for all columns.

3 \_\_\_\_\_  
Choose a test and click  (Table row actions), **Edit**.

4 \_\_\_\_\_  
In the form that opens, update the parameters as needed and click **UPDATE**.


END OF STEPS \_\_\_\_\_

## 5.7 How do I edit or delete an OAM test?

### 5.7.1 Steps

1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Tests**.

2 \_\_\_\_\_  
In the **Filter** column at the left of the view, configure a filter and click **RETRIEVE**. The list of tests is populated, filtered according to your input.

 **Note:** You can sort the list by clicking on a column header; however, the sorting function is not available for all columns.

3 \_\_\_\_\_  
Choose a test and click  (Table row actions), **Delete**.

END OF STEPS \_\_\_\_\_

---

## 5.8 How do I view OAM test results?

### 5.8.1 Purpose

Use this procedure to view results of tests. Test results are available in the NSP GUI for tests configured from the GUI or from the RESTCONF API, as long as the original configuration specifies that results are published to the database. Tests created from NE CLI or another network manager are not processed within the NSP. .

Twamp-light delay results can also be provided in an accounting file, in the classes `telemetry:/base/oampm-accounting/twl-session-acc-stats` and `telemetry:/base/oampm-accounting/twl-bin-acc-stats`. Twamp-light loss results are available in an accounting file in the class `telemetry:/base/oampm-accounting/twl-session-loss-acc-stats`

### 5.8.2 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Tests**.
- 2 \_\_\_\_\_  
In the **Filter** column at the left of the view, configure a filter and click **RETRIEVE**. The list of tests is populated, filtered according to your input.  
**i** **Note:** You can sort the list by clicking on a column header; however, the sorting function is not available for all columns.
- 3 \_\_\_\_\_  
To view test information, choose a test and click **Test Details** ⓘ.  
The Test Details panel shows the test attributes, and the Tested Entities panel shows the list of entities. Information provided depends on the test type.
- 4 \_\_\_\_\_  
To view results of a test, select the test and click ⓘ (Table row actions), **View Results**.  
The Test executions page opens, showing the executions and their results. Use the drop-down lists to filter by time frame and telemetry type as needed.  
**i** **Note:** After a test has executed, there is a brief processing delay before results are available. For tests that have just finished running, Nokia recommends that you wait a minimum of 5 s before viewing results.
- 5 \_\_\_\_\_  
Select a different time range for the test executions, if required. Choose a range from the drop down list, or configure a customized time range.


---

**6**

If required, choose a telemetry type from the drop-down list.

---

**7**


To see additional information columns on the Test executions page, click  (Table row actions), **Manage Columns**. Select or de-select columns to suit your information needs.



**Note:** The sorting function is not available for columns on the Test executions page. By default, executions are sorted by Time Captured.

---

**8**

For more detailed information about a specific test, choose an execution and click **Test result details** .

Information provided depends on the test type.

---

**END OF STEPS**

## 5.9 How can I troubleshoot Twamp-light test issues?

### 5.9.1 Troubleshooting suggestions

The following guidelines apply to Twamp-light tests, but may also be useful for other test types. Contact support if you need further assistance.

- The test doesn't start.  
Usually, errors on test execution occur when there is a difference in state between the NSP and the NE or if test attributes are outside the accepted range of the NE. In this case, follow guidance from the error or warning message returned when the test is started. Executing the test in sync-mode "sync-execute" ensures that the most complete error and warning messages are shown.
- The test starts and results are received, but the packet counts and delay values are all zero.
  - Confirm that the destination address is reachable from the NE executing the test.
  - Confirm that the Twamp-light reflector is enabled, that the test dst-udp-port parameter matches the reflector listening port, and that the Twamp-light reflector has a matching prefix for the test src IP address parameter.
- The test starts but no results are observed.
  - Check the execution status to confirm that the test is executing.
  - Confirm the test type and the expected result classes. Verify from the results class (streaming or accounting) the expected delay until the first result should arrive. Confirm that the correct class of result is selected, and click **Refresh Results** to trigger result retrieval from results stored to the database.
  - Confirm that the configuration is correct and complete: the deployment state is "deployed", the streaming template is defined (for intended streaming delay results), the bulk result is true (for intended accounting results), and properties (IP addresses, UDP ports, measurement interval) are correct.

How can I troubleshoot Twamp-light test issues?

---

- If streaming test results are intended, validate the configuration and status of the streaming delay template (especially the admin state and sample window period).
- Validate telemetry subscriptions for the test classes: telemetry subscriptions are created automatically for tests created in the NSP. The subscription name format is `TestSuiteEx_OAM-PM-test_type-statistic-type`; for example, the subscription for Twamp-light delay streaming statistics would be named `TestSuiteEx_OAM-PM-TWAMP-streaming`.
- Validate the Twamp-light reflector configuration:
  - Does the target node have a deployed, enabled reflector?
  - Does the UDP port match those of configured tests?
  - Is the reflector on the correct routing instance (router- or service-based)? Twamp-light reflector prefixes can be viewed from the RESTCONF API.
- Validate the bin group information for accounting type results: confirm that the bin group configured in the test is configured on the node and that admin state is enabled. Details of bin groups may be configured or retrieved using RESTCONF API or discovered from node configuration.

---

## Test Suites


### 5.10 What is an OAM test suite?

#### 5.10.1 OAM test suite

A test suite is a collection of tests that are grouped together to allow for multiple tests to be executed together or run in sequence. The suite includes both the tests and, where applicable, instructions for running tests sequentially or in parallel. Test suites can provide improved automation for OAM testing.

NSP provides a read-only list of test suites created in the MD-OAM RESTCONF API and in NSP.

See the OAM Tests tutorial on the [Network Developer Portal](#) for information about using the API.

 **Note:** On-demand test suites can be created and executed for LMM and SLM tests, but results may not be available to be shown.

### 5.11 How do I create an OAM test suite?

#### 5.11.1 Steps


- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Test Suites**.
- 2 \_\_\_\_\_  
Click **+ SUITE**.
- 3 \_\_\_\_\_  
In the Generate OAM Tests form that opens, choose a Test type.  
The list of templates in the Template field is updated based on your selection.
- 4 \_\_\_\_\_  
Choose a test template if needed.  
If a template is not selected, an appropriate system template is automatically selected based on the value of the execute type field. If a template is selected, the value of the execute type field is imported from the template and is read-only in the form.
- 5 \_\_\_\_\_  
Add one or more entities:
  1. Choose an entity type from the Entity type drop down.
  2. Click **+ SELECT** to open a selection form.
  3. Choose one or more entity objects from the list to add them to the Bin. Use the page selectors to navigate the list.

4. Verify the list of entity objects in the Bin and click **SELECT**.
5. To change the list of selected entities, repeat the previous steps to re-create the list.

6

---

Click on the Service field if applicable.

1. Select an attribute in the drop-down list, then enter values for that attribute in the field. As you type, the list is filtered for entities that match your input.
2. Click  as required to add additional filter criteria.
3. Choose entities from the list and click **SELECT**.

7

---

Configure the test parameters as needed.

8

---

Generate the test suite.

- a. To automatically execute the test suite after generation, enable Execute and click **GENERATE & EXECUTE**.
- b. To create the test suite without automatically executing, disable Execute and click **GENERATE**.

END OF STEPS

---

## 5.12 How do I stop or start an OAM test suite?

### 5.12.1 Steps


1

---

Open **Data Collection and Analysis Management, Test Suites**.

2

---

Choose a test suite and click  (Table row actions), **Execute**.

3

---

In the form that opens, update the parameters if needed and click **EXECUTE**. The execution status is updated to Running.




**Tip:** Disable the **Publish results** parameter if you don't need results published to kafka. This may reduce processing impact.

How do I edit or delete an OAM test suite?

---

4

To stop a test suite that is running, choose the test suite in the list and click  (Table row actions), **Stop**.

END OF STEPS

---

## 5.13 How do I edit or delete an OAM test suite?

### 5.13.1 Supported functions

Test suites can only be modified using the MD-OAM RESTCONF API.

To delete a test suite, choose a test suite and click  (Table row actions), **Delete**.

Deleting a test suite deletes all associated tests.

## 5.14 How do I view OAM test suite results?




**Note:** After a test has executed, there is a brief processing delay before results are available. For tests that have just finished running, Nokia recommends that you wait a minimum of 5 s before viewing results.

### 5.14.1 Steps


1




Open **Data Collection and Analysis Management, Test Suites**.

2

Choose a test suite and click  (Table row actions), **View Details**.

The View Test Suite Details page opens, showing the following:

Tab	Notes
AGGREGATED RESULTS	Each row of the aggregated results table corresponds to an execution of the test suite. Whenever the test suite is successfully started, a new aggregated results row is added.  To view the individual results for a specific test suite execution, select the aggregated results row corresponding to the execution you are interested in and click <b>View individual results</b>  .
LIFECYCLE RESULTS	The LIFECYCLE RESULTS table shows events from the execution of the test suite, such as stop and start timestamps and error events.

Tab	Notes
INDIVIDUAL RESULTS	<p>The page displays the results of each test executed.</p> <p>By default, the results from the most recent test suite execution are shown, that is, the execution ID from the first row of the aggregated results table is chosen automatically. You can view results for other test suite executions by specifying another execution ID in the <b>Test suite execution ID</b> field or by returning to the AGGREGATED RESULTS tab and clicking <b>View individual results</b> .</p> <p>For more detailed information about a specific test, choose an execution and click <b>View Results</b> .</p> <p><b>Note:</b> If a test suite was created from the NSP, the tests will all be the same type. If the test suite was created using RESTCONF, multiple test types could be included. To view results from a different type than is currently displayed, choose the telemetry type from the drop down list.</p> <p>See the <b>TESTS</b> tab for a list of tests in the suite.</p>
GENERATION LOG	<p>The page displays log information from the generation of the suite and tests.</p>
TESTS	<p>The page lists the test identifiers included in the suite.</p> <p>If the test suite is an on-demand suite, the TESTS tab shows the included tests grouped by stage.</p> <p>Stages are executed sequentially, but tests within each stage will be executed either sequentially or in parallel depending on how the stage is configured.</p> <p>For more detailed information about a specific test, double click on an execution or choose an execution and click <b>View Results</b> .</p>

END OF STEPS



---

## Test Templates

### 5.15 What is an OAM test template?

#### 5.15.1 OAM test template

An OAM test template is a set of parameters that a user can employ to create or customize a test for a particular use case. You can create a template for each test type, or create separate templates for different use cases. The test template becomes the form used to create and run the test in the future.

On-demand templates are for tests that run a single execution; proactive templates are for tests that execute repeatedly.

### 5.16 How do test templates work?

#### 5.16.1 Template parameters

A test template includes all the parameters for a test. The template creator can set the parameters or leave them blank and can choose whether the parameter is visible or editable when the template is used.

When a test is created from the template, the parameters are applied as follows.

- If the template creator sets the parameter value in the template and does not set the parameter instance as editable, the test runs with the value set in the template.
- If the template creator sets the parameter instance as editable, the test runs with the value set by the user who creates the test. The template creator can also set the parameter value, creating a template default.
- If the template creator does not set the parameter value and does not set the parameter instance as editable, the test runs with the default value in the YANG model, if applicable.

Test templates can use variable substitution to autopopulate some values, based on entity mapping in the YANG model. The definition of a variable has the following syntax:

```
${variable-name}
```

For example, "`service:${service-name}`" is resolved from the current test object after any source/destination entities are resolved.

For more information about variable substitution, see the OAM Tests tutorial on the [Network Developer Portal](#).

### 5.17 What is a system template?

#### 5.17.1 System template

System templates are available to NSP for test creation.

An operator can create tests using any template. However, when the NSP creates a test, it must use a system template. This requirement includes test suites created by an operator.

---

Default system templates are provided with installation of the NSP. You can modify these templates and add additional ones.

## 5.18 How do I create an OAM test template?



### CAUTION

#### Service Disruption

*The name of an object, including subscriptions, baselines, indicators, templates, and chart profiles, cannot contain a semicolon (;) or backslash (\).*

*The use of these characters in an object identifier will result in corrupted data that must be deleted by Nokia support.*

### 5.18.1 Steps

1

Open **Data Collection and Analysis Management, Test Templates**.

2

Click **+ TEMPLATE**.

3

In the Create Test Template form that opens, configure the template settings in the panel on the left.

By default, the settings are not visible or editable at test creation. Enable visibility or editing for each setting as needed. When you enable editing, visibility is automatically enabled.

- Configure the **Execute type** parameter to configure the template as On-demand or Proactive.
- Select **System Template** to configure the template as a system template.

4

View the test creation form layout in the panel on the right side of the page. Drag the fields to change the order if needed.

5

Click **CREATE**.

**END OF STEPS**

---

---

## 5.19 How do I edit an OAM test template?

### 5.19.1 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Test Templates**.
- 2 \_\_\_\_\_  
Choose a template and click **⋮** (Table row actions), **Edit**.  
Use the **All Templates** drop-down list if required to filter the list to show only on-demand or proactive templates.
- 3 \_\_\_\_\_  
In the form that opens, update the parameters as needed and click **UPDATE**.

END OF STEPS \_\_\_\_\_

## 5.20 How do I delete an OAM test template?

### 5.20.1 Steps

- 1 \_\_\_\_\_  
Open **Data Collection and Analysis Management, Test Templates**.
- 2 \_\_\_\_\_  
Choose a template and click **⋮** (Table row actions), **Delete**.
- 3 \_\_\_\_\_  
Click **DELETE** to confirm the deletion.

END OF STEPS \_\_\_\_\_

## Config Objects

### 5.21 What is a config object?

#### 5.21.1 Definition

A config object represents an OAM configuration object that is used for testing, other than the test object itself.

NSP provides a list of configuration objects. Click on the object type drop-down list to switch to the list for a different object type.

### 5.22 What config objects are available in NSP?

#### 5.22.1 Objects presented

The following table describes the available configuration objects.

Configuration object type	Description	Notes
Bin Group	A bin group is a template of Performance Measurement histogram measurement bin definitions. Bin groups contain measurement bins, which count instances of frame delay (FD), frame delay range (FDR), or interframe delay variation (IFDV) metrics within a defined range of lower to upper threshold values. Bin group definitions may also include definitions for delay-event thresholds and calculation of average FD, FDR, and IFDV values.	Bin groups define a service level agreement quality quantitatively. Service offerings with differentiated service level agreements may be measured using different bin groups.
CFM Domain	CFM Maintenance Domain (level 0 to 7)	Each MD can include multiple MAs.
CFM Association	CFM maintenance associations.	Auto-configuration of MAs is supported when creating CFM based tests
CFM MEP	CFM maintenance entity point. A MEP is an end point in an MA, on which CFM tests can be performed. Each MEP with the same MD and MA represents endpoints for a single service.	Auto-configuration of MEPs is supported when creating CFM based tests. Service MEPs, such as SAPs, and facility MEPs, such as LAGs, are supported.
Streaming Delay Template	A template that defines real-time measurement of FD and IFDV from delay-based Performance Management tests. Average values are calculated over 10-to-60 second intervals and stream in real-time.	NSP supports delay streaming using gNMI, for 7750 SR NEs.

Configuration object type	Description	Notes
Twamp Server	TWAMP is a delay/loss measurement protocol that uses both the TCP connection service and the UDP session service. A TWAMP server may be configured to accept TCP control connections from a specified range of IP networks and TCP ports; also, it will accept requests for clients to initiate UDP test sessions for specific IP address or UDP port pairs on the service router.	—
Twamp-light Reflector (Router)	A Twamp-light reflector controls the set of IP network and UDP ports where the service router replies to TWAMP-light test messages. TWAMP light reflectors may be configured for both base and service routing instances.	Auto-create/update of TWAMP-light reflectors is supported when starting TWL based tests.
Twamp-light Reflector (Service)		

## 5.23 How do I create a config object?

### 5.23.1 Creation support

Config objects are created using RESTCONF, using classic IP mediation, or, for CFM objects in particular, can be auto-generated when CFM tests are created.

## 5.24 What can I do with config objects in NSP?

### 5.24.1 Supported operations

You can sort or filter the lists or click  (Delete) to delete a config object.

Any other actions must be done using RESTCONF or classic IP mediation, depending on how the object was created.



---

# Part II: Use cases

## Overview

### Purpose

Describes use cases for Data Collection and Analysis Management and Data Collection and Analysis Visualizations.

### Contents

<a href="#">Chapter 6, Telemetry management use cases</a>	81
<a href="#">Chapter 7, Chart use cases</a>	107





---

## 6 Telemetry management use cases

### 6.1 Installing and locating specific telemetry types

#### 6.1.1 Purpose

This use case shows how to use NSP to set up and locate the telemetry types needed for a sample use case.

In this scenario, we want to start monitoring the aggregate dropped packet count for egress traffic on VPRN SAPs on SR OS devices. We need to install the required files and confirm the telemetry types we'll need to create subscriptions for.

#### 6.1.2 Steps

1

---


Obtain the required vendor agnostic (va) CR bundles from the [Nokia NSP software download site](#):

1. Choose the release, Adaptors, and the adaptor type.

For this example, we'll choose **23.11, Adaptors, Nokia\_SROS**.

2. The list of available downloads is displayed. Choose the zip file with va and cr in the filename.

For this example, we'll choose `nsp-telemetry-cr-va-sros-1.0.0-rel.10.zip`.

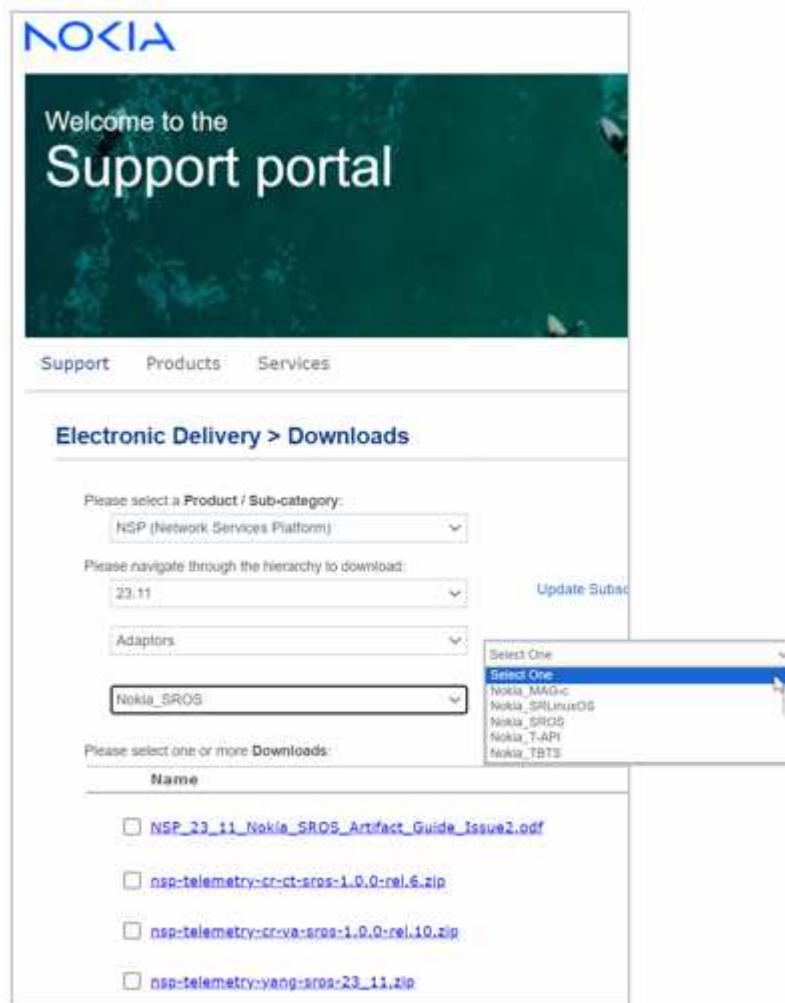

2

Install the artifact bundle from the **Artifacts, Artifact Bundles** view; see “How do I install an artifact bundle?” in the *NSP Network Automation Guide*.

The telemetry types in the va bundle are now available in the Telemetry Statistic Search Tool.

3

Check the Telemetry Statistic Search Tool:

1. Open the NSP Help Center. From the Help Center home screen, navigate to **REFERENCE, Statistic Search, Telemetry Statistic Search**.
2. Enter “aggregate-dropped” in the Counter Name field. The search tool filters for telemetry types with aggregate-dropped in the counter name.  
Enter additional filters as needed to narrow the search.

3. Click on each row to see the Info panel. Verify whether the selected telemetry type will monitor the counters you need.
4. If the telemetry type is found, you are ready to set up your subscriptions.

For our example, the telemetry type we need is not installed yet. Next, we'll check the telemetry yang files. After the telemetry yang files have been installed, we can also install cut-through telemetry files.

---

4

Perform the sequence in [Step 1](#) to obtain the telemetry yang files for the NE family.

For this example, we'll download `nsp-telemetry-yang-sros-23_11.zip`.

---

5

Extract the files from the zip and look for the telemetry types:

1. View the list of telemetry files. The filename `sros-service-vprn-telemetry.yang` suggests it could contain the telemetry types we need.
2. Open the file and search for "aggregate". The desired counter is present in a leaf element. The telemetry type appears in the list:

```
leaf aggregate-dropped-packets{
tel-ext:coll-format "intervalized";
  type uint64 {
    range "0..max";
  } //type uint64
} //leaf aggregate-dropped-packets
leaf aggregate-dropped-octets{
tel-ext:coll-format "intervalized";
  type uint64 {
    range "0..max";
  } //type uint64
} //leaf aggregate-dropped-octets
leaf last-cleared-time{
  type string;
} //leaf last-cleared-time
container db-info {
  leaf index-1 {
    type string;
tel-ext:unique-index "true";
    default "time-captured system-id object-id";
  }
  leaf partition-key {
    type string;
    default "time-captured";
  }
  leaf partition-interval {
    type string;
    default "hourly";
  }
  leaf order-by {
    type string;
    default "system-id";
  }
  leaf segmented-by {
    type string;
    default "system-id";
  }
  leaf segmentation {
    type boolean;
    default "true";
  }
} //container db-info
} //list service_vprn_interface_sap_egress_qos_sap-egress_traffic-manager_statistics
```

3. Install the yang file using `yang-file .bash`; see "How do I manage MDM model definitions?" in the *NSP System Administrator Guide*.

---

6

Now that the yang file we need has been installed, we can install cut-through CRs.

Obtain the SR OS cut-through (ct) CR bundles from the Nokia [Nokia NSP software download site](#) and install them from the **Artifacts, Artifact Bundles** view; see “How do I install an artifact bundle?” in the *NSP Network Automation Guide*.



**Note:** Cut-through telemetry types are for gNMI-capable devices only.

---

7

Check the Telemetry Statistic Search Tool :

1. Open the NSP Help Center. From the Help Center home screen, navigate to **REFERENCE, Statistic Search, Telemetry Statistic Search**.
2. Enter “aggregate-dropped-packets” in the Counter Name field to verify that the artifacts have loaded successfully.
3. Click on each row to see the Info panel and obtain further details about the counter, such as device types and releases supported.

---

END OF STEPS

### We're done

The counters we need are available in the NSP, and we have the information we need to configure a subscription.

## 6.2 Setting up statistics and aggregation for Port Throughput on the 7750 SR

### 6.2.1 Purpose

This use case shows how to use NSP to set up the data collection and aggregation required to run a Port Throughput report in Analytics for 7750 SR NEs managed using MDM.

The following prerequisites must be completed.


- Telemetry types for port throughput have been installed.
- At least one 7750 SR NE has been discovered in the network and is reachable.
- Aggregation rules have been deployed.

### 6.2.2 Steps


---

1

From **Data Collection and Analysis Management, Subscriptions**, we'll create a subscription.

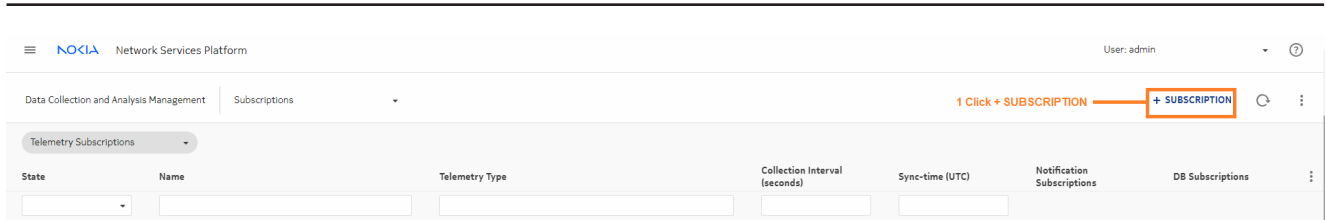

We need interface utilization statistics for 7750 SR NEs. An object filter that contains “7750” ensures that we receive data whether the NE type says “7750 SR” or “7750 SR-12”.

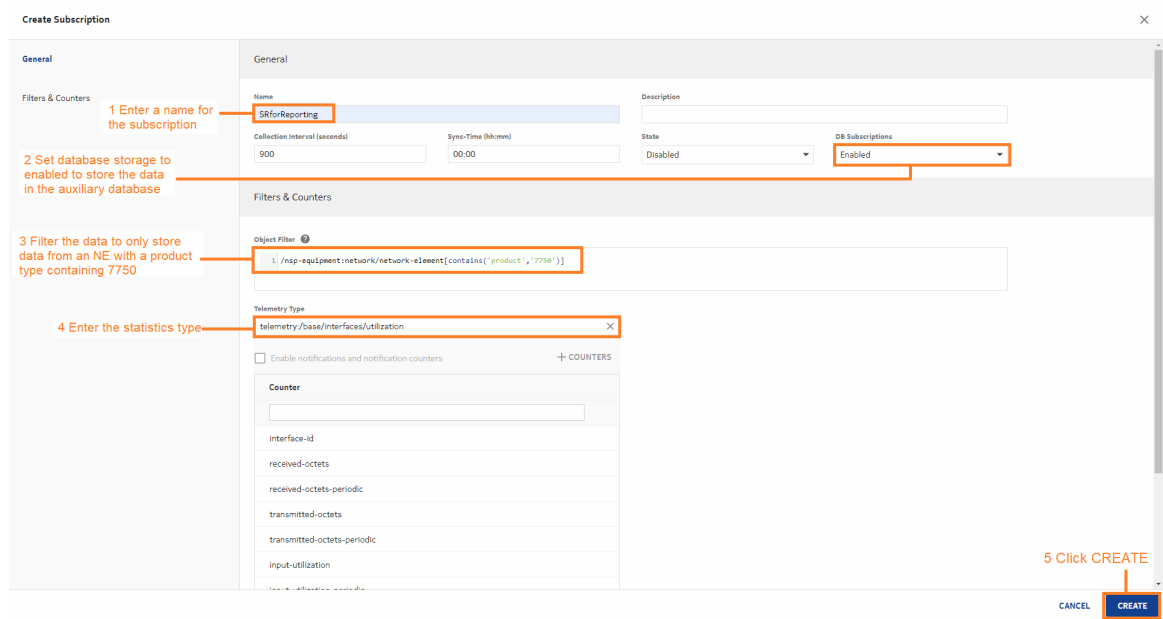

2

Let’s look at the aggregation rule for interface data. From the Aggregation view, choose the aggregation rule and click **Edit Aggregation Rule** to see the details.

The **Retention Period** fields show how long aggregated data is stored in the auxiliary database. The default retention period for daily aggregation is 90 days. That means that daily granularity is available in Analytics for up to 90 days of data.


The screenshot shows the Nokia Network Services Platform interface. A table lists various aggregation rules. An 'Edit Aggregation Rule' dialog box is open, showing the configuration for a rule named 'md-aggr/md-aggr-base/telemetry-interfaces/interface'. The dialog has the following fields:

Enable Aggregation	Retention Period	Last Success Time
<input checked="" type="checkbox"/> Hourly	30 days (1 - 403)	2023-11-17 05:00:00
<input checked="" type="checkbox"/> Daily	90 days (1 - 403)	2023-11-16 19:00:00
<input checked="" type="checkbox"/> Weekly	26 weeks (1 - 52)	2023-11-12 19:00:00
<input checked="" type="checkbox"/> Monthly	24 months (1 - 36)	

Buttons for 'CANCEL' and 'UPDATE' are visible at the bottom right of the dialog. The background table shows columns for Name, Type, Hourly Enabled - Last Success, Daily Enabled - Last Success, Weekly Enabled - Last Success, and Monthly Enabled - Last Success.

3

Changing the retention period to 120 days makes daily granularity available for a longer time. Change the retention time and click **UPDATE**.

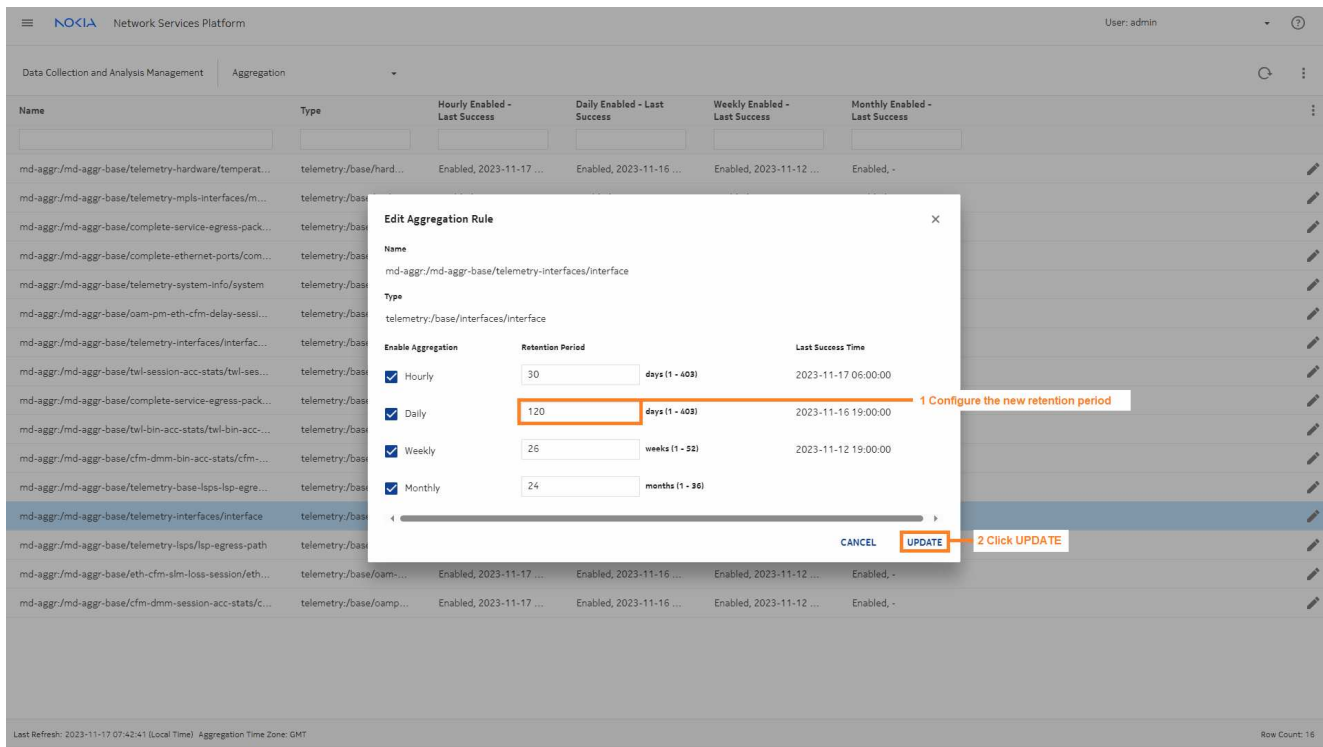

## END OF STEPS

### We're done

We've set up a subscription for interface utilization data, and aggregation is deployed. When data has been successfully collected and aggregated, we'll be able to run a Port Throughput Summary (NSP) report in the Analytics application.

## 6.3 Setting up baselines

### 6.3.1 Purpose

This use case shows how to use NSP to create baselines to monitor transmitted and received octets on a network port. These baselines can be used to detect anomalies and to create baseline and anomaly charts.


The following prerequisites must be completed.

- The NE we need to monitor has been discovered in the network and is reachable.
- If the NE we need to monitor is managed by NFM-P, statistics collection has been configured and started in the NFM-P.


## 6.3.2 Steps

1

From **Data Collection and Analysis Management, Baselines**, we'll create baselines.

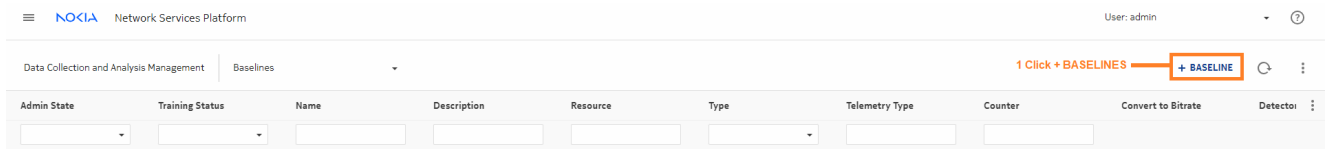


Creating an object filter to specify the NE and port makes finding the resources easier.

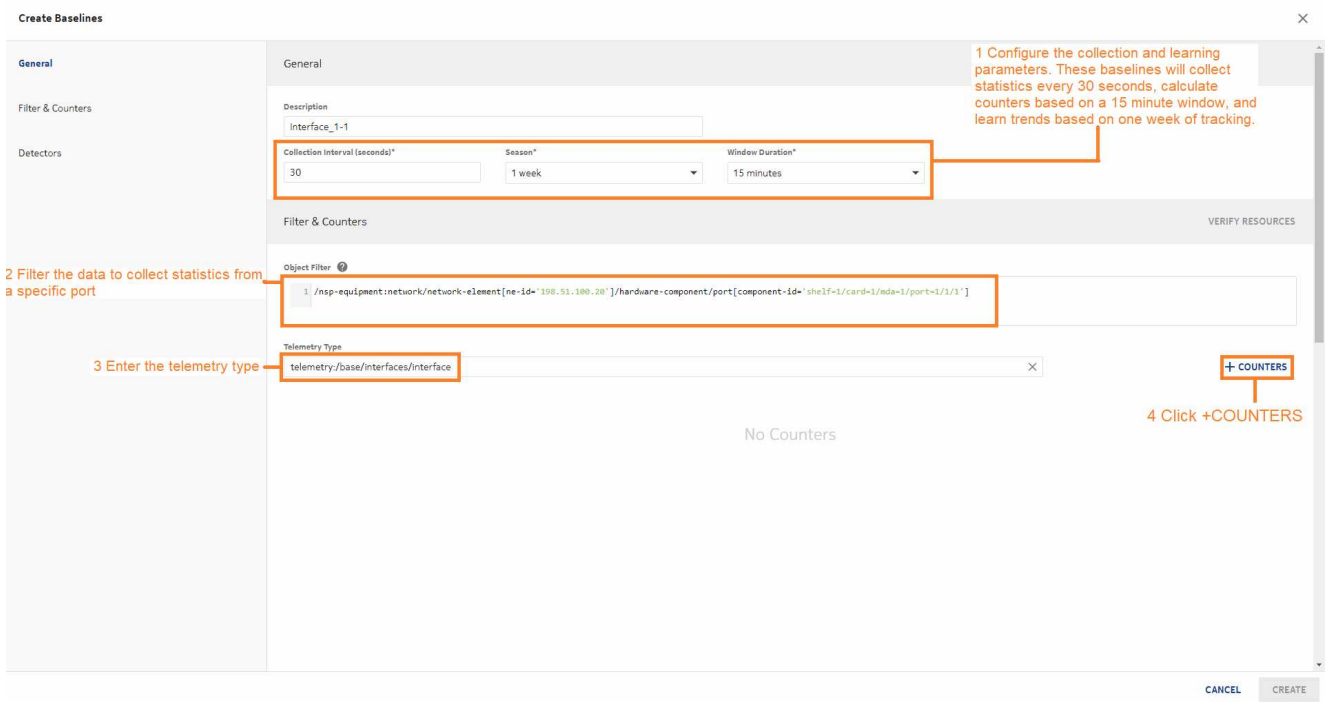

2


A form opens, showing the available counters. We'll choose transmitted and received octets. Select the counters and click **ADD**.



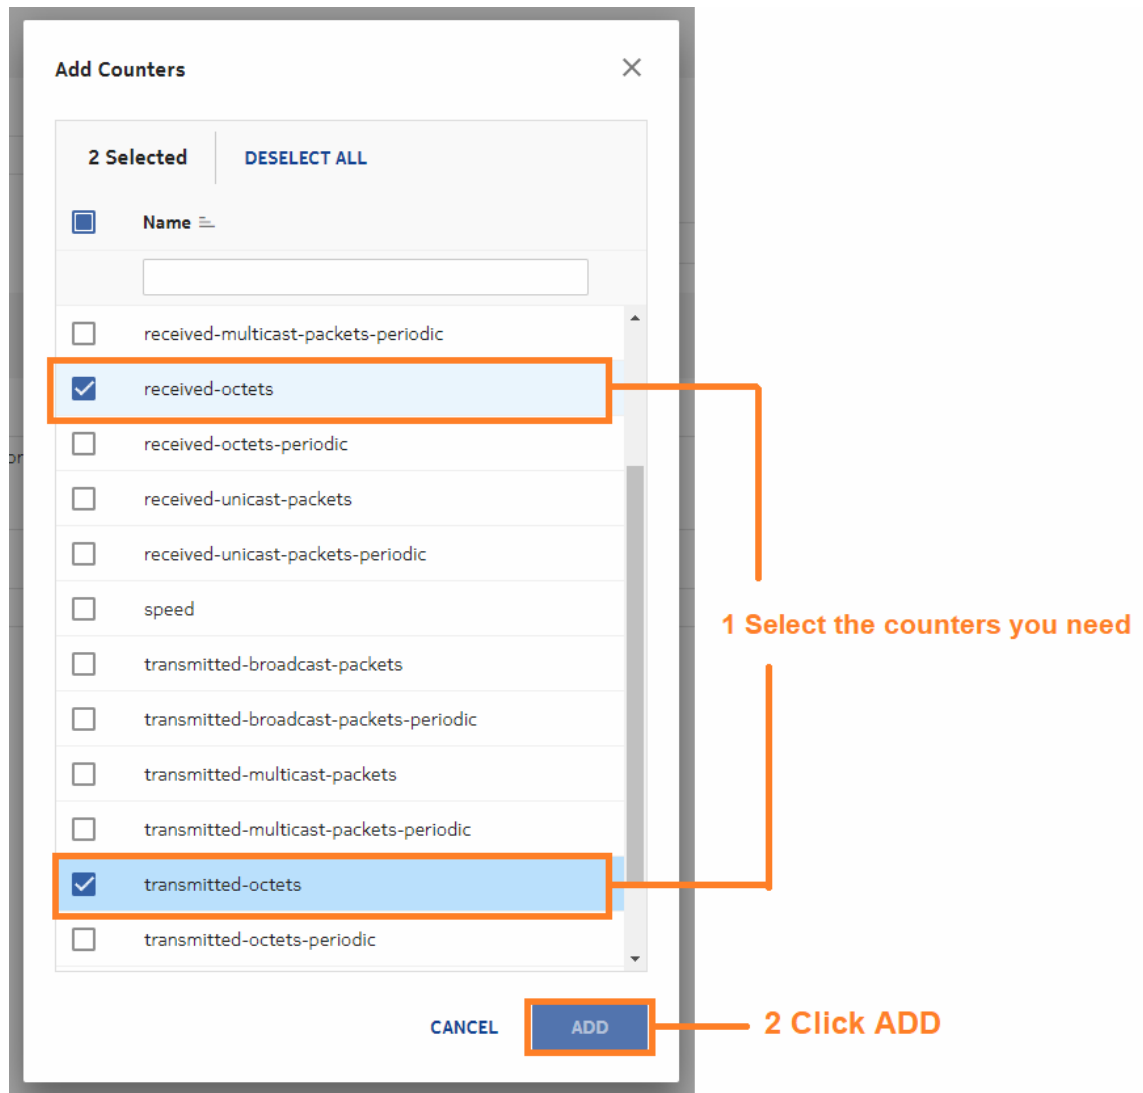


3

We can configure the counter type or conversion to bitrate if needed. We'll use the defaults for these baselines.

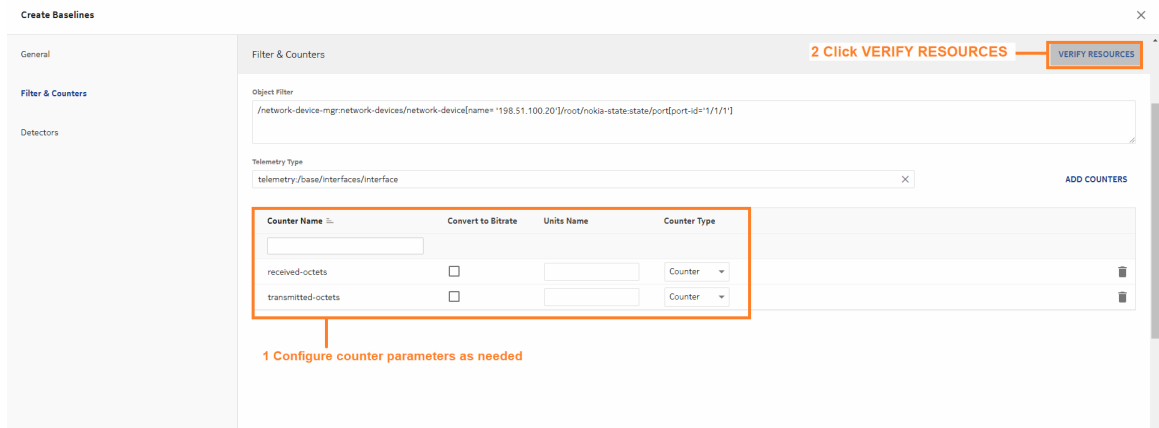


4

NSP checks for resources corresponding to the filters and counters specified. When the resources we need appear in the resources list, click **STOP VERIFICATION**. The verification does not stop on its own.

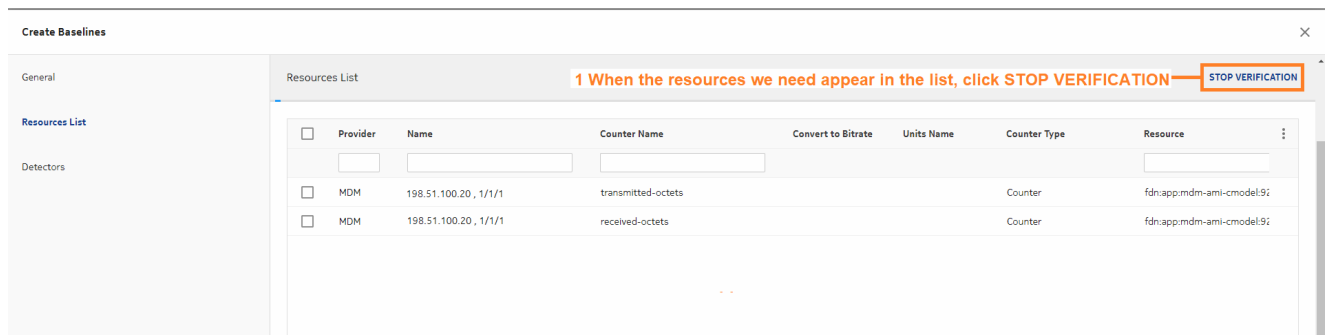


5

Select the resources in the resources list.

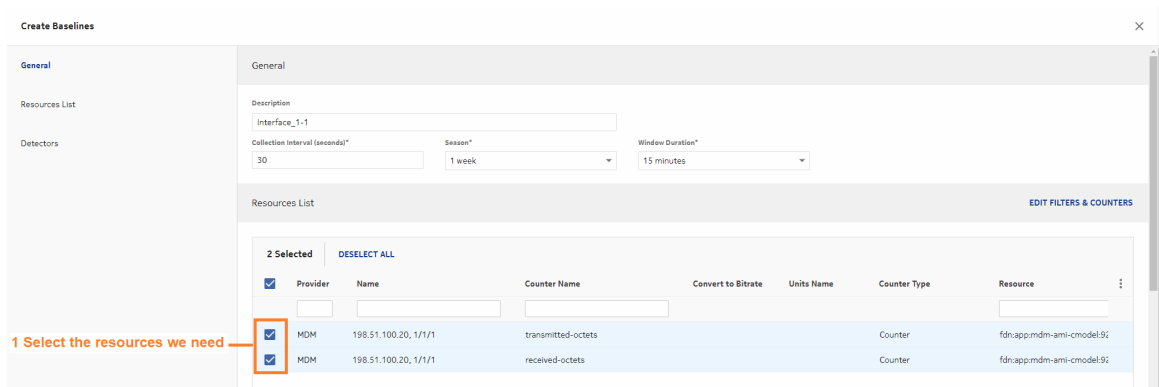

6

The final step is configuring anomaly detection. Then we can click **CREATE**.

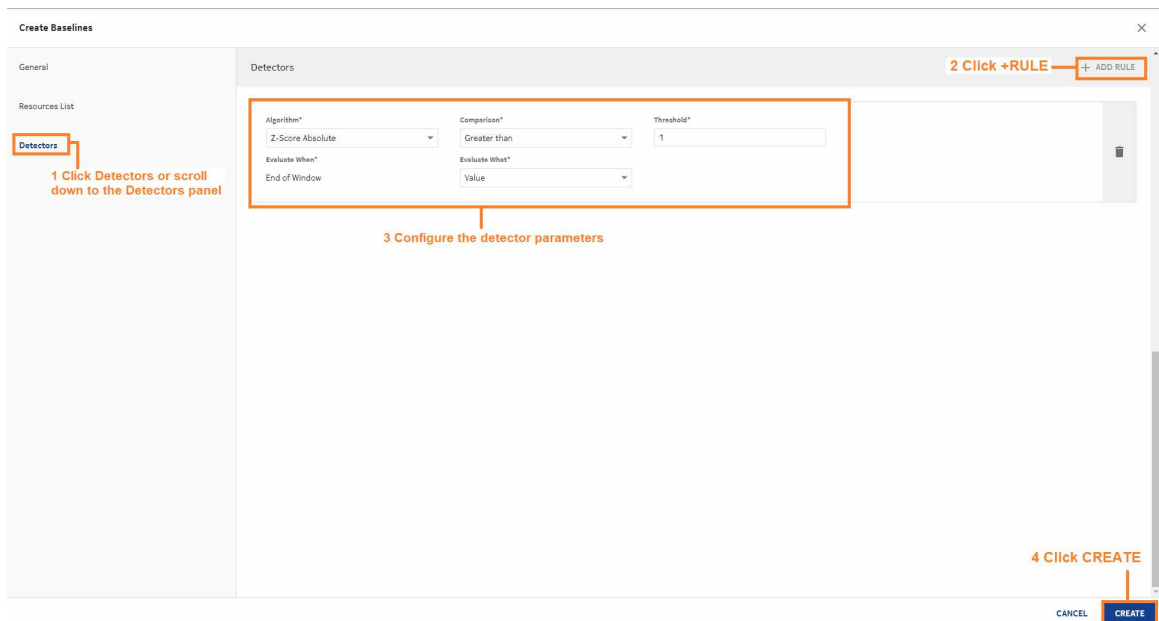

END OF STEPS

We're done

NSP creates a baseline for each resource. When complete, they appear in the list in **Data Collection and Analysis Management, Baselines**.

Admin State	Training Status	Name	Description	Resource	Type	Counter Group	Counter	Convert to Bitrate	Detector
Enabled	Active	198.51.100.20, 1/1/1	interface_1-1	fdn:app:mdm-ami-cm...	Counter	telemetry:/base/interf...	received-octets		✓
Enabled	Active	198.51.100.20, 1/1/1	interface_1-1	fdn:app:mdm-ami-cm...	Counter	telemetry:/base/interf...	transmitted-octets		✓

## 6.4 Creating a simple indicator

### 6.4.1 Purpose

This use case shows how to use NSP to create an indicator with a single counter and no formula. This indicator outputs the input utilization of each port on NE 4.4.4.4.

The following prerequisites must be completed:

- The NE we need to monitor has been discovered in the network and is reachable.
- If the NE we need to monitor is managed by NFM-P, statistics collection has been configured and started in the NFM-P.

### 6.4.2 Steps

1

From **Data Collection and Analysis Management, Indicators**, we'll create an indicator.

Admin State	Name	Description	Telemetry Type	Counters	Units	Thresholds	Actions	Multiple Output	Collectio (seconds)

Enter a name for the indicator, and configure the collection interval and window duration.

**1** Configure the name and collection parameters. This indicator will collect statistics every 900 seconds (15 minutes). The window duration is ignored for simple indicators.

**2** \_\_\_\_\_  
Configure the telemetry type.


**1** Enter the units to display the values

**2** Enter the telemetry type

**3** Click +COUNTERS

**3**

A form opens showing the available counters. We'll choose input utilization.

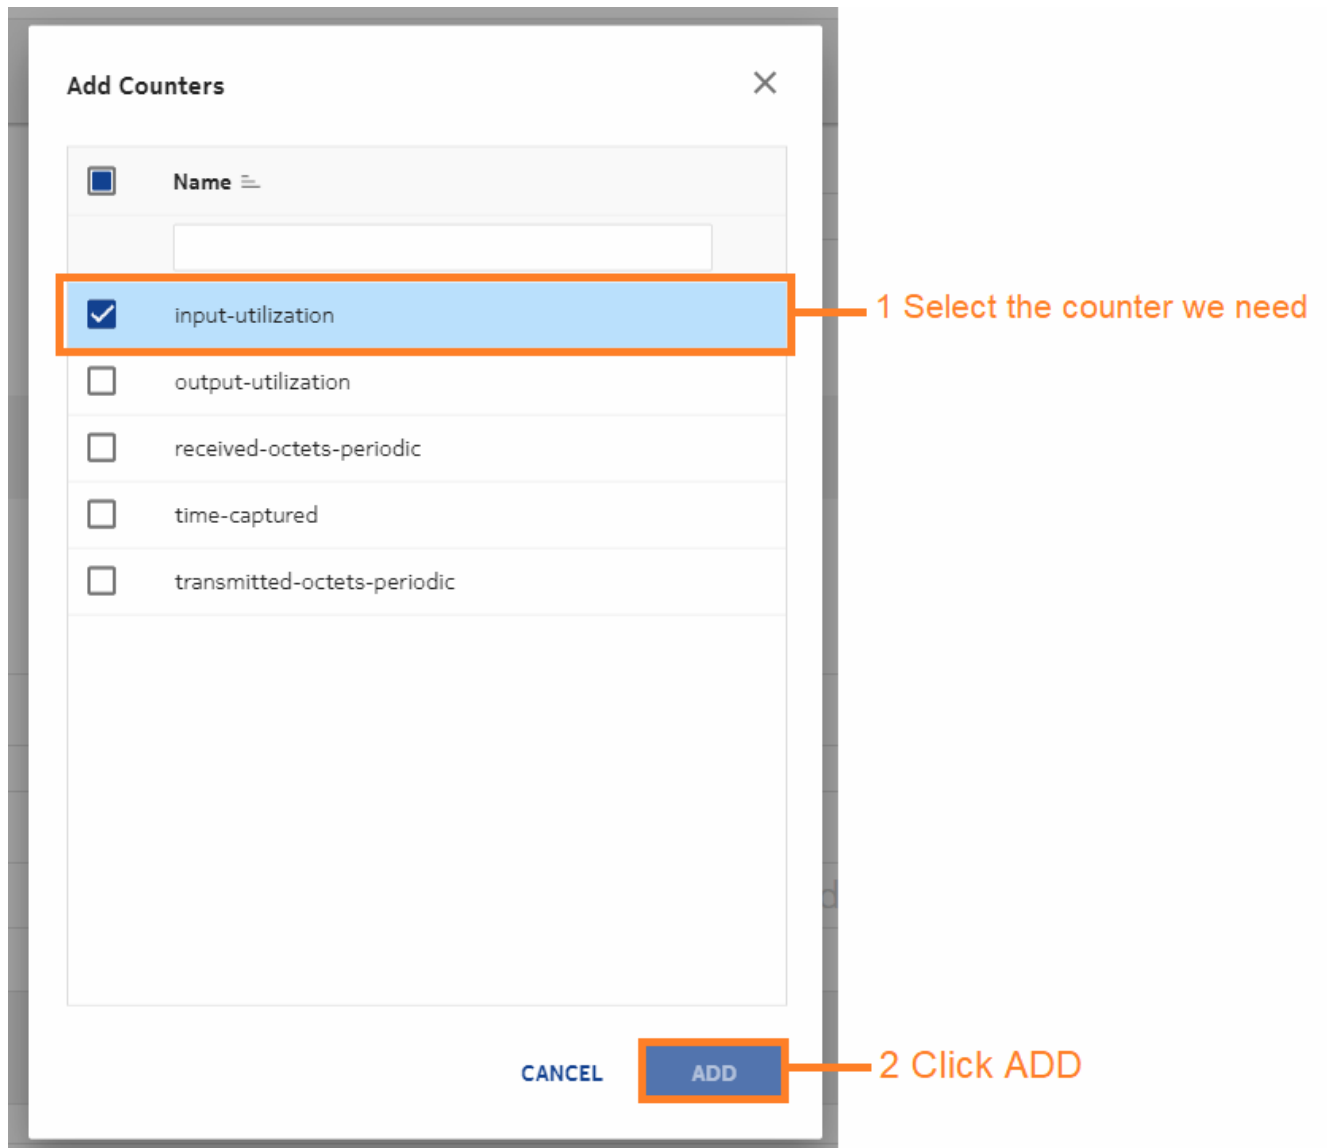

4

Configure an object filter to collect statistics from a specific port, and click **VERIFY RESOURCES** to make sure the filter is correct.

1 Filter the data to collect data from a specific port

2 Click VERIFY RESOURCES


5

When the resources we need appear in the resources list, click **STOP VERIFICATION**. The verification does not stop on its own.

6


Create thresholds as needed. We'll create thresholds for utilization increasing past 60% and for decreasing below 5%.



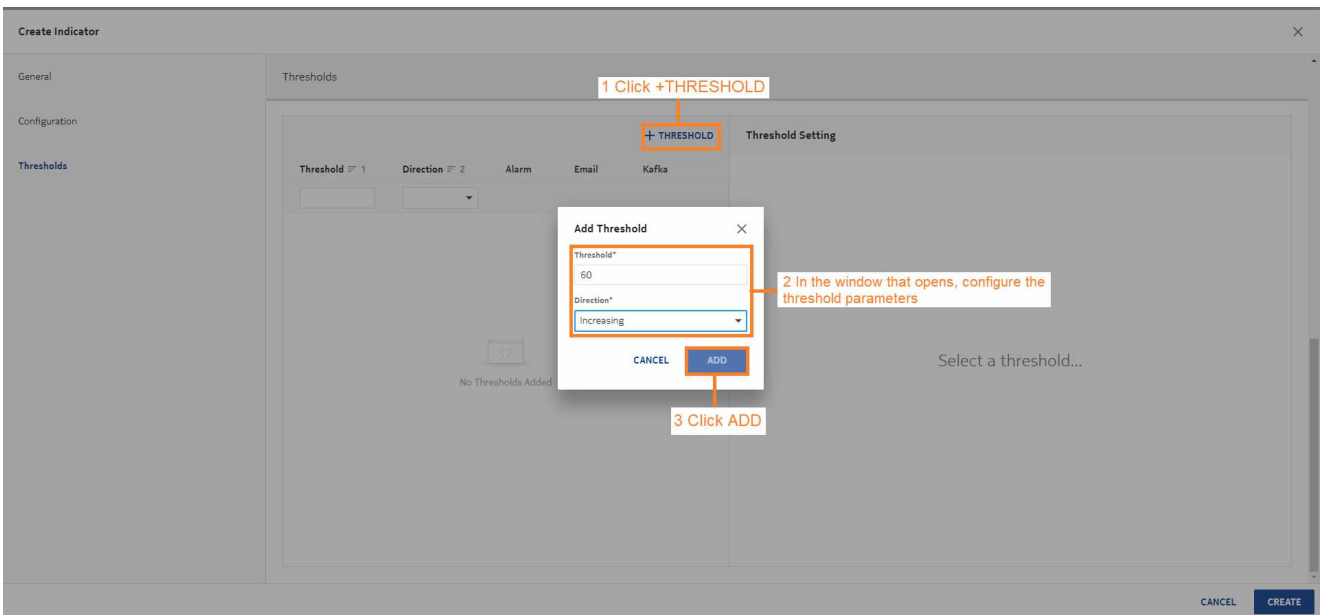


7

Configure threshold actions. We'll configure a Threshold Crossing Alarm alarm to be generated for each threshold. The alarm for the increasing threshold has Major severity, and the alarm for the decreasing threshold has Minor severity.

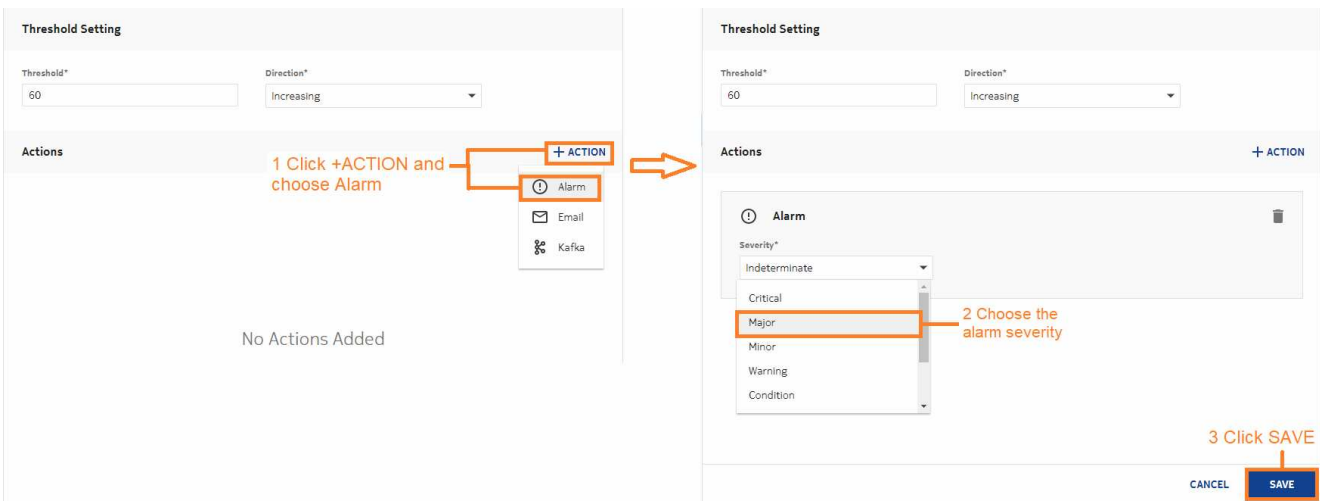

8


When both thresholds are configured, we can click **CREATE** to create the indicator.

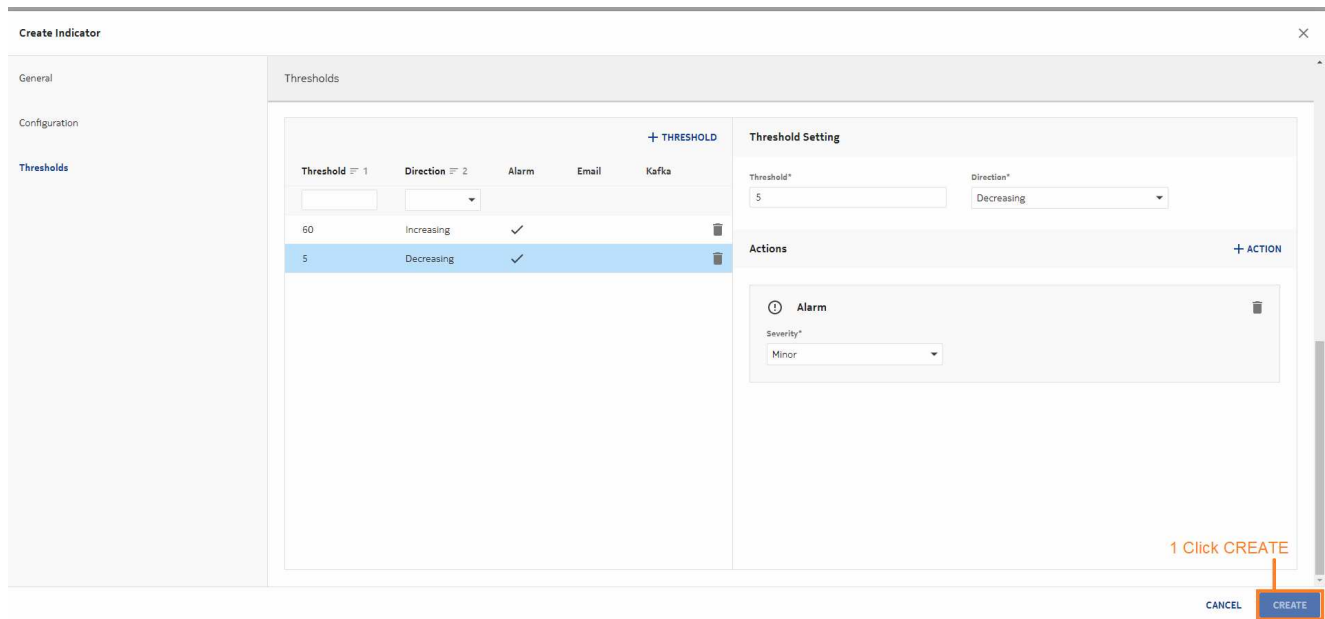

**END OF STEPS**

**We're done**

The indicator appears in the list in **Data Collection and Analysis Management, Indicators**.

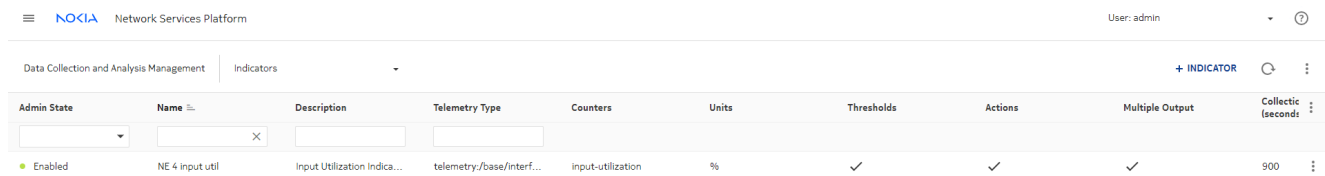

## 6.5 Creating a complex indicator using a template



### 6.5.1 Purpose

This use case shows how to use NSP to create an indicator template with a formula and apply the template to an indicator.

## 6.5.2 Steps


1

From **Data Collection and Analysis Management, Indicator Templates**, we'll create a template.

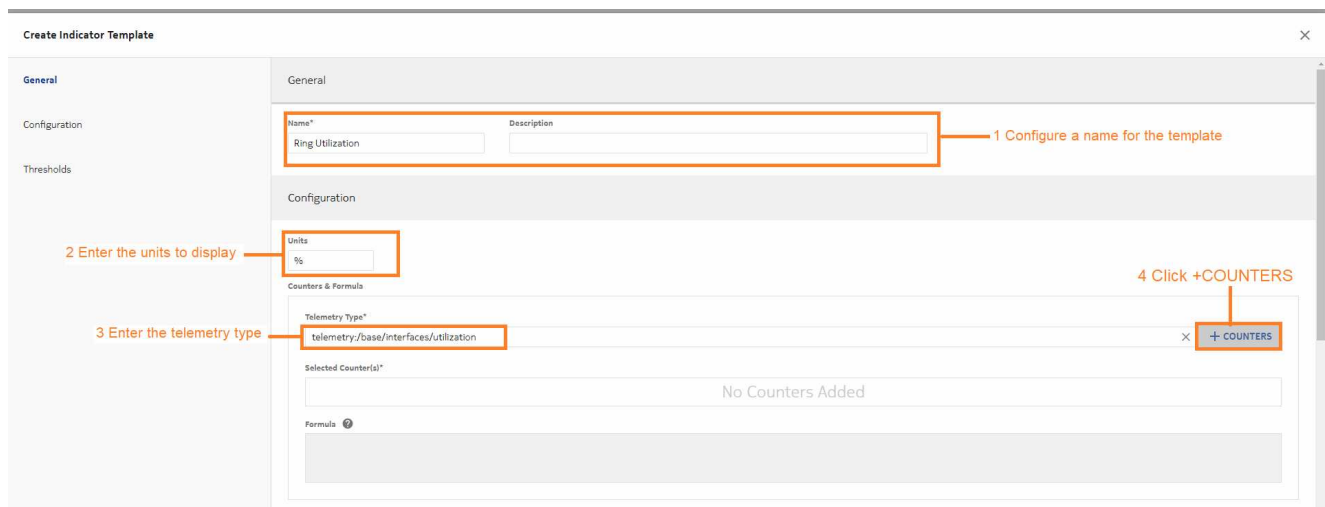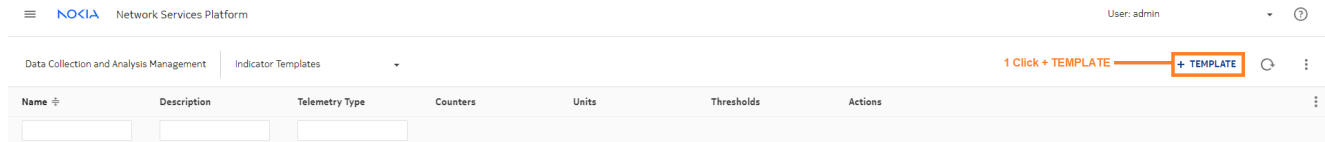

2

A form opens showing the available counters. We'll choose input utilization.

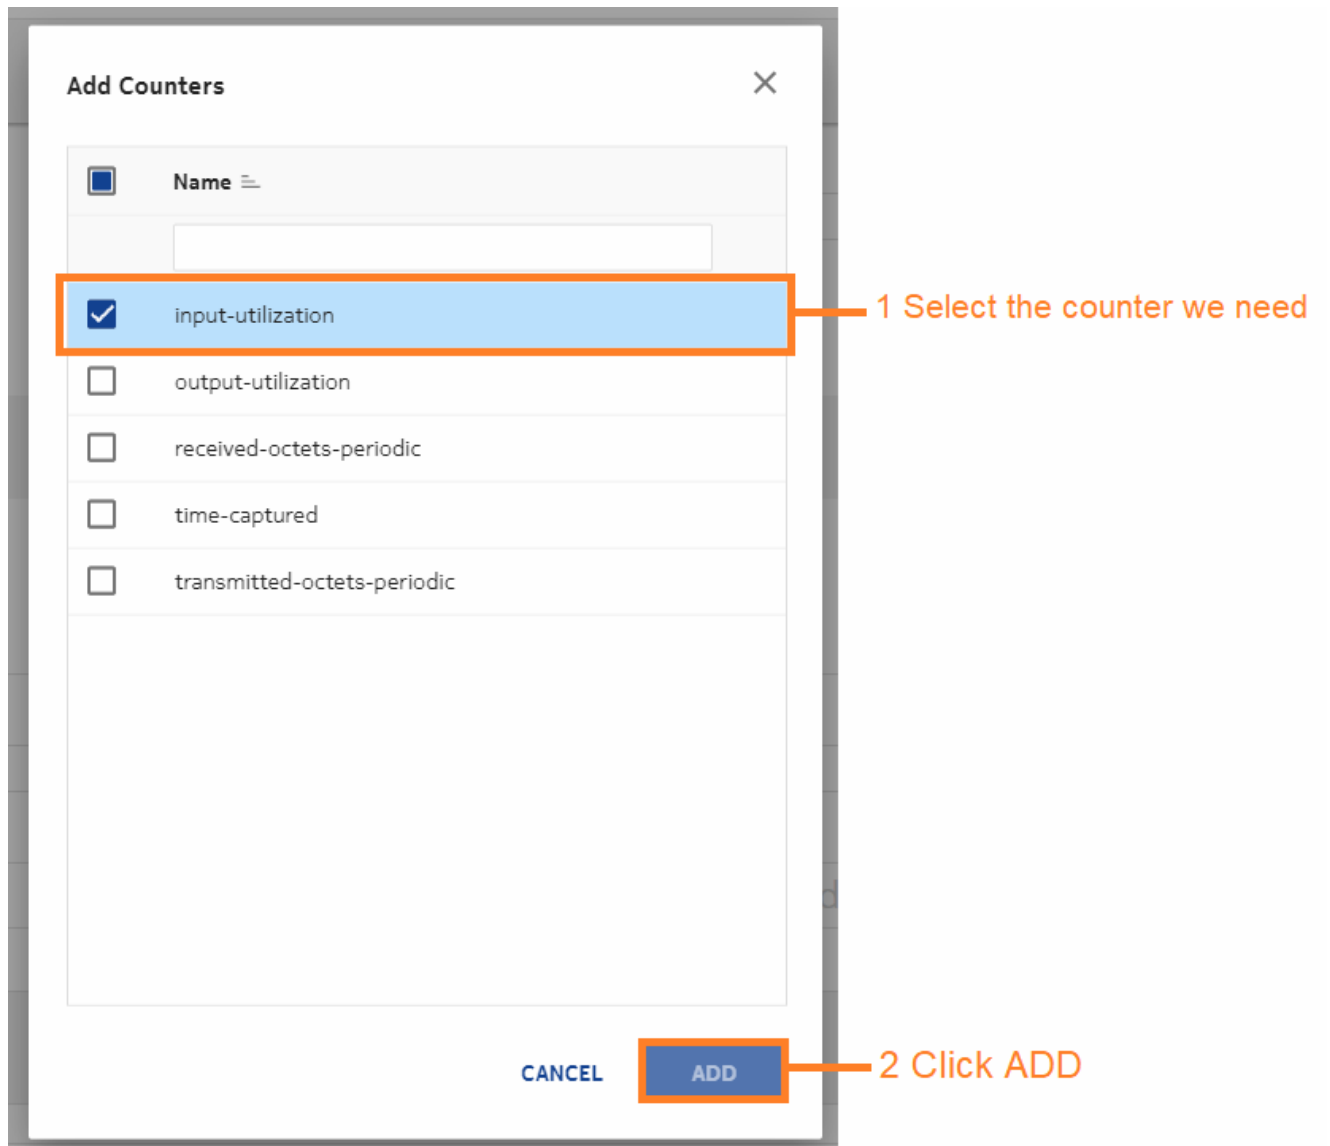

- 3 Enter a formula for the indicator to use to calculate KPI values. Our formula calculates average input utilization.  
Click **CREATE** to create the template.


4

Now we can create the indicator. From the Indicators view, click **+ INDICATOR**. Enter a name for the indicator and configure the collection settings.

Click **APPLY TEMPLATE**.

5

In the window that opens, choose the template and click **APPLY**.

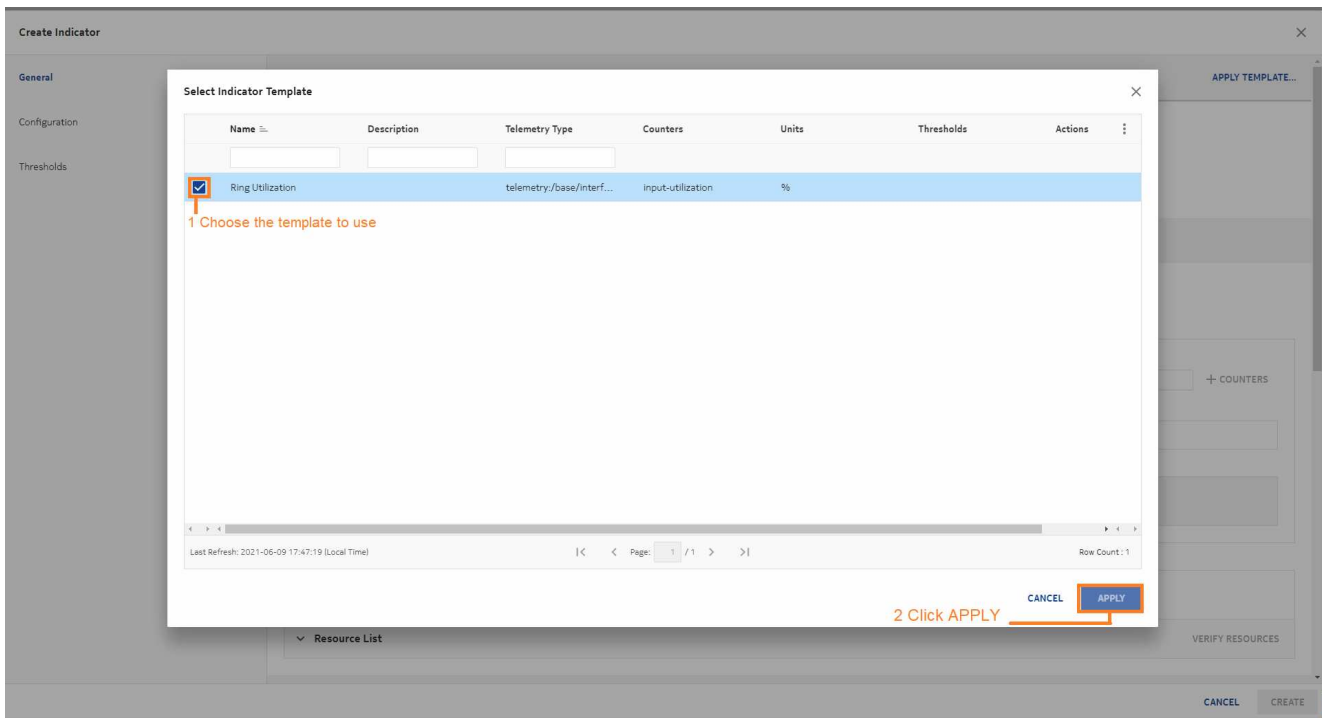

The template has provided most of the parameters for the indicator, including defining how we want to calculate ring utilization. Next we can apply an object filter to define the resources to monitor.

## 6

Click **VERIFY RESOURCES** to show the resources found by the filter and ensure that they are returning values.

7

When the resources of interest appear in the resources list, click **STOP VERIFICATION**. The verification does not stop on its own.

Provider	Name	input-utilization	Resource
NFM-P	(198.51.100.0), Port 1/2/3	0	/network-device-mgr:network-devices/network-device[name='198.51.100.0']/root/nokia-nsp-source:fdn[id='fdn:realms...
NFM-P	(198.51.100.0), Port 1/2/7	0	/network-device-mgr:network-devices/network-device[name='198.51.100.0']/root/nokia-nsp-source:fdn[id='fdn:realms...
NFM-P	(198.51.100.0), Port 1/2/8	0	/network-device-mgr:network-devices/network-device[name='198.51.100.0']/root/nokia-nsp-source:fdn[id='fdn:realms...
NFM-P	(192.0.2.255), Port 1/2/1	0	/network-device-mgr:network-devices/network-device[name='192.0.2.255']/root/nokia-nsp-source:fdn[id='fdn:realms...
NFM-P	(192.0.2.255), Port 1/2/9	0	/network-device-mgr:network-devices/network-device[name='192.0.2.255']/root/nokia-nsp-source:fdn[id='fdn:realms...
NFM-P	(192.0.2.255), Port 1/2/13	0	/network-device-mgr:network-devices/network-device[name='192.0.2.255']/root/nokia-nsp-source:fdn[id='fdn:realms...



---

8

Add thresholds if needed and click **CREATE**. See 6.4 “Creating a simple indicator” (p. 92) for steps to create a threshold.

---

**END OF STEPS**

**We’re done**

The indicator appears in the list in **Data Collection and Analysis Management, Indicators**.

Network Services Platform User: admin

Data Collection and Analysis Management Indicators + INDICATOR

Admin State	Name	Description	Telemetry Type	Counters	Units	Thresholds	Actions	Multiple Output	Collectio (secondr
Enabled	Ring Ingress Util	avg input util on Ingres...	telemetry/base/interf...	input-utilization	%	✓	✓		60



## 7 Chart use cases

### 7.1 Creating baseline and anomaly charts

#### 7.1.1 Purpose

This use case shows how to use NSP to chart baselines and anomalies.


The following prerequisites must be completed:

- The required baselines have been created.
- The baselines have been in active learning status for enough time to detect anomalies.  
Depending on the anomaly detector, this can be one or two seasons.

#### 7.1.2 Steps


1

From **Data Collection and Analysis Visualizations, Baseline Charts**, we'll create a chart.

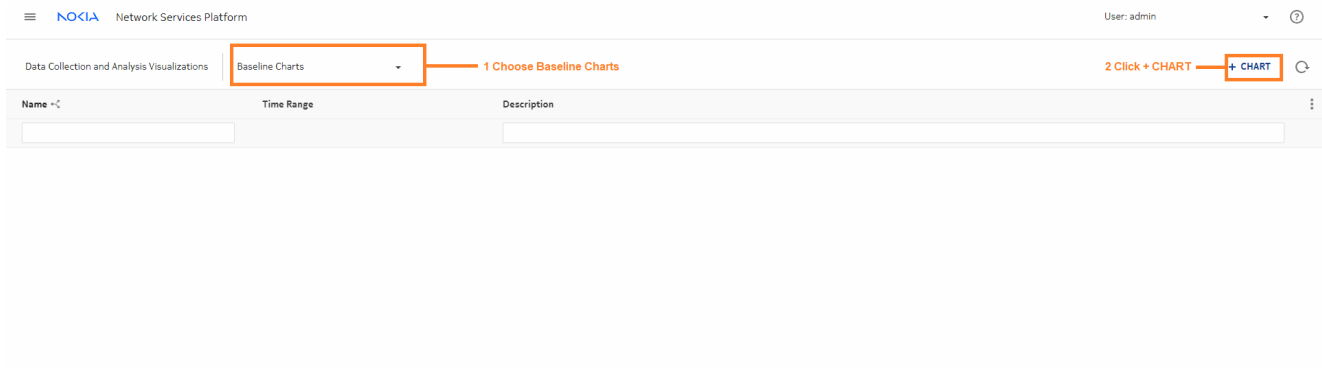


2

Configure the time range parameter. To display multiple baselines on the same chart, enable the **Combine Charts** check box.

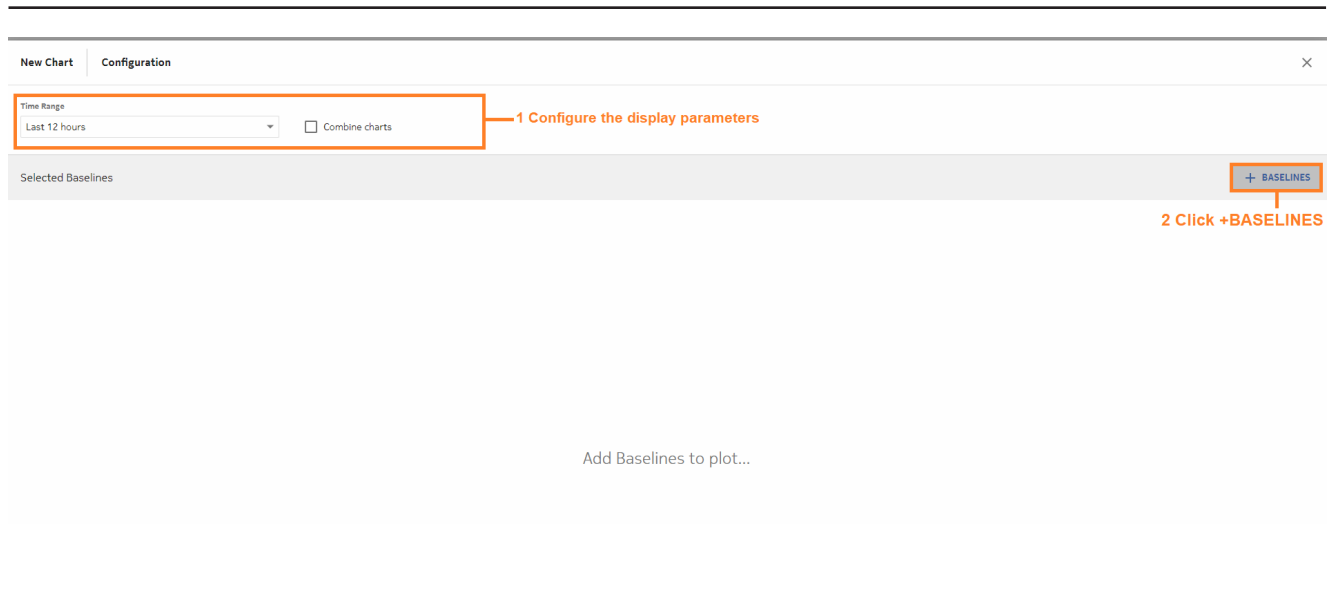

3

In the Add Baselines form, choose the baselines to chart and click **ADD**.

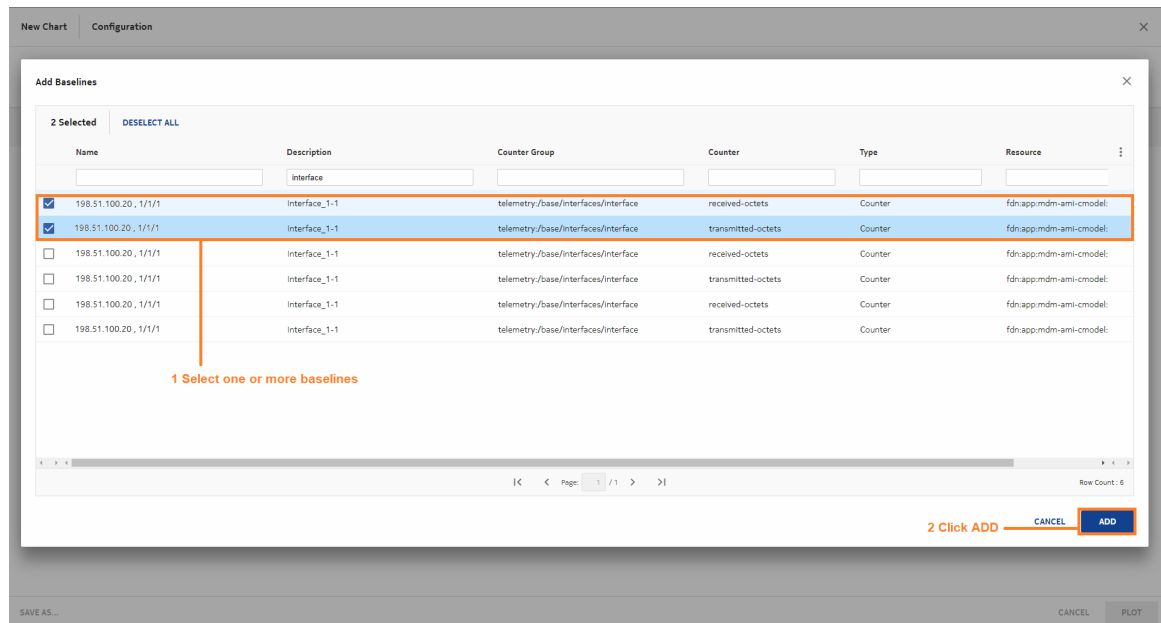

4

If you want to save the configuration for future use, click **SAVE AS** and enter a name for the chart.

Click **PLOT** to plot the chart.

New Chart Configuration
×

Time Range Last 12 hours  Combine charts

+ ADD BASELINES

Name	Description	Counter Group	Counter	Type	Resource
⋮ 198.51.100.20, 1/1/1	Interface_1-1	telemetry/base/interfaces/interface	transmitted-octets	Counter	fdn.app.mdm-ami-cmodel:92.168.96.20.equip...
⋮ 198.51.100.20, 1/1/1	Interface_1-1	telemetry/base/interfaces/interface	received-octets	Counter	fdn.app.mdm-ami-cmodel:92.168.96.20.equip...

1 Click on the handles to reorder baselines in the list if needed

2 To save the chart as a profile for future use, click SAVE AS and enter a name for the profile

SAVE AS...

3 Click Plot

CANCEL

PLOT


## END OF STEPS

### We're done


Visualizations displays a chart for each baseline.

The dotted line shows the expected values. The shading shows the detector threshold range, that is, the range of values that is not considered anomalous.

The solid line shows the actual values. Anomalies are indicated with red dots.

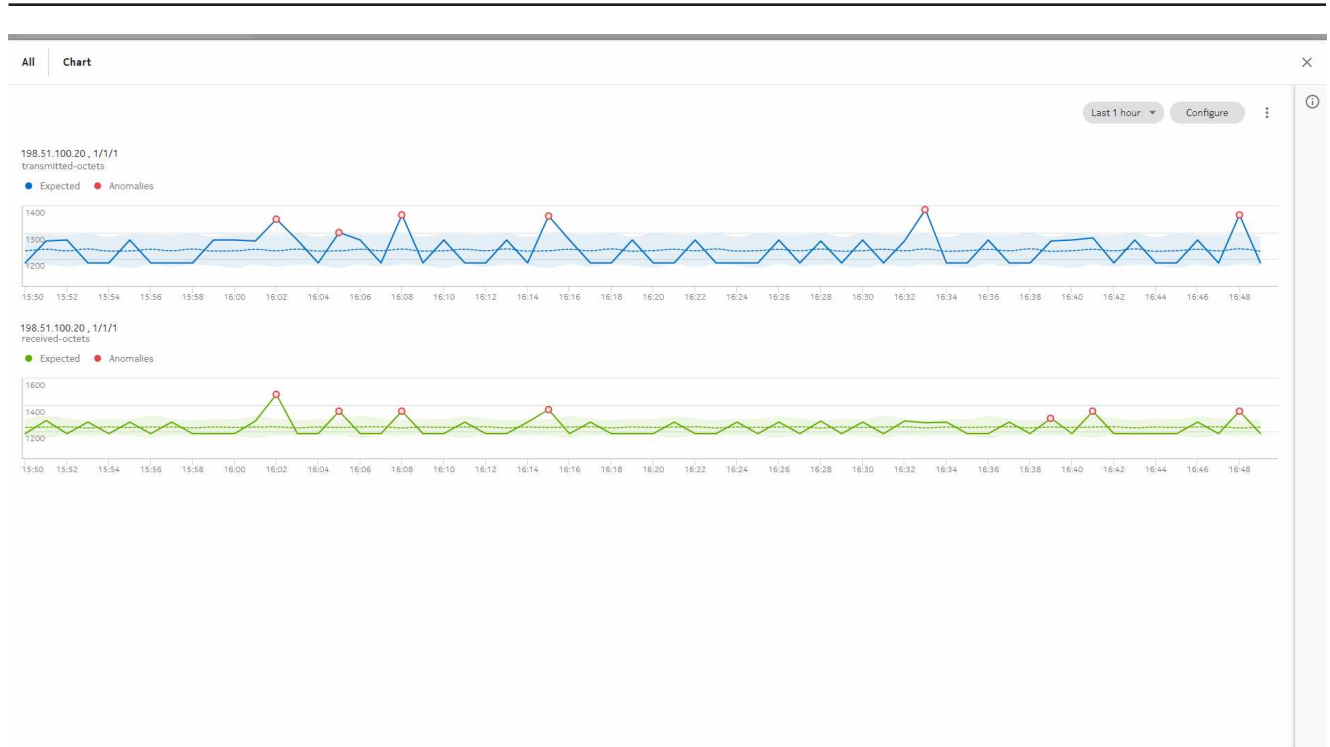

Click **Chart Details**  at the top right to display the Chart Details panel.

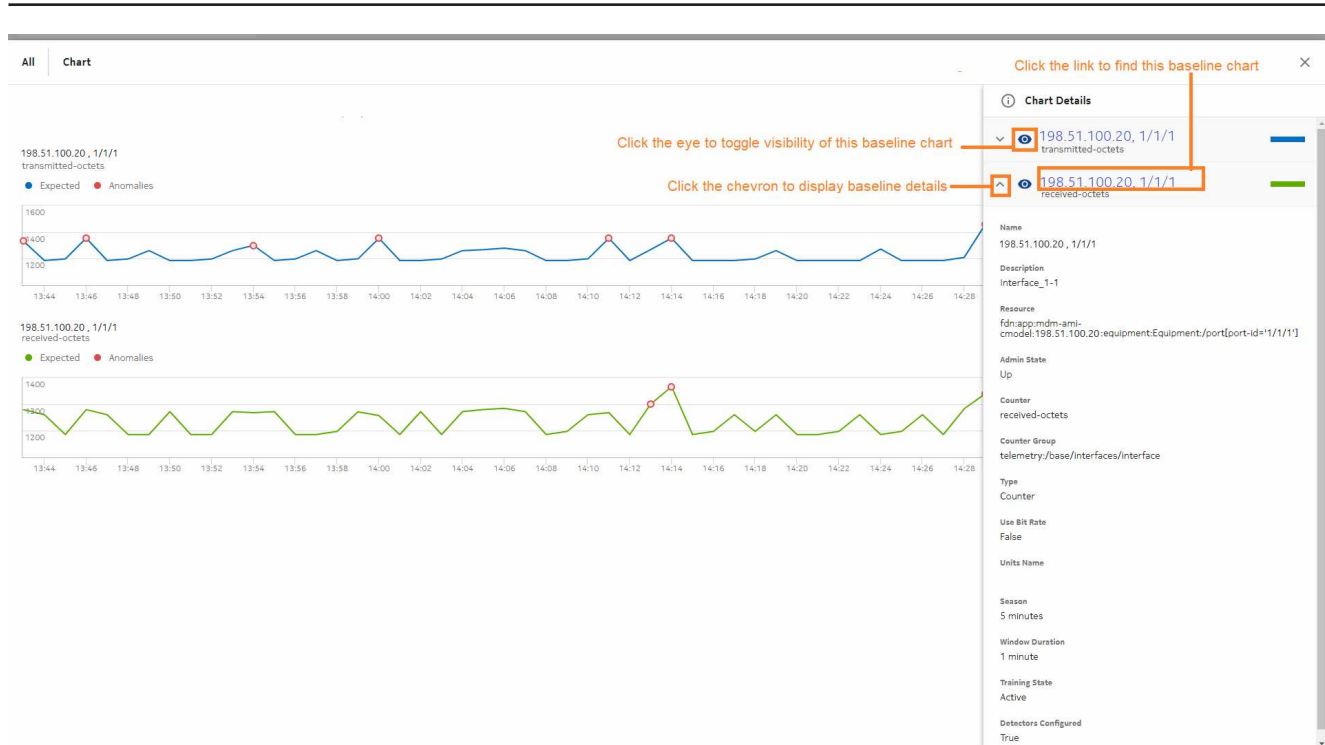

## 7.2 Creating an indicator chart

### 7.2.1 Purpose

This use case shows how to use NSP to chart an indicator.


The following prerequisites have been completed:

- The indicator we need has been created.
- The indicator has been operating for at least one window duration.

### 7.2.2 Steps

1


From **Data Collection and Analysis Management, Indicator Charts**, we'll create a chart.

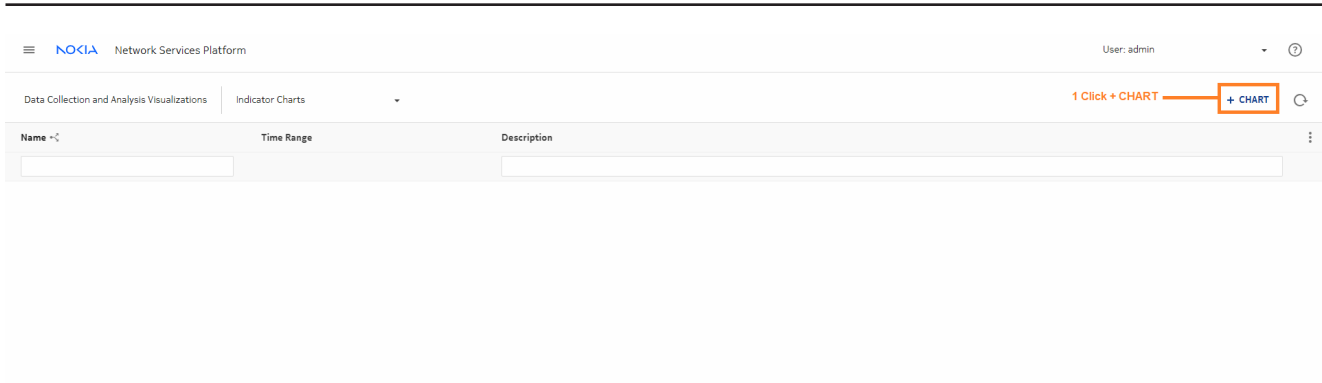

2

Configure the time range parameter. To display multiple indicators on the same chart, enable the **Combine Charts** check box.


Click **+ INDICATORS**.

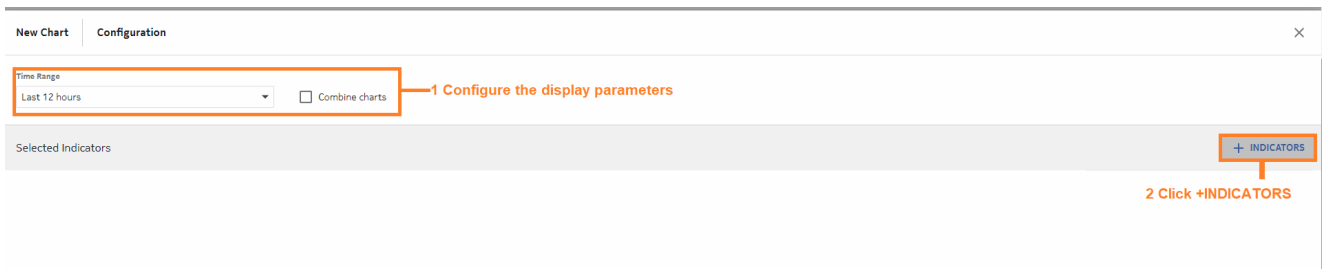

3

In the Add Indicators form, choose the indicators to chart and click **Add**. The indicator we want to add has a file icon in the Multiple column, so the resources are aggregated and there is no need to select resources. We can just choose the Ring Ingress Util indicator and click **Add**.



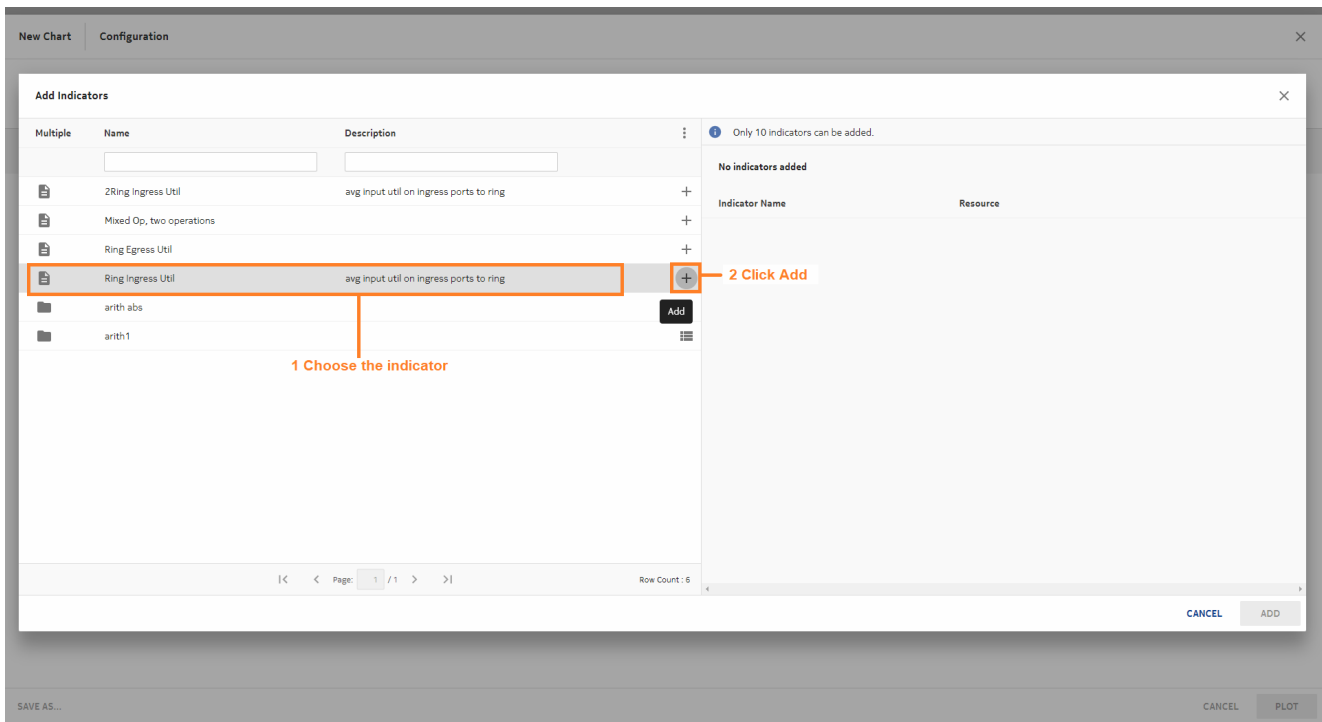

4

If you want to save the configuration for future use, click **SAVE AS** and enter a name for the chart.

Click **PLOT** to plot the chart.

New Chart Configuration

Time Range: Last 12 hours  Combine charts

Selected Indicators + INDICATORS

Indicator Name	Description	Resource
Ring Ingress Util	avg input util on ingress ports to ring	

2 To save the chart as a profile for future use, click **SAVE AS** and enter a name for the profile

1 When all the indicators are added click **PLOT**

SAVE AS... CANCEL PLOT

## END OF STEPS

## We're done

Visualizations displays a chart for the indicator.

The dotted lines shows the thresholds. Threshold crossing events are indicated with dots.

