



7210 Service Access System

Release 26.9.R1

7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C System Management Guide

3HE 27850 AAAB TQZZA 01
Edition: 01
September 2026

Nokia is committed to diversity and inclusion. We are continuously reviewing our customer documentation and consulting with standards bodies to ensure that terminology is inclusive and aligned with the industry. Our future customer documentation will be updated accordingly.

This document includes Nokia proprietary and confidential information, which may not be distributed or disclosed to any third parties without the prior written consent of Nokia.

This document is intended for use by Nokia's customers ("You"/"Your") in connection with a product purchased or licensed from any company within Nokia Group of Companies. Use this document as agreed. You agree to notify Nokia of any errors you may find in this document; however, should you elect to use this document for any purpose(s) for which it is not intended, You understand and warrant that any determinations You may make or actions You may take will be based upon Your independent judgment and analysis of the content of this document.

Nokia reserves the right to make changes to this document without notice. At all times, the controlling version is the one available on Nokia's site.

No part of this document may be modified.

NO WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF AVAILABILITY, ACCURACY, RELIABILITY, TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS MADE IN RELATION TO THE CONTENT OF THIS DOCUMENT. IN NO EVENT WILL NOKIA BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO SPECIAL, DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL OR ANY LOSSES, SUCH AS BUT NOT LIMITED TO LOSS OF PROFIT, REVENUE, BUSINESS INTERRUPTION, BUSINESS OPPORTUNITY OR DATA THAT MAY ARISE FROM THE USE OF THIS DOCUMENT OR THE INFORMATION IN IT, EVEN IN THE CASE OF ERRORS IN OR OMISSIONS FROM THIS DOCUMENT OR ITS CONTENT.

Copyright and trademark: Nokia is a registered trademark of Nokia Corporation. Other product names mentioned in this document may be trademarks of their respective owners.

© 2026 Nokia.

Table of contents

List of tables.....	13
List of figures.....	17
1 Getting started.....	18
1.1 About this guide.....	18
1.1.1 Document structure and content.....	19
1.2 7210 SAS modes of operation.....	19
1.3 7210 SAS port modes.....	21
1.4 7210 SAS system management configuration process.....	23
1.5 Conventions.....	24
1.5.1 Precautionary and information messages.....	24
1.5.2 Options or substeps in procedures and sequential workflows.....	25
2 Security.....	26
2.1 Authentication, authorization, and accounting.....	26
2.1.1 Authentication.....	27
2.1.1.1 Local authentication.....	28
2.1.1.2 RADIUS authentication.....	28
2.1.1.3 TACACS+ authentication.....	29
2.1.1.4 Password management.....	29
2.1.2 Authorization.....	30
2.1.2.1 Local authorization.....	31
2.1.2.2 RADIUS authorization.....	31
2.1.2.3 TACACS+ authorization.....	32
2.1.2.4 Authorization profiles for classic CLI.....	33
2.1.2.5 Configuring authorization.....	34
2.1.2.6 Configuration guidelines for authorization.....	34
2.1.3 Accounting.....	34
2.1.3.1 RADIUS accounting.....	35
2.1.3.2 TACACS+ accounting.....	35
2.1.3.3 Command accounting log events.....	35
2.1.4 Server health check monitoring.....	36
2.1.5 User access control method ordering.....	36

2.2	RADIUS VSAs.....	38
2.2.1	RADIUS configuration for file access control using VSAs.....	40
2.3	TACACS+ services and VSAs.....	42
2.3.1	TACACS+ configuration for file access control using VSAs.....	45
2.4	Control and management traffic protection.....	48
2.4.1	CPM management access filters.....	48
2.4.1.1	CPM protocols and ports.....	48
2.4.2	Management Access Filter.....	54
2.4.2.1	MAF packet match.....	54
2.4.2.2	MAF IPv4/IPv6 filter entry match criteria.....	55
2.4.2.3	MAF policy action.....	56
2.4.2.4	MAF policy statistics and logging.....	56
2.5	Centralized CPU protection.....	56
2.5.1	ETH-CFM ingress squelching.....	56
2.6	Other security features.....	58
2.6.1	Security algorithms.....	58
2.6.2	Secure Shell (SSH).....	59
2.6.2.1	SSH and Telnet ports.....	60
2.6.2.2	SSH PKI authentication.....	61
2.6.2.3	SSH MAC client and server list.....	62
2.6.2.4	SSH cipher client and server list.....	63
2.6.2.5	SSH KEX client and server list.....	64
2.6.2.6	SSH host key algorithm list.....	65
2.6.3	Exponential login back-off.....	66
2.6.4	User lockout.....	67
2.6.5	Encryption.....	67
2.6.6	802.1x network access control.....	67
2.6.7	TCP Enhanced Authentication Option.....	67
2.6.7.1	Packet formats.....	68
2.6.7.2	Keychain.....	69
2.7	Configuration notes.....	70
2.7.1	General.....	70
2.8	Configuring security with CLI.....	70
2.8.1	Setting up security attributes.....	70
2.8.1.1	Configuring authentication.....	71
2.8.1.2	Configuring authorization.....	71

2.8.1.3	Configuring accounting.....	72
2.8.2	Security configurations.....	72
2.8.3	Security configuration procedures.....	74
2.8.3.1	Configuring Management Access Filters.....	74
2.8.3.2	Configuring password management parameters.....	74
2.8.3.3	Configuring profiles.....	75
2.8.3.4	Configuring users.....	76
2.8.3.5	Configuring keychains.....	77
2.8.3.6	Copying and overwriting users and profiles.....	77
2.8.3.7	Enabling SSH.....	80
2.8.4	RADIUS configurations.....	81
2.8.4.1	Configuring RADIUS authentication.....	81
2.8.4.2	Configuring RADIUS authorization.....	82
2.8.4.3	Configuring RADIUS accounting.....	82
2.8.4.4	Configuring 802.1x RADIUS policies.....	83
2.8.5	TACACS+ configurations.....	83
2.8.5.1	Enabling TACACS+ authentication.....	83
2.8.5.2	Configuring TACACS+ authorization.....	84
2.8.5.3	Configuring TACACS+ accounting.....	84
2.8.6	Configuring login controls.....	85
2.9	Security command reference.....	85
2.9.1	Command hierarchies.....	85
2.9.1.1	Configuration commands.....	86
2.9.1.2	Show commands.....	93
2.9.1.3	Clear commands.....	93
2.9.1.4	Debug commands.....	93
2.9.2	Command descriptions.....	94
2.9.2.1	Configuration commands.....	94
2.9.2.2	Show commands.....	194
2.9.2.3	Debug commands.....	217
3	SNMP.....	222
3.1	SNMP overview.....	222
3.1.1	SNMP architecture.....	222
3.1.2	Management information base.....	222
3.1.3	SNMP protocol operations.....	223

3.1.4	SNMP versions.....	223
3.1.5	Management information access control.....	223
3.1.6	User-based security model community strings.....	224
3.1.7	Views.....	224
3.1.8	Access groups.....	224
3.1.9	Users.....	224
3.2	Which SNMP version to use?.....	225
3.3	Configuration notes.....	225
3.3.1	General.....	226
3.4	Configuring SNMP with CLI.....	226
3.4.1	SNMP configuration overview.....	226
3.4.1.1	Configuring SNMPv1 and SNMPv2c.....	226
3.4.1.2	Configuring SNMPv3.....	227
3.4.2	Basic SNMP security configuration.....	227
3.4.3	Configuring SNMP components.....	228
3.4.3.1	Configuring a community string.....	228
3.4.3.2	Configuring view options.....	229
3.4.3.3	Configuring access options.....	229
3.4.3.4	Configuring USM community options.....	230
3.4.3.5	Configuring other SNMP parameters.....	231
3.5	SNMP command reference.....	231
3.5.1	Command hierarchies.....	231
3.5.1.1	Configuration commands.....	231
3.5.1.2	Show commands.....	232
3.5.2	Command descriptions.....	233
3.5.2.1	Configuration commands.....	233
3.5.2.2	Show commands.....	243
4	NETCONF.....	263
4.1	NETCONF overview.....	263
4.2	NETCONF in SR OS.....	264
4.2.1	YANG data models.....	264
4.2.2	Transport and sessions.....	265
4.2.3	NETCONF operations.....	266
4.2.3.1	<get>.....	266
4.2.3.2	<get-config>.....	267

4.2.3.3	<edit-config>.....	268
4.2.3.4	<copy-config> and <delete-config>.....	268
4.2.3.5	<validate>.....	268
4.2.4	Datastores and URLs.....	269
4.2.5	General NETCONF behavior.....	270
4.2.5.1	Example: multiple use of standard NETCONF namespace.....	270
4.2.5.2	Example: non-standard namespace defined in <rpc> tag.....	271
4.2.5.3	Example: non-standard namespace not defined in <rpc> tag.....	272
4.2.5.4	Example: non-standard namespace or prefix not defined in <rpc> tag.....	273
4.2.5.5	Example: chunked frame mechanism.....	274
4.2.5.6	Example: two rollback items with responses.....	275
4.2.5.7	Example: syntax error in the rollback request.....	276
4.2.5.8	Example: error in processing the request.....	277
4.2.5.9	Example: error in second item of the request.....	278
4.2.5.10	System provisioned configuration objects.....	279
4.3	Establishing a NETCONF session.....	280
4.4	XML content layer.....	281
4.4.1	<edit-config> with XML content layer.....	282
4.4.2	<get-config> with XML content layer.....	283
4.4.2.1	Example: request that returns an error.....	284
4.4.2.2	Example: content match node on a list key.....	285
4.4.2.3	Example: selection node that is a container.....	285
4.4.2.4	Example: list name node as an invalid selection node.....	286
4.4.2.5	Example: empty leaf node as invalid selection node.....	287
4.4.2.6	Example: key repeated in the same instance of the list node.....	287
4.4.2.7	Example: retrieving the full configuration.....	288
4.5	XML content layer examples.....	289
4.5.1	Example: checking NETCONF status.....	289
4.5.2	Example: creating a basic VPRN service.....	290
4.5.3	Example: creating a VPRN service with a SAP.....	290
4.6	CLI content layer.....	291
4.7	CLI content layer examples.....	292
4.7.1	Example: configuration change.....	292
4.7.2	Example: retrieving configuration information.....	293
4.7.3	Example: retrieving full configuration information.....	294
4.7.4	Example: <get> request.....	296

4.8	NETCONF command reference.....	297
4.8.1	Command hierarchies.....	297
4.8.1.1	Configuration commands.....	297
4.8.1.2	Show commands.....	298
4.8.1.3	Configuration commands.....	298
4.8.1.4	Show commands.....	304
5	Event and accounting logs.....	307
5.1	Logging overview.....	307
5.2	Log destinations.....	308
5.2.1	Console.....	308
5.2.2	Session.....	309
5.2.3	Memory logs.....	309
5.2.4	Log files.....	309
5.2.5	SNMP trap group.....	310
5.2.6	Syslog.....	311
5.2.6.1	Syslog implementation overview.....	311
5.2.6.2	Syslog over TLS for log events.....	314
5.3	Event logs.....	314
5.3.1	Event sources.....	315
5.3.2	Event control.....	316
5.3.3	Log manager and event logs.....	317
5.3.4	Event filter policies.....	318
5.3.5	Event log entries.....	319
5.3.6	Simple logger event throttling.....	320
5.3.7	Default system log.....	321
5.3.8	Event handling system.....	321
5.3.8.1	Supported shell command scenarios and examples.....	323
5.3.8.2	EHS support on 7210 SAS.....	327
5.4	Accounting logs.....	330
5.4.1	Accounting records.....	330
5.4.2	Accounting record names and collection periods.....	330
5.4.3	Accounting record details.....	335
5.4.4	Configuration guidelines.....	335
5.4.5	Reporting and time-based accounting.....	336
5.5	Configuration notes.....	336

5.6	Configuring logging with CLI.....	336
5.6.1	Log configuration overview.....	336
5.6.1.1	Log types.....	336
5.6.2	Basic event log configuration.....	337
5.6.3	Common configuration tasks.....	338
5.6.3.1	Configuring an event log.....	338
5.6.3.2	Configuring a file ID.....	338
5.6.3.3	Configuring an accounting policy.....	339
5.6.3.4	Configuring event control.....	340
5.6.3.5	Configuring throttle rate.....	340
5.6.3.6	Configuring a log filter.....	340
5.6.3.7	Configuring an SNMP trap group.....	341
5.6.3.8	Configuring SNMP dying gasp.....	342
5.6.3.9	Configuring a syslog target.....	343
5.6.4	Log management tasks.....	343
5.6.4.1	Modifying a log file.....	344
5.6.4.2	Deleting a log file.....	345
5.6.4.3	Modifying a file ID.....	345
5.6.4.4	Deleting a file ID.....	346
5.6.4.5	Modifying a syslog ID.....	347
5.6.4.6	Deleting a syslog.....	347
5.6.4.7	Modifying an SNMP trap group.....	348
5.6.4.8	Deleting an SNMP trap group.....	348
5.6.4.9	Modifying a log filter.....	349
5.6.4.10	Deleting a log filter.....	350
5.6.4.11	Modifying event control parameters.....	351
5.6.4.12	Returning to the default event control configuration.....	351
5.7	Log command reference.....	352
5.7.1	Command hierarchies.....	352
5.7.1.1	Configuration commands.....	353
5.7.1.2	Show commands.....	356
5.7.1.3	Clear commands.....	356
5.7.1.4	Tools dump commands.....	356
5.7.2	Command descriptions.....	356
5.7.2.1	Configuration commands.....	356
5.7.2.2	Show commands.....	405

5.7.2.3	Clear commands.....	426
6	TLS.....	427
6.1	TLS client interaction with applications.....	427
6.1.1	TLS application support.....	428
6.2	TLS handshake.....	428
6.3	TLS 1.3.....	430
6.3.1	TLS 1.3 handshake.....	430
6.3.2	TLS 1.2 and TLS 1.3 configuration.....	430
6.4	TLS client certificate.....	431
6.5	Certificate revocation status verification for TLS.....	431
6.6	Supported TLS ciphers.....	432
6.7	7210 SAS certificate management.....	433
6.7.1	Certificate profile.....	433
6.8	Operational guidelines.....	433
6.8.1	TLS authentication behavior (client-side).....	433
6.8.2	Client TLS profile and trust anchor behavior and scale.....	434
6.9	Basic TLS configuration.....	435
6.10	Common configuration tasks.....	435
6.10.1	Configuring a client TLS profile.....	435
6.10.2	Configuring a TLS client certificate.....	435
6.10.3	Configuring a TLS trust anchor.....	435
6.11	TLS command reference.....	436
6.11.1	Command hierarchies.....	436
6.11.1.1	Configuration commands.....	436
6.11.1.2	Show commands.....	438
6.12	Command descriptions.....	438
6.12.1	Configuration commands.....	438
6.12.1.1	TLS commands.....	438
6.12.1.2	Certificate management commands.....	452
6.12.1.3	PKI commands.....	459
6.12.2	Show commands.....	468
	tls.....	468
	cert-profile.....	468
	client-tls-profile.....	470
	trust-anchor-profile.....	471

	ca-profile.....	473
7	Facility alarms.....	475
7.1	Facility alarms overview.....	475
7.2	Facility alarms vs. log events.....	475
7.3	Facility alarm severities and alarm LED behavior.....	476
7.4	Facility alarm hierarchy.....	477
7.5	Facility alarm list.....	477
7.6	Configuring logging with CLI.....	480
7.6.1	Basic facility alarm configuration.....	480
7.6.2	Common configuration tasks.....	481
7.6.2.1	Configuring the maximum number of alarms to clear.....	481
7.7	Facility alarms command reference.....	481
7.7.1	Command hierarchies.....	481
7.7.1.1	Facility alarm configuration commands.....	481
7.7.1.2	Show commands.....	482
7.7.2	Command descriptions.....	482
7.7.2.1	Configuration commands.....	482
7.7.2.2	Show commands.....	483
8	Appendix: accounting record name details for 7210 SAS platforms.....	486
8.1	Accounting record name details for 7210 SAS-D.....	486
8.2	Accounting record name details for 7210 SAS-Dxp.....	493
8.3	Accounting record name details for 7210 SAS-K 2F1C2T.....	501
8.4	Accounting record name details for 7210 SAS-K 2F6C4T.....	507
8.5	Accounting record name details for 7210 SAS-K 3SFP+ 8C.....	515
9	Standards and protocol support.....	524
9.1	BGP.....	524
9.2	Certificate Management.....	526
9.3	Ethernet.....	526
9.4	EVPN.....	527
9.5	Fast Reroute.....	528
9.6	Internet Protocol (IP) — General.....	528
9.7	IP — Multicast.....	531
9.8	IP — Version 4.....	532

9.9	IP — Version 6.....	533
9.10	IPsec.....	534
9.11	IS-IS.....	535
9.12	Management.....	536
9.13	MPLS — General.....	539
9.14	MPLS — GMPLS.....	539
9.15	MPLS — LDP.....	540
9.16	MPLS — MPLS-TP.....	540
9.17	MPLS — OAM.....	541
9.18	MPLS — RSVP-TE.....	541
9.19	OSPF.....	541
9.20	Pseudowire.....	543
9.21	Quality of Service.....	543
9.22	RIP.....	544
9.23	Timing.....	544
9.24	VPLS.....	545

List of tables

Table 1: Supported modes of operation and configuration methods.....	20
Table 2: Supported port modes by mode of operation.....	22
Table 3: 7210 SAS platforms supporting port modes.....	23
Table 4: Configuration process.....	24
Table 5: Authorization support.....	31
Table 6: Supported authorization configurations.....	31
Table 7: Authorization and matches based on the command format.....	33
Table 8: Security methods capabilities.....	36
Table 9: VSAs for user profiles.....	43
Table 10: VSAs for file access control.....	43
Table 11: VSAs for system access methods.....	44
Table 12: VSAs for NETCONF RPCs.....	44
Table 13: Protocols and TCP/UDP ports used by applications on 7210 SAS platforms.....	49
Table 14: IPv4 and IPv6 match criteria.....	55
Table 15: CPU protection and squelching.....	57
Table 16: Security algorithm support per protocol.....	58
Table 17: Keychain mapping.....	69
Table 18: Security configuration requirements.....	71
Table 19: SSHv1 default ciphers.....	107
Table 20: SSHv2 default ciphers.....	107
Table 21: SSHv2 default client and server algorithms.....	110

Table 22: Mask formats.....	121
Table 23: Output fields: access group.....	195
Table 24: Output fields: security authentication.....	197
Table 25: Output fields: keychain.....	199
Table 26: Output fields: IP filter.....	201
Table 27: Output fields: IPv6 filter.....	203
Table 28: Output fields: password options.....	205
Table 29: Output fields: security profile.....	206
Table 30: Output fields: source address.....	207
Table 31: Output fields: show system security ssh.....	210
Table 32: Output fields: SSH server and client lists.....	212
Table 33: Output fields: security user.....	214
Table 34: Output fields: security view.....	216
Table 35: Output fields: users.....	217
Table 36: Output fields: system information.....	244
Table 37: Output fields: security access group.....	248
Table 38: Output fields: authentication.....	249
Table 39: Output fields: IP filter.....	252
Table 40: Output fields: password options.....	253
Table 41: Output fields: profile.....	255
Table 42: Output fields: SNMP community.....	257
Table 43: Output fields: SSH.....	258
Table 44: Output fields: security user.....	260

Table 45: Output fields: security view.....	261
Table 46: Output fields: system NETCONF.....	304
Table 47: Output fields: NETCONF counters.....	306
Table 48: Event severity levels.....	307
Table 49: Router to syslog severity-level mappings.....	311
Table 50: Valid filter policy operators.....	318
Table 51: Log entry field descriptions.....	319
Table 52: Accounting record names and collection periods for 7210 SAS-D.....	330
Table 53: Accounting record names and collection periods for 7210 SAS-Dxp.....	331
Table 54: Accounting record names and collection periods for 7210 SAS-K 2F1C2T.....	332
Table 55: Accounting record names and collection periods for 7210 SAS-K 2F6C4T.....	333
Table 56: Accounting record names and collection periods for 7210 SAS-K 3SFP+ 8C.....	334
Table 57: Log filenames.....	368
Table 58: Valid operators.....	375
Table 59: Valid operators.....	376
Table 60: Valid operators.....	378
Table 61: Severity levels.....	378
Table 62: Valid operators.....	379
Table 63: Facility codes.....	382
Table 64: Syslog message severity levels.....	384
Table 65: Output fields: accounting policy.....	407
Table 66: Output fields: accounting records.....	409
Table 67: Output fields: event control.....	412

Table 68: Output fields: file ID.....	413
Table 69: Output fields: filter ID.....	415
Table 70: Output fields: filter ID match criteria.....	416
Table 71: Output fields: log collector.....	418
Table 72: Output fields: log ID.....	421
Table 73: Output fields: SNMP trap group.....	423
Table 74: Output fields: syslog.....	425
Table 75: TLS application support.....	428
Table 76: TLS handshake step descriptions.....	429
Table 77: Output fields: certificate profile.....	469
Table 78: Output fields: TLS client profile.....	471
Table 79: Output fields: TLS trust anchor profile.....	472
Table 80: Output fields: CA profile.....	474
Table 81: Facility alarms.....	477
Table 82: linkDown Facility Alarm support.....	480
Table 83: Output fields: alarms.....	485
Table 84: Accounting record name details for 7210 SAS-D.....	486
Table 85: Accounting record name details for 7210 SAS-Dxp.....	493
Table 86: Accounting record details for 7210 SAS-K 2F1C2T.....	501
Table 87: Accounting record name details for 7210 SAS-K 2F6C4T.....	508
Table 88: Accounting record name details for 7210 SAS-K 3SFP+ 8C.....	515

List of figures

Figure 1: RADIUS requests and responses.....

27

Figure 2: Security flow.....

37

Figure 3: ETH-CFM hierarchical model.....

57

Figure 4: Packet format.....

68

Figure 5: SNMPv1 and SNMPv2c configuration and implementation flow.....

225

Figure 6: NETCONF RPC request.....

263

Figure 7: NETCONF layers (RFC 6241).....

264

Figure 8: Event logging block diagram.....

315

Figure 9: EHS object relationships.....

322

Figure 10: TLS handshake.....

428

Figure 11: Log events, alarms and LEDs.....

476

1 Getting started

This chapter provides an overview of the document organization and content, and describes the terminology used in this guide. It also provides process flow information to configure system security and access functions, and event and accounting logs.

1.1 About this guide

This guide describes the router security, SNMP features, and event and accounting logs for the following 7210 SAS platforms, operating in one of the modes described in [Table 1: Supported modes of operation and configuration methods](#). If multiple modes of operation apply, they are explicitly noted in the topic.



Note:

Unless explicitly noted otherwise, this guide uses 7210 SAS-Dxp to refer to the 7210 SAS-Dxp 12p, 7210 SAS-Dxp 16p, and 7210 SAS-Dxp 24p platforms.

- 7210 SAS-D
- 7210 SAS-Dxp 12p (2SFP+ 4SFP 6Tx)
- 7210 SAS-Dxp 16p (2SFP+ 4SFP 10Tx)
- 7210 SAS-Dxp 24p (2SFP+ 6SFP 16Tx)
- 7210 SAS-K 2F1C2T
- 7210 SAS-K 2F6C4T
- 7210 SAS-K 3SFP+ 8C

See [7210 SAS modes of operation](#) for information about the modes of operation supported by the 7210 SAS product family.



Note:

Unless explicitly noted otherwise, the phrase "Supported on all 7210 SAS platforms as described in this document" is used to indicate that the topic and CLI commands apply to all the 7210 SAS platforms in the following list, when operating in the specified modes only.

- **access-uplink mode of operation**

7210 SAS-D, 7210 SAS-Dxp, 7210 SAS-K 2F1C2T, 7210 SAS-K 2F6C4T, and 7210 SAS-K 3SFP+ 8C

- **network mode of operation**

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

When configured in the access-uplink or network mode of operation, the 7210 SAS platform implicitly operates in the standalone mode.

1.1.1 Document structure and content

This guide uses the following structure to describe features and configuration content.



Note:

This guide generically covers Release 26.x.Rx content and may include some content that will be released in later maintenance loads. See the *7210 SAS Software Release Notes 26.x.Rx*, part number 3HE 27852 000x TQZZA, for information about features supported in each load of the Release 26.x.Rx software.

- This guide is organized into functional chapters and provides concepts and descriptions of the implementation flow. Each chapter describes a software area and provides CLI syntax and command usage to configure parameters for the functional area.
- Command outputs shown in this guide are examples only; actual displays may differ depending on supported functionality and user configuration.
- See the *7210 SAS-Mxp, R6, R12, S, Sx, T Basic System Configuration Guide* for boot options to configure the [satellite](#) mode of operation on the router. See the 7750 SR software user guides for information about service and protocol provisioning, and operating the 7210 SAS router in [satellite](#) mode.
- Unless explicitly noted, the CLI commands and their configuration is similar for both [network](#) and [access-uplink](#) operating modes for features applicable to both modes of operation.

1.2 7210 SAS modes of operation

Unless explicitly noted, the phrase "mode of operation" and "operating mode" refers to the current operating mode of the 7210 SAS router. Each operating mode provides configuration access to a specific group of CLI commands.



Note:

Not all CLI commands are supported on all 7210 SAS platforms in all modes of operation. Users can only configure CLI commands supported by the current operating mode of the router. See the *7210 SAS Software Release Notes 26.x.Rx*, part number 3HE 27852 000x TQZZA, and to the appropriate 7210 SAS software user guide for information about features and capabilities supported by a 7210 SAS platform when operating in a specific mode.

The following modes of operation are supported by the 7210 SAS product family.

- **access-uplink**

In the access-uplink operating mode, the 7210 SAS router uplinks to the network using Layer 2 Ethernet VLAN switching (without IP/MPLS).

Platforms Supported: 7210 SAS-D, 7210 SAS-Dxp, 7210 SAS-K 2F1C2T, 7210 SAS-K 2F6C4T, 7210 SAS-K 3SFP+ 8C, and 7210 SAS-T

- **network**

In the network operating mode, the 7210 SAS router uses IP/MPLS uplinks to the network. The IP routing protocols and MPLS functionality is available; refer to the appropriate 7210 SAS software user guide for more information about supported features.

Platforms Supported: 7210 SAS-K 2F6C4T, 7210 SAS-K 3SFP+ 8C, 7210 SAS-Mxp, 7210 SAS-R6, 7210 SAS-R12, 7210 SAS-Sx/S 1/10GE, 7210 SAS-Sx 10/100GE, and 7210 SAS-T

- **satellite**

In the satellite operating mode, the 7210 SAS platform uses high-capacity uplinks (for example, 10GE ports on the 7210 SAS-Mxp and 100GE ports on the 7210 SAS-Sx 10/100GE) to connect to the 7750 SR host. The 7210 SAS router is managed by the 7750 SR host. There is no direct CLI access to the satellite node, and all services and protocols are configured on the host.

Platforms Supported: 7210 SAS-Mxp, 7210 SAS-Sx/S 1/10GE, and 7210 SAS-Sx 10/100GE

- **standalone**

In the standalone operating mode, the 7210 SAS platform supports IP/MPLS uplinks. It is operated and managed independently.

The functionality and features available on the standalone 7210 SAS platform are similar to the [network](#) operating mode. The standalone mode is primarily used to differentiate between a node being managed by the 7750 SR host (in the [satellite](#) operating mode), and a node managed independently (standalone operating mode).

Platforms Supported: 7210 SAS-Mxp, 7210 SAS-Sx/S 1/10GE, and 7210 SAS-Sx 10/100GE

- **standalone-VC**

In the standalone-VC operating mode, a set of 7210 SAS devices are stacked to provide larger 1GE/10GE port density and control-plane redundancy. The stack of nodes is provisioned and managed as a single chassis, and not as individual nodes.

The functionality and features available on the 7210 SAS platform are similar to the [network](#) operating mode, with additional capabilities, such as control-plane redundancy with non-stop routing and non-stop services.

Platforms Supported: 7210 SAS-Sx/S 1/10GE

For 7210 SAS platforms that support multiple explicit modes of operation ([Table 1: Supported modes of operation and configuration methods](#)), the operating mode must be configured in the Boot Option File (BOF) to ensure the router boots up in the specified mode. For example, the 7210 SAS-T supports access-uplink and network modes of operation, and the 7210 SAS-Sx/S 1/10GE supports satellite, standalone, and standalone-VC mode of operations. In some cases, the 7210 SAS router operates in a specific mode implicitly, and explicit configuration is not required.

See the appropriate *Basic System Configuration Guide* for boot options and information about how to boot the 7210 SAS platform in a specific operating mode.

The following table lists the supported modes of operation and the configuration methods for the 7210 SAS platforms. Unless explicitly noted otherwise, the operating mode is supported on all variants of the specific 7210 SAS platform.

Table 1: Supported modes of operation and configuration methods

7210 SAS platform	Mode of operation and configuration method				
	Network	Access-uplink	Standalone	Standalone-VC	Satellite
7210 SAS-D		Implicit	Implicit		
7210 SAS-Dxp		Implicit	Implicit		

7210 SAS platform	Mode of operation and configuration method				
	Network	Access-uplink	Standalone	Standalone-VC	Satellite
7210 SAS-K 2F1C2T		Implicit	Implicit		
7210 SAS-K 2F6C4T ¹	Port Mode Configuration ²	Port Mode Configuration ²	Implicit		
7210 SAS-K 3SFP+ 8C ¹	Port Mode Configuration ²	Port Mode Configuration ²	Implicit		
7210 SAS-Mxp	Implicit ³		Explicit BOF Configuration		Explicit BOF Configuration
7210 SAS-R6 ⁴	Implicit		Implicit		
7210 SAS-R12 ⁴	Implicit		Implicit		
7210 SAS-Sx/S 1/10GE	Implicit ³		Explicit BOF Configuration	Explicit BOF Configuration	Explicit BOF Configuration
7210 SAS-Sx 10/100GE	Implicit ³		Explicit BOF Configuration		Explicit BOF Configuration
7210 SAS-T	Explicit BOF Configuration	Explicit BOF Configuration	Implicit		

1.3 7210 SAS port modes

Unless explicitly noted, the phrase "port mode" refers to the current port configuration of the 7210 SAS node. The 7210 SAS platform supports the configuration of the following port modes.

- **access port mode**

Access ports are configured for customer-facing traffic if Service Access Points (SAPs) are required. The appropriate encapsulation type must be configured to distinguish the services on the port; services are configured on the port based on the encapsulation value.

Access ports can be configured on all the 7210 SAS platforms.

- **access-uplink port mode**

- ¹ By default, the 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C boot up in the [network](#) mode of operation. These platforms also allow the use of [access-uplink port mode](#) (without explicit BOF configuration), which provides the option to use Layer 2 uplinks instead of IP/MPLS uplinks to the network core, similar to the 7210 SAS-K 2F1C2T router.
- ² See section [7210 SAS port modes](#) for information about port mode configuration.
- ³ Implicitly operates in [network](#) mode when [standalone](#) mode of operation is configured.
- ⁴ Supports MPLS uplinks only and implicitly operates in network mode.

Access-uplink ports provide native Ethernet connectivity in service provider transport or in an infrastructure network. With this option, the encap-type can be configured to only QinQ. Access-uplink SAPs, which are QinQ SAPs, can only be configured on an access-uplink port to allow the operator to differentiate multiple services being carried over a single uplink port.

This is the default port mode of a 7210 SAS node in the [access-uplink](#) mode of operation.

- **network port mode**

Network ports are configured for network-facing traffic in the service provider transport or infrastructure network, and provide IP/MPLS uplinks.

This is the default port mode of a 7210 SAS node in the [network](#) or [standalone](#) mode of operation.

- **hybrid port mode**

Hybrid ports are configured for access and network facing traffic, and allow a single port to operate in both access and network modes.

Port modes available for configuration on a 7210 SAS node are determined by the current mode of operation of the router.



Note:

The 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C are unique; all port modes listed in [Table 2: Supported port modes by mode of operation](#) are available for configuration on the router, regardless of the current mode of operation.

The following table lists the port mode configuration support per 7210 SAS mode of operation.

Table 2: Supported port modes by mode of operation

Mode of operation	Supported port mode			
	Access	Network	Hybrid	Access-uplink
Access-Uplink	✓			✓
Network	✓	✓	✓	
Satellite ⁵				
Standalone	✓	✓	✓	
Standalone-VC	✓	✓	✓	

The following table lists the port mode configuration supported by the 7210 SAS product family. See the appropriate *Interface Configuration Guide* for more information about configuring the port modes for a specific platform.

⁵ Port modes are configured on the 7750 SR host and managed by the host.

Table 3: 7210 SAS platforms supporting port modes

Platform	Port Mode			
	Access	Network	Hybrid	Access-uplink
7210 SAS-D	Yes	No	No	Yes
7210 SAS-Dxp	Yes	No	No	Yes
7210 SAS-K 2F1C2T	Yes	No	No	Yes
7210 SAS-K 2F6C4T	Yes	Yes	Yes	Yes
7210 SAS-K 3SFP+ 8C	Yes	Yes	Yes	Yes
7210 SAS-Mxp	Yes	Yes	Yes	No
7210 SAS-R6 IMM-b (IMMv2)	Yes	Yes	Yes	No
7210 SAS-R6 IMM-c 100GE (IMM-c 1QSFP28)	Yes	Yes	Yes	No
7210 SAS-R12 IMM-b	Yes	Yes	Yes	No
7210 SAS-R12 IMM-c 100GE (IMM-c 1QSFP28)	Yes	Yes	Yes	No
7210 SAS-Sx/S 1/10GE	Yes	Yes	Yes	No
7210 SAS-Sx 10/100GE	Yes	Yes	Yes	No
7210 SAS-T	Yes	Yes ⁶	Yes ⁷	Yes ⁸

1.4 7210 SAS system management configuration process

The following table lists the tasks necessary to configure system security and access functions and logging features. Each chapter in this book is presented in an overall logical configuration flow. Each section describes a software area and provides CLI syntax and command usage to configure parameters for a functional area.

⁶ Network ports are supported only if the node is operating in network mode.

⁷ Hybrid ports are supported only if the node is operating in network mode.

⁸ Access-uplink ports are supported only if the node is operating in access-uplink mode.

Table 4: Configuration process

Area	Task	Chapter
System security	Configure system security parameters, such as authentication, authorization, and accounting	Security
Network management	Configure SNMP elements	SNMP
Secure network management	Configure NETCONF elements	NETCONF
Operational functions	Configure event and accounting logs	Event and accounting logs
Reference	List of IEEE, IETF, and other proprietary entities	Standards and protocol support

1.5 Conventions

This section describes the general conventions used in this guide.

1.5.1 Precautionary and information messages

The following information symbols are used in the documentation.



DANGER: Danger warns that the described activity or situation may result in serious personal injury or death. An electric shock hazard could exist. Before you begin work on this equipment, be aware of hazards involving electrical circuitry, be familiar with networking environments, and implement accident prevention procedures.



WARNING: Warning indicates that the described activity or situation may, or will, cause equipment damage, serious performance problems, or loss of data.



Caution: Caution indicates that the described activity or situation may reduce your component or system performance.



Note: Note provides additional operational information.



Tip: Tip provides suggestions for use or best practices.

1.5.2 Options or substeps in procedures and sequential workflows

Options in a procedure or a sequential workflow are indicated by a bulleted list. In the following example, at step 1, the user must perform the described action. At step 2, the user must perform one of the listed options to complete the step.

Example: Options in a procedure

1. User must perform this step.
2. This step offers three options. User must perform one option to complete this step:
 - This is one option.
 - This is another option.
 - This is yet another option.

Substeps in a procedure or a sequential workflow are indicated by letters. In the following example, at step 1, the user must perform the described action. At step 2, the user must perform two substeps (a. and b.) to complete the step.

Example: Substeps in a procedure

1. User must perform this step.
2. User must perform all substeps to complete this action:
 - a. This is one substep.
 - b. This is another substep.

2 Security

This chapter provides information to configure security features.

2.1 Authentication, authorization, and accounting

This chapter describes authentication, authorization, and accounting (AAA) used to monitor and control network access on routers. Network security is based on a multistep process. The first step, authentication, validates a user's credentials. The second step, authorization, allows the user to access and execute commands at various command levels based on profiles assigned to the user. The third step, accounting, keeps track of the activity of users who have accessed the network. The type of accounting information recorded can include a history of the commands executed, the amount of time spent in the session, the services accessed, and the data transfer size during the session. The accounting data can be used for trend analysis, billing, and auditing purposes.

The router can be configured to use local, Remote Authentication Dial-In User Service (RADIUS), Terminal Access Controller Access Control System Plus (TACACS+), security to validate users who attempt to access the router by console, SSH, Telnet, File Transfer Protocol (FTP), or other supported interfaces. Users can also select the order in which the authentication methods are attempted.

The router supports the following security features:

- Local security can be implemented for authentication and authorization.
- RADIUS can be used for authentication, authorization, and accounting.
- TACACS+ can be used for authentication, authorization, and accounting.




Note:

Connectivity to RADIUS and TACACS+ server can be established through base routing instance or through VPRN along with GRT/base routing instance route-leaking on platforms that support GRT route leaking.

The following figure shows end-user access requests sent to a RADIUS server. After validating the usernames and passwords, the RADIUS server returns an access-accept message to the users on ALA-1 and ALA-2. The username and password from ALA-3 could not be authenticated, therefore access is denied.

Figure 1: RADIUS requests and responses

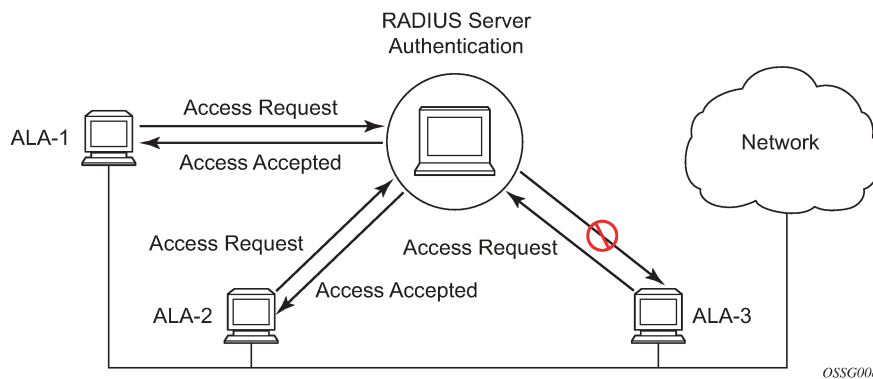

2.1.1 Authentication

Authentication validates a username and password combination when a user attempts to log in.

When a user attempts to log in through the console, SSH, FTP, or other methods, the client sends credentials to the router. Based on the received credentials, the router creates and sends an authentication request to a RADIUS, TACACS+, or local database. The order in which the router tries different types of AAA servers and local databases is defined by the configured authentication order.

Transactions between the router and a RADIUS or TACACS+ server are authenticated through the use of a shared secret. The secret is never transmitted over the network. User passwords are sent encrypted between the client and the AAA (RADIUS, TACACS+, or LDAP) server which prevents someone snooping on an insecure network to learn password information.

If the AAA server (of the chosen authentication method) does not respond within a specified time, the router issues the access request to the next configured server of the same authentication method. Each AAA server must be configured identically to guarantee consistent results.

If any AAA server rejects the authentication request, it sends an access reject message to the router. In this case, no access request is issued to any other AAA servers of the chosen authentication method. However, if other authentication methods, such as TACACS+ or local, are configured and the **exit-on-reject** option is not set, then these methods are attempted. If no other authentication methods are configured, or all methods reject the authentication request, then access is denied.

For the AAA server selection, round-robin is used if multiple AAA servers for one particular authentication method are configured. Although, if the first alive server in the list cannot find a username, the router does not re-query the next server in the AAA server list for that authentication method and denies the access request. It may get authenticated on the next login attempt if the next selected AAA server has the appropriate username. It is recommended that the same user databases are maintained for AAA servers to avoid inconsistent behavior.

The user login is successful when the AAA server accepts the authentication request and responds to the router with an access accept message.

Implementing authentication without authorization for the routers does not require the configuration of VSAs (Vendor Specific Attributes) on the AAA server. However, users, user access permissions, and command authorization profiles must be configured on each router.

Any combination of these authentication methods can be configured to control network access from a router:

- [Local authentication](#)
- [RADIUS authentication](#)
- [TACACS+ authentication](#)

2.1.1.1 Local authentication

Local authentication uses PKI or usernames and passwords as authentication credentials to authenticate login attempts. The authentication credentials are local to each router, not to user profiles.

By default, local authentication is enabled. When one or more of the other security methods are enabled, local authentication is used in case it is configured as first method in the authentication order, or if other authentication methods are configured before local in the authentication order and fail.

Locally, usernames, public keys, and password management information can be configured. This is referred to as local authentication.

2.1.1.2 RADIUS authentication

RADIUS is a client/server security protocol and software that enables remote access servers to communicate with a central server to authenticate users and authorize access to the requested system or service.

RADIUS allows administrators to maintain user profiles in a shared central database and provides better security, allowing a company to set up a policy that can be applied at a single administered network point.

2.1.1.2.1 RADIUS server selection

The RADIUS server selection algorithm is used by different applications:

- RADIUS for user management

Up to five RADIUS servers can be configured for each application.

The RADIUS server selection algorithm works in direct mode.

For direct mode, the first server is used as the primary server. If this server is unreachable, the next server based on the server index is used. This continues until either all servers have been tried or an answer is received.

A RADIUS server is considered available initially and marked as unavailable if no response packets are received in a period equal to the configured packet timeout multiplied by the retry count after sending a request.

A server that is down can only be tried again after 30 seconds have elapsed. If, within the 30 seconds, a valid RADIUS reply is received for that server, the server immediately becomes available again.

A server is always marked as available when any valid RADIUS packet is received from that server.

2.1.1.2.1.1 Server reachability detection

A server is reachable when the server is operationally up and a valid response is received within a timeout period that is configured using the retry command option at the RADIUS policy level.

A server is considered unreachable when the server is operationally down, or when one of the following situations occurs:

- **timeout**

A number of consecutive timeouts are encountered for a specific server. Use the following commands to configure the timeout:

```
configure system security radius timeout
```

- **send failure**

A packet cannot be sent to the RADIUS server because the forwarding path toward the RADIUS server has failed; for example, the route is not available or the interface is shut down.

If a send failure occurs, no retry mechanism is invoked and the next server in line is immediately used.

A server that is down can only be used again after 30 seconds have elapsed. If, within the 30 seconds, a valid RADIUS reply is received for that server, the server immediately becomes available again.

The operational state of a server can also be "unknown" if the RADIUS application is not aware of the state of the RADIUS server. For example, if the server was previously down but no requests had been sent to the server, it would not be certain yet whether the server is reachable.

2.1.1.3 TACACS+ authentication

Terminal Access Controller Access-Control System Plus (TACACS+) is an authentication protocol that allows a remote access server to forward a user login password to an authentication server, to determine whether access is allowed to a system. In contrast to RADIUS, which combines authentication and authorization, TACACS+ separates these operations.

2.1.1.4 Password management

The following sections describe password hashing and control.

2.1.1.4.1 Password hashing

7210 SAS supports two algorithms for user password hashing: bcrypt, which is the default algorithm, and PBKDF2. The PBKDF2 algorithm can use SHA2 (SHA-256).



Note:

PBKDF2 is supported by all 7210 SAS platforms as described in this document, except the 7210 SAS-D.

Use the following command to configure the algorithm to hash all user passwords:

```
configure system security password hashing
```

When password hashing is configured, the following sequence of steps occurs at login:

1. The node checks the stored password and notes its hash algorithm.
2. The password entered by the user is hashed with the noted algorithm, and the node compares the hash with the stored user password hash.
3. If the entered and stored passwords are the same, and if the hash algorithm of the stored user password is different from the hash algorithm of the system password, the user is prompted to enter a new password two times to ensure password match. The node stores this new password in the RAM (not in the system configuration file).

To store the new password in the configuration file, an admin user must perform the **admin save** command. If the **admin save** command is not executed, on the next reboot the hash algorithm of the stored user password may be different from the system hash, and the user must go through this process again from step 2.

After an upgrade to a software load that supports PBKDF2, the default password continues to be stored using the bcrypt algorithm. The following example describes the procedure to change the algorithm. In this example, the algorithm is changed to PBKDF2, and "User_name" can be any user:

1. User_name logs in and runs the **hashing** command to change the algorithm.
2. To save the algorithm change, an admin user performs an **admin save** command.
3. To store User_name's password using PBKDF2, the admin user changes User_name's password.

From this point onward, any new user passwords or changes to existing user passwords are stored using PBKDF2.

2.1.1.4.2 Password control

The 7210 SAS supports a rich a set of password controls including configurable complexity rules, password age rules and more. Please see some of the configuration commands available under the following context:

```
configure system security password
```

2.1.2 Authorization

The 7210 SAS supports local, RADIUS, and TACACS+ authorization to control the actions of specific users. The following authorization methods can be configured to control actions of specific users:

- [Local authorization](#)
- [RADIUS authorization](#)
- [TACACS+ authorization](#)

Local authorization and RADIUS authorization operate by applying a command authorization profile that is associated with the user.

For RADIUS authorization, the profiles are configured locally on the router or downloaded using VSAs from a RADIUS server. See [RADIUS VSAs](#).

For TACACS+ authorization, local profiles configured on the router can be used or remote profiles configured on the TACACS+ server can be used whereby each command is sent to the TACACS+ server for authorization.

The following table lists authorization support.

Table 5: Authorization support

Server or profile	Classic CLI	NETCONF
TACACS+	Yes	Yes
RADIUS	Yes	Yes
Local	Yes	Yes

Authorization profiles apply to the classic CLI, and NETCONF. See [Authorization profiles for classic CLI](#) for more details.

2.1.2.1 Local authorization

Local authorization uses user profiles and user access information after a user is authenticated. The profiles and user access information specifies the actions the user is allowed to perform.

2.1.2.2 RADIUS authorization

RADIUS authorization grants or denies access permissions for a user. Permissions include the use of FTP, Telnet, SSH (SCP and SFTP), and console access. When granting Telnet, SSH (SCP and SFTP), and console access to the router, authorization can be used to limit user access to the CLI commands and files.

When a user has been authenticated using RADIUS (or another method), the router can be configured to perform authorization. The RADIUS server can be used to:

- download the user command authorization profile to the router
- send the profile name that the router should apply to the user (these profiles must be created on each router)

If RADIUS authentication is successful and no authorization is configured for the user on the RADIUS server, local (router) authorization is attempted, if configured using the **authentication-order** command.

When authorization is configured and profiles are downloaded to the router from the RADIUS server, the profiles are considered temporary configurations and are not saved when the user session terminates.

The temporary profiles are only downloaded if the user authenticates via RADIUS. RADIUS-based authorization is not supported for users who authenticate locally or via TACACS+.

The following table lists the supported authorization configurations.

Table 6: Supported authorization configurations

	Local	RADIUS supplied profile
Locally configured user	✓	
RADIUS server configured user	✓	✓
TACACS+ server configured user	✓	

When using authorization, maintaining a user database on the router is not required. Usernames can be configured on the RADIUS server. Usernames are temporary and are not saved in the configuration when the user session terminates. Temporary user login names and their associated passwords are not saved as part of the configuration.

2.1.2.3 TACACS+ authorization

TACACS+command authorization operates in different modes:

- [Single common access controls with a local command authorization profile](#)
- [Common access controls with per-command authorization with TACACS+](#)
- Common access controls with [TACACS+ services and VSAs](#)

2.1.2.3.1 Single common access controls with a local command authorization profile

All users who authenticate with TACACS+ use a single common TACACS+ default template with a local authorization profile that controls:

- access to the console port CLI, FTP, gRPC, LI commands, NETCONF, SCP/SFTP, SNMP, SSH CLI, and Telnet CLI
- file access
- authorization for CLI commands, NETCONF operations, and gRPC RPCs

The **use-default-template** command must be enabled.

To use a single, common command authorization profile for TACACS+ users, the TACACS+ default template must be enabled and configured with a valid local profile. The local profile is then used for command authorization. TACACS+ **authorization** must be disabled.

Example

Use the following commands to configure a single common local command profile called "TACPLUS_USERS" for command authorization for all TACACS+ users:

```
configure system security tacplus use-default-template
configure system security user-template tacplus_default profile "TACPLUS_USERS"
configure system security tacplus no authorization
```

See [TACACS+ configuration for file access control using VSAs](#) for examples on optionally using VSAs for file access control.

2.1.2.3.2 Common access controls with per-command authorization with TACACS+

Per-command authorization with the TACACS+ server can be used instead of using a local CLI command authorization profile.

When the **authorization** command is enabled, each CLI command the user issues is sent to the TACACS+ server for authorization. The SR OS authorization request contains the first word of the CLI command as the value for the TACACS+ **cmd** and all the following words as a **cmd-arg**. Quotation marks are removed from quoted values and the values are seen as one **cmd** or **cmd-arg**.

Example

Use the following commands to configure common access controls with per-command authorization with TACACS+:

```
configure system security tacplus authorization
configure system security tacplus use-default-template
```

See [TACACS+ attribute value authorization example](#) for an example of the **cmd** and **cmd-arg** attribute value (AV) pairs sent to the TACACS+ server. SR OS sends the entire CLI context in the **cmd** and **cmd-arg** attribute value (AV) pairs. See [TACACS+ configuration for file access control using VSAs](#) for examples of optionally using VSAs for file access control.

2.1.2.3.3 TACACS+ attribute value authorization example

For TACACS+ authorization, 7210 SAS the CLI command in the **cmd** and **cmd-arg** attribute value (AV) pairs in the **shell** service (not shown in the output that follows).

 **Note:** Command accounting logs the command as it was entered.

Example: AV pairs resulting from commands entered in the classic CLI

```
/configure
cmd=configure

/configure system
cmd=configure
cmd-arg=system

/configure system name node-2
cmd=configure
cmd-arg=system
cmd-arg=name
cmd-arg=node-2

/configure system no name
cmd=configure
cmd-arg=system
cmd-arg=no
cmd-arg=name
```

2.1.2.4 Authorization profiles for classic CLI

Authorization profiles can be configured to match commands in the classic CLI syntax.

The following table shows authorization and matches based on the command format. The same matching applies when authorization is done using local profiles, RADIUS and TACACS+.

Table 7: Authorization and matches based on the command format

Profile entry format	Classic CLI	NETCONF
Classic CLI	Yes	Maybe



Note: Nokia recommends testing the profiles in each CLI engine to confirm the desired action occurs.

2.1.2.5 Configuring authorization

The following section authorization describes how to configure authorization for some specific cases.

2.1.2.5.1 System-provisioned local authorization profiles

The 7210 SAS provides the following built-in (system-provisioned) local command authorization profiles. These profiles can be removed or modified.

- default
- administrative

The built-in profiles are applicable to users using the classic CLI, and contain rules that apply to classic CLI.

By default, in 7210 SAS, the administrative profile is associated with the default user named `admin`.

In the classic CLI, the default profile is automatically assigned to any newly-created user, but the user can remove the profile from any user and replace it with another profile. The classic CLI also has an internal mechanism that denies access to **show system security** commands for all users, so users must be given access to these commands with a permit entry in a profile.

2.1.2.6 Configuration guidelines for authorization

The following are the behaviors for the RPC and command authorization when two profiles are attached under a user:

- For the NETCONF RPC type, look at all profiles that are assigned to a user, and if a specific RPC is permitted in one of them, it is permitted for the user. In other words, the permissions for NETCONF RPCs are logically OR-ed from all locally assigned profiles.
- The commands are authorized by looking at profiles one by one. Look through all entries in the first profile (entries are sorted by entry ID). If an entry is matched, take its action, and the command is permitted or denied based on that action. The second profile is only be used if no entry in the first is matched and the **default-action** in the first profile is **none**. In that case, proceed to the second profile.

2.1.3 Accounting

When enabled, RADIUS accounting sends command line accounting from the router to the RADIUS server. The router sends accounting records using UDP packets at port 1813 (decimal).

The router issues an accounting request packet for each event requiring the activity to be recorded by the RADIUS server. The RADIUS server acknowledges each accounting request by sending an accounting response after it has processed the accounting request. If no response is received in the time defined in the timeout parameter, the accounting request must be retransmitted until the configured retry count is exhausted. A trap is issued to alert the NMS (or trap receiver) that the server is unresponsive. The router issues the accounting request to the next configured RADIUS server (up to 5).

User passwords and authentication keys of any type are never transmitted as part of the accounting request.

2.1.3.1 RADIUS accounting

Accounting can be configured independently from RADIUS authorization and RADIUS authentication for CLI command accounting.

When enabled, RADIUS accounting sends accounting requests from the router to the RADIUS server on UDP port 1813, or TCP port 2083 if TLS is configured. The server receives accounting requests and returns a response to the router indicating that it has successfully received the request. Each request issued on the router generates a record sent to the RADIUS server. If no response is received in the timeout period, the accounting request is retransmitted until the retry count is exhausted. In this case, the router sends the accounting request to the next configured RADIUS server.

User information, passwords and authentication keys are never transmitted as part of the accounting request.

2.1.3.2 TACACS+ accounting

The 7210 SAS allows the administrator to configure the type of accounting record packet that is to be sent to the TACACS+ server when specified events occur on the device. The **accounting record-type** command option indicates whether TACACS+ accounting start and stop packets will be sent or just stop packets be sent. Start/stop messages are only sent for individual commands, not for the session.

The router checks the configuration to see if TACACS+ accounting is required for the particular event when:

- a user logs in to request access to the network using Telnet or SSH
- a user enters a command for which accounting command options are configured
- a system event occurs, such as a reboot or a configuration file reload

If TACACS+ accounting is required, then, depending on the accounting record type specified, the device sends a start packet to the TACACS+ accounting server that contains information about the event.

The TACACS+ accounting server acknowledges the start packet and records information about the event. When the event ends, the device sends a stop packet. The stop packet is acknowledged by the TACACS+ accounting server.

2.1.3.3 Command accounting log events

In addition to RADIUS and TACACS+ accounting, 7210 SAS supports a set of log events dedicated to command accounting:

- cli_user_io
- snmp_user_set
- cli_config_io
- cli_unauth_user_io
- cli_unauth_config_io
- netconf_auth

- netconf_unauth

2.1.4 Server health check monitoring

Health check monitoring of the RADIUS and TACACS+ servers is performed by sending requests at regular intervals, by default every 30 seconds. If a response is not received, the operational status of the server is changed to down. The operational status is changed to up when responses are received.

When health check monitoring is disabled, the operational status for the server is up if a response to the last request was received.

Use the following command to configure health check monitoring:

```
configure system security password health-check
```

Different health check monitoring requests are sent depending on the server type.

- RADIUS – An authentication request for the user P1Z1X2C7S9Y9B008c, where c is a random character, is sent and an Access-Reject response is expected.
- TACACS+ – A TCP connection to the server is opened and then closed.

The servers are accessed in order from lowest to highest specified index (from 1 to 5) for authentication requests until a response from a server is received. A higher indexed server is only queried if no response is received from a lower indexed server. If a response from the server is received, no other server is queried.

2.1.5 User access control method ordering

The user can configure routers to use RADIUS, TACACS+, and local AAA methods to validate users requesting access to the network. The order in which requests are processed among RADIUS, TACACS+, and local methods can be specifically configured. For example, the authentication order can be configured to process authorization using TACACS+ first, then RADIUS for authentication and accounting. Local access can be specified last in the authentication order if the RADIUS and TACACS+ servers are not operational.

The following table lists security methods capabilities.

Table 8: Security methods capabilities

Method	Authentication	Authorization	Accounting
Local	✓	✓	✓ ⁹
TACACS+	✓	✓	✓ 9
RADIUS	✓	✓	✓ 9

⁹ CLI commands are always logged in local command accounting log events such as cli_user_io.

Authentication and authorization request flow

Use the commands in the following context to define the authentication and authorization order shown in [Figure 2: Security flow](#).

```
configure system security password authentication-order
```


The order is determined by specifying the sequence in which an authentication or authorization method is attempted when the **exit-on-reject** command option is disabled.

Example: Authentication and authorization method flow

[Figure 2: Security flow](#) shows an example that uses the order of RADIUS, then TACACS+, and finally, local. A request is sent to RADIUS server 1. If there is no response from the server, the request is sent to the next RADIUS server and so on, until the last RADIUS server is attempted (RADIUS server 5). If server 5 does not respond, the request is sent to TACACS+ server 1. If there is no response from that server, the request is sent to the next TACACS+ server, and so on.

If a request is sent to an active RADIUS server and the username and password are not recognized, access is denied and the next method is attempted, in this case, the TACACS+ server. The process continues until the request is either permitted, denied, or each server is queried. Finally, if the request is denied by the active TACACS+ server, the local method is attempted. This is the last chance for the access request to be permitted.

Figure 2: Security flow

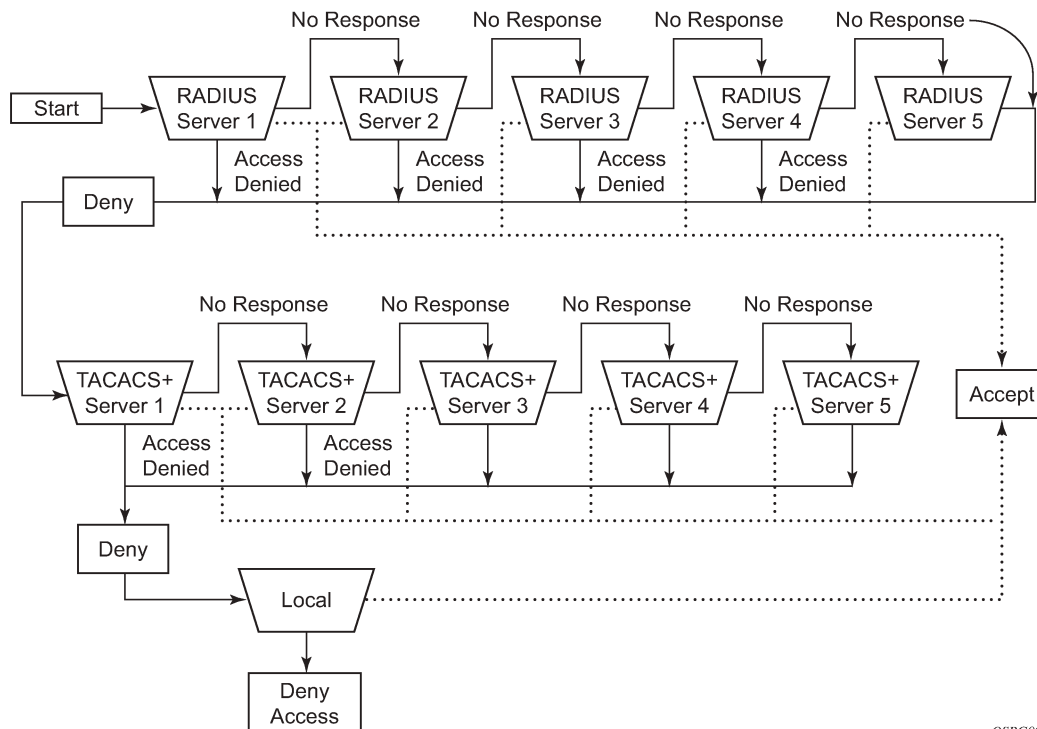

OSRG009

2.2 RADIUS VSAs

The 7210 SAS supports the configuration of Nokia-specific RADIUS attributes. These attributes are known as vendor-specific attributes (VSAs) and are defined in RFC 2138. If VSAs are not configured on the RADIUS server, the RADIUS user authenticates with options defined in the RADIUS default template when **use-default-template** is enabled. If VSAs are used, all mandatory VSAs must be configured for the RADIUS user to authenticate. It is up to the vendor to specify the format of their VSA. The attribute-specific field is dependent on the vendor definition of that attribute. The Nokia-defined attributes are encapsulated in a RADIUS vendor-specific attribute with the vendor ID field set to 6527, the vendor ID number. Nokia VSAs are defined in the `dictionary-freeradius.txt` file in the `support` folder of the software distribution.

The following RADIUS VSAs for AAA are supported:

- **Timetra-Access** `<ftp + console + netconf + scp-sftp + console-port-cli + ssh-cli + telnet-cli >`

This VSA specifies the router management access methods a user can access. Multiple access methods can be specified by adding the value of the access methods to allow in the RADIUS server configuration file. This VSA is mandatory when the RADIUS default template is disabled. It corresponds to the following commands:

```
configure system security user access
```

For example, use the following to allow console port CLI, SSH CLI, and NETCONF access.

```
Timetra-Access = 100 # 32 (console-port-cli) + 64 (ssh-cli) + 4 (netconf)
```

or:

```
Timetra-Access = console-port-cli  
Timetra-Access += ssh-cli  
Timetra-Access += netconf
```

- **Timetra-Profile** `<string>`

This VSA is mapped to the user profile which must be configured on the router. It corresponds to the following command:

```
configure system security user console member
```

The following guidelines apply to local and remote authentication:

- The **authentication-order** configured on the router must include the **local** command option.
- The username may or may not be configured on the router.
- The user must be authenticated by the RADIUS server.
- A temporary profile is created when the user authenticates that is evaluated before local profiles. The Timetra-Default-Action VSA must be sent with a value of **none** so that the local profiles are evaluated after the temporary profile if the RADIUS default template is disabled. The profiles and evaluation order assigned to the user can be displayed with the **show system security user detail** command.

- Up to eight local profiles can exist on the router for a user. The sequence in which the profiles are specified is relevant. The most explicit matching criteria must be ordered first. The process stops when the first complete match is found.

If all of the preceding conditions are not met, access to the router is denied and a failed login event or trap is written to the security log.

- **Timetra-Action <permit | deny | read-only>**

This VSA specifies the action when the user has entered a command specified in the Timetra-Cmd VSA, and is mandatory in sequence after the Timetra-Cmd VSA. It corresponds to the following command:

```
configure system security profile entry action
```

- **Timetra-Default-Action <permit-all | deny-all | read-only-all | none>**

This VSA specifies the default action when the user has entered a command, and no entry configured in the Timetra-Cmd VSA for the user has matched. This VSA is mandatory when the RADIUS default template is disabled. It corresponds to the following command:

```
configure system security profile default-action
```

- **Timetra-Cmd <string>**

This VSA configures a command or command subtree as the scope for the match condition for the action specified in the Timetra-Action VSA, and is mandatory in sequence before the Timetra-Action VSA. The command and all commands in subtrees are authorized. If an invalid command is specified, the radiusUserProfileInvalid event is logged and authentication fails. It corresponds to the following command:

```
configure system security profile entry match
```

- **Timetra-Home-Directory <string>**

This VSA specifies the home directory. It cannot be used to delete a home directory that is configured in the RADIUS default template. It corresponds to the following command:

```
configure system security user home-directory
```

- **Timetra-Restrict-To-Home <true | false>**

This VSA specifies whether user access is limited to their home directory (and directories and files in the home directory). If this VSA is not configured, the user is allowed to access the entire file system. It corresponds to the following command:

```
configure system security user restricted-to-home
```

- **Timetra-Save-When-Restricted <true | false>**

When this VSA is set to true, the user can execute configuration save operations (for example, **admin save**) via any management interface (CLI, NETCONF, and so on) when Timetra-Restrict-To-Home is set to true. It corresponds to the following command:

```
configure system security user save-when-restricted
```

- **Timetra-Exec-File <string>**

This VSA specifies a user login exec file, which executes whenever the user successfully logs in to a console session. It corresponds to the following command:

```
configure system security user console login-exec
```

- **Timetra-NETCONF-BaseOp** <close-session | copy-config | delete-config | edit-config | get | get-config | kill-session>

This VSA specifies the NETCONF operations that the user can execute. It corresponds to the following commands:

```
configure system security profile netconf base-op-authorization
```

Multiple operation values can be specified in any order separated by semicolons (;) in the RADIUS server configuration file, for example.

```
Timetra-NETCONF-BaseOp = close-session;commit;discard-changes;edit-config;get-config;lock;validate
```

Multiple RPCs can also be specified on different lines in the RADIUS server configuration file, for example.

```
Timetra-NETCONF-BaseOp = close-session,  
Timetra-NETCONF-BaseOp += commit,  
Timetra-NETCONF-BaseOp += discard-changes,  
Timetra-NETCONF-BaseOp += edit-config,  
Timetra-NETCONF-BaseOp += get-config,  
Timetra-NETCONF-BaseOp += lock,  
Timetra-NETCONF-BaseOp += validate
```

If an invalid operation is specified, a deny-all profile is installed and the radiusUserProfileInvalid event is logged.

- **Timetra-NETCONF-Default-Action** <permit | deny>

This VSA specifies the default action when the user has executed an operation, and no operation configured in the Timetra-NETCONF-BaseOp VSA for the user has matched. It is mandatory when the Timetra-NETCONF-BaseOp VSA is used. There is no corresponding configuration command.

2.2.1 RADIUS configuration for file access control using VSAs

Configure file access control in one of the following ways depending on the file access requirements of users:

- locally with no VSAs
- with VSAs



Note: File access is denied when the **restricted-to-home** command is configured, unless the **home-directory** command is configured and the directory is created by an administrator.

Example: RADIUS server with VSA configuration for per-user home directories, and a locally configured default template for other options

This example shows the following configuration:

- All users can save the configuration.
- On the router: each user has a home directory with restricted file access. The administrator must create the home directory for each user.
- On the RADIUS server: the home directory is configured with a VSA.
- On the router: optionally, access to copy files to the router with SCP/SFTP is configured in the RADIUS default template.
- On the router: other file access controls are configured in the RADIUS default template.

RADIUS server configuration

```
user1
  Timetra-Home-Directory = "cf3:\users\user1"

user2
  Timetra-Home-Directory = "cf3:\users\user2"

user3
  Timetra-Home-Directory = "cf3:\users\user3"

user4
  Timetra-Home-Directory = "cf3:\users\user4"
```

Example: RADIUS server with VSA configuration and per-user home directories

This example shows the following configuration:

- All file access controls are configured with VSAs, which is the most flexible option to grant different file access to each user.
- On the router: each user has a home directory with restricted file access. The administrator must create the home directory for each user.
- On the router: the RADIUS default template is not used for file access.
- On the RADIUS server: access to copy files to the router with SCP/SFTP is configured with VSAs.
- On the RADIUS server: the administrator can also restrict file access to the home directory of the user and allow users to save the configuration based on the VSA value.

The user1 profile has access to all files and user1 can save the configuration and copy files to the router with SCP/SFTP.

RADIUS server configuration

```
user1
  Timetra-Access = 112 # 16 + (scp-sftp) + 32 (console-port-cli) + 64 (ssh-cli)
  # Timetra-Home-Directory is not defined
  Timetra-Restrict-To-Home = false
  # Timetra-Save-When-Restricted is not defined
```

The user2 profile has home directory access and user2 can save the configuration and copy files to the router with SCP/SFTP.

RADIUS server configuration

```
user2
  Timetra-Access = 112 # 16 + (scp-sftp) + 32 (console-port-cli) + 64 (ssh-cli)
  Timetra-Home-Directory = "cf3:\users\user2",
  Timetra-Restrict-To-Home = true,
```

```
Timetra-Save-When-Restricted = true
```

The user3 profile has home directory access but user3 cannot save the configuration or copy files to the router with SCP/SFTP.

RADIUS server configuration

```
user3
  Timetra-Access = 96 # 32 (console-port-cli) + 64 (ssh-cli)
  Timetra-Home-Directory = "cf3:\users\user3",
  Timetra-Restrict-To-Home = true,
  Timetra-Save-When-Restricted = false
```

The user4 profile has no file access and user4 cannot save the configuration.

RADIUS server configuration

```
user4
  Timetra-Access = 96 # 32 (console-port-cli) + 64 (ssh-cli)
  # Timetra-Home-Directory is not defined
  Timetra-Restrict-To-Home = true,
  Timetra-Save-When-Restricted = false
```

2.3 TACACS+ services and VSAs

The 7210 SAS supports several services with VSAs for user access control. Administrators can optionally configure the services and VSAs for each user on a TACACS+ server instead of configuring them locally on the router.

Services and VSAs are available for the following user access control parameters:

- The **nokia-user** service and [Table 9: VSAs for user profiles](#) that correspond to the following command:

```
configure system security user console
```

- The **nokia-user** service and [Table 10: VSAs for file access control](#) that correspond to the following command:

```
configure system security user
```

- The **nokia-user** service and [Table 11: VSAs for system access methods](#) that correspond to the following command:

```
configure system security user access
```

- The **nokia-netconf-base-op-authorization** service and [Table 12: VSAs for NETCONF RPCs](#) that correspond to the following command:

```
configure system security profile netconf base-op-authorization
```

When a user authenticates with TACACS+, the router:

- when enabled, requests the **nokia-user** and **nokia-netconf-base-op-authorization** services and VSAs from the server for authorization after authentication succeeds
- uses the values from VSAs when present, and when not present uses the following:

- values from the TACACS+ default template when the TACACS+ default template is enabled
- disabled or no values when the TACACS+ default template is disabled
- rejects invalid VSA values and authentication fails
- rejects unknown mandatory VSAs and authentication fails
- discards unknown optional VSAs and authentication succeeds

User profiles are applied in the following precedence order to create the most restrictive default values. When a step matches, no further profiles are applied.

1. TACACS+ default template, when enabled

2. **deny-all** default action for the **nokia-user** and **nokia-netconf-base-op-authorization** VSAs when they are not received

All service names, VSA names, and values must entered be in lowercase in the TACACS+ server configuration.

Table 9: VSAs for user profiles

Service name	VSA name	Description	Values
nokia-user	login-exec	File to execute when the user logs in	A string up to 200 characters
nokia-user	profile	User profile	A string up to 32 characters. The profile must be configured on the router.

Table 10: VSAs for file access control

Service name	VSA name	Description	Values
nokia-user	home-directory	Home directory for the user	A string up to 200 characters
nokia-user	restricted-to-home	Restrict file access to the home directory of the user	true – denies the user from accessing files outside their home directory false – permits the user to access all files on the system
nokia-user	save-when-restricted	Save configurations when the user is restricted to home	true – allows configuration save operations for all configuration regions, for example, bof, debug, configure, or li via any management interface such as, CLI and NETCONF even if

Service name	VSA name	Description	Values
			restricted-to-home is enabled false – denies saving the configuration when restricted-to-home is enabled



Note: One access method VSA is mandatory when the TACACS+ default template is disabled.

Table 11: VSAs for system access methods

Service name	VSA name	Description	Values
nokia-user	console-access	Allow console port CLI, SCP/SFTP, SSH CLI, and Telnet CLI access	true – permits access false – denies access
nokia-user	console-port-cli-access	Allow console port CLI access	true – permits access false – denies access
nokia-user	ftp-access	Allow FTP access	true – permits access false – denies access
nokia-user	netconf-access	Allow NETCONF access	true – permits access false – denies access
nokia-user	scp-sftp-access	Allow SCP/SFTP access	true – permits access false – denies access
nokia-user	ssh-cli-access	Allow SSH CLI access	true – permits access false – denies access
nokia-user	telnet-cli-access	Allow Telnet CLI access	true – permits access false – denies access

Table 12: VSAs for NETCONF RPCs

Service name	VSA name	Description	Values
nokia-netconf-base-op-authorization	default-action	Default action when a VSA for an RPC is not defined. This VSA is mandatory when the nokia-netconf-base-op-authorization service is used.	permit-all – permits all RPCs deny-all – denies all RPCs

Service name	VSA name	Description	Values
nokia-netconf-base-op-authorization	action	Allow the NETCONF <action> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	close-session	Allow the NETCONF <close-session> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	copy-config	Allow the NETCONF <copy-config> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	delete-config	Allow the NETCONF <delete-config> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	edit-config	Allow the NETCONF <edit-config> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	get	Allow the NETCONF <get> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	get-config	Allow the NETCONF <get-config> RPC	true – permits the RPC false – denies the RPC
nokia-netconf-base-op-authorization	kill-session	Allow the NETCONF <kill-session> RPC	true – permits the RPC false – denies the RPC

2.3.1 TACACS+ configuration for file access control using VSAs

Configure file access control in one of the following ways depending on the file access requirements of users:

- locally with no VSAs
- locally using the TACACS+ default template and some VSAs that are different for each user
- using the file access VSAs to control file access, and the TACACS+ default template for other user access controls



Note: File access is denied when the **restricted-to-home** command is configured unless the **home-directory** command is configured and the directory is created by an administrator.



Note: Some TACACS+ servers require the backslash character (\) to escape the backslash (\) character in quoted strings in the server configuration file (`tac_plus.conf`); for example:

- **home-directory** = `cf3:\users\user1`
- **home-directory** = `"cf3:\\users\\user1"`

Example: TACACS+ server with VSA configuration for per-user home directories, and a locally configured default template for other options

This example shows the following configurations:

- All users can save the configuration.
- On the router: each user has a home directory with restricted file access. The administrator must create the home directory for each user.
- On the router: the **nokia-user** service is enabled with the following command:

```
configure system security tacplus service-request nokia-user
```

- On the TACACS+ server: the home directory is configured with a VSA.
- On the router: **use-default-template** is enabled, and optionally, access to copy files to the router with SCP/SFTP is configured in the TACACS+ default template.
- On the router: other file access controls are configured in the TACACS+ default template.

TACACS+ server configuration

```
user = user1 {  
    service = nokia-user {  
        home-directory = cf3:\users\user1  
    }  
}  
  
user = user2 {  
    service = nokia-user {  
        home-directory = cf3:\users\user2  
    }  
}  
  
user = user3 {  
    service = nokia-user {  
        home-directory = cf3:\users\user3  
    }  
}  
  
user = user4 {  
    service = nokia-user {  
        home-directory = cf3:\users\user4  
    }  
}
```

Example: TACACS+ server with VSA configuration and per-user home directories

This example shows the following configurations:

- All file access is controlled with VSAs, which is the most flexible option to grant different file access to each user.
- On the router: each user has a home directory with restricted file access. The administrator must create the home directory for each user.
- On the router: the **nokia-user** service is enabled with the following command:

```
configure system security tacplus service-request nokia-user
```

- On the router: **use-default-template** is enabled and the TACACS+ default template is not used for file access.
- On the TACACS+ server: access to copy files to the router with SCP/SFTP is configured with VSAs.

- On the TACACS+ server: the administrator can also restrict file access to the home directory of the user and allow users to save the configuration based on the VSA value.

The user1 profile has access to all files and user1 can save the configuration, and copy files to the router with SCP/SFTP.

TACACS+ server configuration

```
user = user1 {  
  service = nokia-user {  
    scp-sftp-access = true  
    # home-directory is not defined  
    restricted-to-home = false  
    # save-when-restricted is not defined  
  }  
}
```

The user2 profile has home directory access and user2 can save the configuration, and copy files to the router with SCP/SFTP.

TACACS+ server configuration

```
user = user2 {  
  service = nokia-user {  
    scp-sftp-access = true  
    home-directory = cf3:\users\user2  
    restricted-to-home = true  
    save-when-restricted = true  
  }  
}
```

The user3 profile has home directory access but user3 cannot save the configuration or copy files to the router with SCP/SFTP.

TACACS+ server configuration

```
user = user3 {  
  service = nokia-user {  
    # scp-sftp-access is not defined  
    home-directory = cf3:\users\user3  
    restricted-to-home = true  
    save-when-restricted = false  
  }  
}
```

The user4 profile has no file access and user4 cannot save the configuration or copy files to the router with SCP/SFTP.

TACACS+ server configuration

```
user = user4 {  
  service = nokia-user {  
    # scp-sftp-access is not defined  
    # home-directory is not defined  
    restricted-to-home = true  
    save-when-restricted = false  
  }  
}
```

2.4 Control and management traffic protection

7210 SAS platforms support an extensive set of configurable mechanisms to protect the CPU from being flooded with control or management traffic.

The protection mechanisms are a set of configurable hardware-based filters, classification, queuing, and rate-limiting functions that drop unwanted traffic before it reaches the control processor.

- In-band traffic extracted from the line cards to the control processing module (CPM) on chassis-based systems, or extracted from front-panel ports on fixed form-factor devices:
 - line card or fixed form-factor platform features:
 - ACLs filters - IPv4, IPv6, and MAC
 - anti-spoofing, uRPF (supported only on the 7210 SAS-K 3SFP+ 8C)
 - CPM features:
 - centralized CPU protection
- out-of-band and in-band traffic:
 - management access filters

2.4.1 CPM management access filters

CPM traffic is extracted from the data plane and sent to the CPM for processing. Packets from all network and access ports can be filtered using management access filters, which use CPU resources. Packets originating from a management Ethernet port can also be filtered using management access filters.

2.4.1.1 CPM protocols and ports

Nokia recommends using a strict CPM management access filter that allows traffic from trusted IP subnets for protocols and ports actively used in the router and explicitly drops other traffic.

The following table identifies the protocols and TCP/UDP ports used per application on 7210 SAS platforms. The source port and destination port reflect the CPM management access filter entry configuration for traffic that is ingressing the router and is sent to the CPM.



Note:

Out-of-band management ports are not supported on the 7210 SAS platforms as described in this guide.

Table 13: Protocols and TCP/UDP ports used by applications on 7210 SAS platforms

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
BFD application								
	3784	UDP	BFD control 1 hop BFD				✓	✓
	3785	UDP	BFD echo				✓	✓
	4784	UDP	BFD control multi-hop				✓	✓
BGP application								
	179	TCP	BGP: server terminated TCP sessions				✓	✓
179		TCP	BGP: client responses for initiated TCP session				✓	✓
DHCPv4 application								
67	67	UDP	DHCPv4: relay agent to server; server to relay agent; relay agent to relay agent	✓	✓	✓	✓	✓
68	67	UDP	DHCPv4: client to relay agent; client to server	✓	✓	✓	✓	✓
67	68	UDP	DHCPv4: relay agent to server;	✓	✓	✓	✓	✓

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
			relay agent to client					
DHCPv6 application								
546	547	UDP	DHCPv6: client to server; client to relay agent				✓	✓
547	546	UDP	DHCPv6: server to relay agent; relay agent to server; relay agent to relay agent				✓	✓
DNS application								
53		UDP	DNS Client	✓	✓	✓	✓	✓
FTP application								
	20	TCP	FTP server data and active FTP client	✓	✓	✓	✓	✓
	21	TCP	FTP server control	✓	✓	✓	✓	✓
20		TCP	FTP client data	✓	✓	✓	✓	✓
21		TCP	FTP client control	✓	✓	✓	✓	✓
GRE application								
N/A	N/A	GRE	GRE				✓	✓
ICMP application								

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
N/A	N/A	ICMP	ICMP	✓	✓	✓	✓	✓
IGMP application								
N/A	N/A	IGMP	IGMP	✓	✓	✓	✓	✓
LDP application								
	646	UDP	LDP hello adjacency				✓	✓
	646	TCP	LDP/T-LDP: terminated TCP sessions				✓	✓
646		TCP	LDP/T-LDP: responses for initiated TCP sessions				✓	✓
MC-APS application								
	1025	UDP	Multi-chassis LAG				✓	✓
MCS application								
	45067	TCP	Multi-chassis synchronization: terminated TCP session				✓	✓
45067		TCP	Multi-chassis synchronization: responses for initiated TCP session				✓	✓
NETCONF application								

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
	830	TCP	NETCONF			✓	✓	
NTP application								
	123	UDP	NTP server	✓	✓	✓	✓	✓
123		UDP	NTP client	✓	✓	✓	✓	✓
OAM application								
	3503	UDP	LSP ping				✓	✓
	33408 to 33535	UDP	OAM traceroute				✓	✓
OSPF application								
N/A	N/A	OSPF	OSPF				✓	✓
PCEP application								
	4189	TCP	Path Computation Element Protocol (PCEP)				✓	✓
PIM application								
	3232	UDP	PIM MDT				✓	✓
N/A	N/A	PIM	PIM				✓	✓
PTP application								
	319	UDP	1588 PTP event	✓	✓	✓	✓	✓
	320	UDP	1588 PTP general	✓	✓	✓	✓	✓

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
RADIUS application								
1812		UDP	RADIUS authentication	✓	✓	✓	✓	✓
1813		UDP	RADIUS accounting	✓	✓	✓	✓	✓
2083		TCP	RADIUS over TLS		✓	✓	✓	✓
RSVP application								
N/A	N/A	RSVP	RSVP				✓	✓
SNMP application								
	161	UDP	SNMP server; SET and GET commands	✓	✓	✓	✓	✓
SSH application								
	22	TCP	SSH server and terminated TCP session	✓	✓	✓	✓	✓
22		TCP	SSH client and responses for initiated TCP sessions	✓	✓	✓	✓	✓
Syslog application								
6514		TCP	Syslog client TLS		✓	✓	✓	✓
TACACS application								

TCP/ UDP port number		IP protocol	Application description	Protocols and ports available for in-band and out-of-band management on 7210 SAS platforms				
Source	Destination			SAS- D	SAS- Dxp	SAS-K 2F2C2T	SAS-K 2F6C4T	SAS-K 3SFP+ 8C
				In-band	In-band	In-band	In-band	In-band
49		TCP	TACACS client and responses for initiated TCP sessions	✓	✓	✓	✓	✓
TELNET application								
	23	TCP	TELNET server	✓	✓	✓	✓	✓
TWAMP application								
	862	TCP	TWAMP control: terminated TCP session	✓	✓	✓	✓	✓
	Any	UDP	TWAMP test	✓	✓	✓	✓	✓
	1 to 65535	UDP	TWAMP light (per router instance)		✓	✓	✓	✓
VRRP application								
N/A	N/A	VRRP	VRRP				✓	✓

2.4.2 Management Access Filter



Note:

IPv6 Management Access Filters (MAFs) are not supported on the 7210 SAS-K 2F1C2T.

MAFs are software-based filters used to restrict traffic extracted from the data plane and restrict traffic from the management port to the CPU.

2.4.2.1 MAF packet match

Two different **management-access-filter** policies can be configured: **ip-filter** and **ipv6-filter**.

The following are the MAF packet match rules:

- Each MAF policy is an ordered list of entries; therefore, entries must be sequenced correctly from the most to the least explicit.
- If multiple match criteria are specified in a single MAF policy entry, all criteria must be met for the packet to be considered a match against that policy entry (logical AND).
- Any match criteria not explicitly defined is ignored during a match.
- A MAF filter policy entry defined without a match criteria is inactive.
- A MAF filter policy entry with match criteria defined but no action configured inherits the default action defined at the **management-access-filter** level.
- The **management-access-filter default-action** applies individually per IPv4 or IPv6 filter policies that are in a **no shutdown** state.

2.4.2.2 MAF IPv4/IPv6 filter entry match criteria

The following table lists the supported IPv4 and IPv6 match criteria.

Table 14: IPv4 and IPv6 match criteria

Criteria	Description
dst-port	Matches the specified port value against the destination port number of the UDP or TCP packet header.
flow-label	Matches the IPv6 flow label.
fragment	Matches fragmented or non-fragmented IP packets.
next-header	Matches the specified upper-layer protocol (such as TCP, UDP, or IGMPv6) against the next-header field of the IPv6 packet header. "*" can be used to specify a TCP or UDP upper-layer protocol match (logical OR). Next-header matching also allows matching on presence of a subset of IPv6 extension headers. See Management Access Filter commands for details about which extension header match is supported.
l4-source-port	Matches the specified port value against the L4 source port number of the UDP or TCP packet header.
protocol	Matches the specified protocol against the Protocol field in the IPv4 packet header (for example, TCP, UDP, or IGMP) of the outer IPv4. "*" can be used to specify TCP or UDP upper-layer protocol match (logical OR).
router	Matches the router instance that packets are ingressing from for this filter entry.
src-ip	Matches the specified source IPv4 or IPv6 address prefix and mask against the source IPv4 or IPv6 address field in the IP packet header.

Criteria	Description
src-port	Matches the packets that are ingressing from this port.

2.4.2.3 MAF policy action

MAFs allow actions to **permit** or **deny** (or use the **deny-host-unreachable** response for IP filters) traffic.

2.4.2.4 MAF policy statistics and logging

The management access filter match count can be displayed using **show** commands. Logging is recorded in the system security logs.

2.5 Centralized CPU protection

The 7210 SAS provides rate limiting mechanisms to protect the CPM/CFM processing resources of the router. Centralized CPU protection is a centralized rate-limiting function that operates on the CPM to limit traffic destined for the CPUs. The CPU protection mechanism is not user-configurable. It is supported on all 7210 SAS platforms. For historical reasons, the term "centralized CPU protection" is called "CPU protection" in this user guide.

When it is configured on a node, the CPU protection mechanism protects the CPU from a DoS attack by limiting the amount of ingress port traffic destined for the CPM to be processed by its CPU. On the 7210 SAS, a set of dedicated policers are used to limit the amount of traffic to the software-defined rate (the rate is not user-configurable) before the packets are queued to the CPU queues. A strict policy scheduler schedules packets from the CPU queues. A CPU queue traffic shaper, configured to a pre-defined rate by software, is used to limit the amount of traffic for a protocol or group of protocols using the CPU queue. In most cases, access interfaces and network uplinks do not share the policers and CPU queues used to manage the amount of traffic sent to the CPM. Access interfaces (typically used to deliver customer services) use a dedicated set of policers and CPU queues; a separate set is used for network facing ports (that is, network ports, hybrid ports, and access-uplink ports).

2.5.1 ETH-CFM ingress squelching




Note: ETH-CFM squelching is only user configurable on the 7210 SAS-Dxp. On the 7210 SAS-K platforms, CFM packets are dropped by default when received on the passive side of the UP MEP that has a level less than or equal to the level of the configured MEP.

The 7210 SAS implements a mechanism to protect the CPU on extraction when a management port (MP) is configured. It is also important to protect the ETH-CFM architecture deployed in the service provider network. This protection mechanism varies from CPU protection. This model prevents the ETH-CFM frames at the service provider MD-levels from gaining access to the network even when extraction is not in place. ETH-CFM squelching drops all ETH-CFM packets at or below the configured MD-level. The ETH-CFM squelch feature is supported at ingress only.

Figure 3: ETH-CFM hierarchical model shows a typical ETH-CFM hierarchical model with a subscriber ME (6), test ME (5), EVC ME (4), and an operator ME (2). This model provides the necessary transparency

at each level of the architecture. For security reasons, it may be necessary to prevent errant levels from entering the service provider network at the UNI or other untrusted interconnection points. Configuring squelching at level four on both UNI-N interconnection ensures that ETH-CFM packets matching the SAP delimited configuration silently discards ETH-CFM packets at ingress.

Figure 3: ETH-CFM hierarchical model

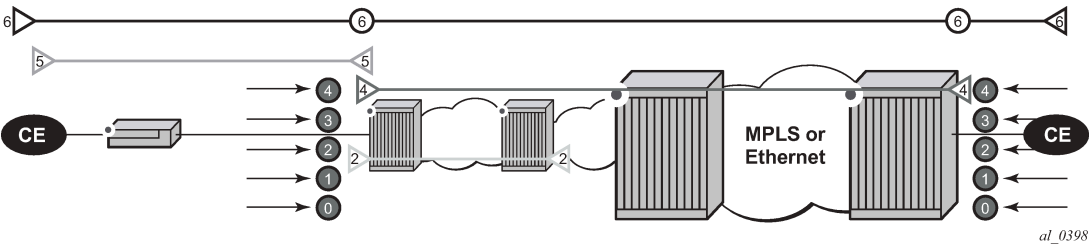

Squelching configuration uses a single MD-level (0 to 7) to silently drop all ETH-CFM packets matching the SAP delimited configuration at the specified MD-level. For example, if a squelch level is configured at MD-level 4, the configuration silently discards MD-levels 4, assuming there is a SAP match.

 **Caution:** Use extreme caution when deploying this feature.

The operator can configure down MEPs and ingress MIPs that conflict with the squelched levels. This means that any existing MEP or MIP that is processing ingress CFM packets on a SAP is interrupted as soon as squelching is enabled. These MPs are unable to receive any ingress ETH-CFM frames because squelching is processed before ETH-CFM extraction.

CPU protection for ETH-CFM is still required in [Figure 3: ETH-CFM hierarchical model](#) because the subscriber ME (6) and the test ME (5) enter the network across an untrusted connection, the UNI. Squelching is processed first, followed by the CPU protection for ETH-CFM.

 **Note:** The dot1q-range SAP on the 7210 SAS-Dxp supports primary VLANs on up MEPs. This support is subject to the ETH-CFM squelch function.

CPU protection is used to control access to the CPU resources when processing is required. Squelching is required when the operator is protecting the ETH-CFM architecture from external sources. The difference between the two protection mechanisms is described in the following table.

 **Note:** CPU protection is not user configurable on 7210 SAS platforms.

Table 15: CPU protection and squelching

Description	CPU protection for ETH-CFM	ETH-CFM squelching
Ingress filtering	Yes	Yes
Egress filtering	Yes	—
Granularity	All MPs configured on this node	Level
Rate	System-defined rate (not user configurable)	Silent drop

Description	CPU protection for ETH-CFM	ETH-CFM squelching
Primary VLAN support	Rate shared with all MPs	Exposed to squelch
Extraction	Requires MEP or MIP to extract	No MEP or MIP required

Use the following commands to display squelching information.

```
show service service-id all
show service sap-using eth-cfm squelch-ingress-levels
```

Output example: show service sap-using squelch-ingress-levels

```
=====
ETH-CFM Squelching
=====
PortId          SvcId      Squelch Level
-----
6/1/1:100.*     1          0 1 2 3 4 5 6 7
lag-1:100.*     1          0 1 2 3 4
6/1/1:200.*     2          0 1 2
lag-1:200.*     2          0 1 2 3 4 5
-----
Number of SAPs: 4
-----
```

2.6 Other security features

This sections describes security features supported on the 7210 SAS.

2.6.1 Security algorithms



Note:

The protocols listed in the following table are only supported on the 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C, except for NTP which is supported on the 7210 SAS-Dxp, 7210 SAS-K 2F1C2T, 7210 SAS-K 2F6C4T, and 7210 SAS-K 3SFP+ 8C.

The following table lists the security algorithms supported per protocol.

Table 16: Security algorithm support per protocol

Protocol	Clear text	MD5	HMAC-MD5	HMAC-SHA1-96	HMAC-SHA1	HMAC-SHA256	AES-128-CMAC-96	AES-128-CMAC-128
OSPF	✓	✓		✓	✓	✓		

Protocol	Clear text	MD5	HMAC-MD5	HMAC-SHA1-96	HMAC-SHA1	HMAC-SHA256	AES-128-CMAC-96	AES-128-CMAC-128
IS-IS	✓		✓		✓	✓		
RSVP	✓		✓		✓			
BGP				✓			✓	
LDP		✓		✓			✓	
NTP								✓

2.6.2 Secure Shell (SSH)

Secure Shell (SSH) is a protocol that provides a secure, encrypted Telnet-like connection to a router. A connection is always initiated by the client (the user). Authentication takes place by one of the configured authentication methods (local, RADIUS, or TACACS+). With authentication and encryption, SSH allows for a secure connection over an insecure network.

SR OS only supports SSH version 2 (SSHv2). When a configuration contains SSH version 1 (SSHv1), SSHv1 is deprecated from the configuration, and the configuration migrates to SSHv2 using the default cipher list. This is only applicable to the 7210 SAS-Dxp and 7210 SAS-K.



Note:

SSHv1 is only supported on the 7210 SAS-D. All other 7210 SAS platforms described in this document support SSHv2. SSHv1 and SSHv2 are different protocols and encrypt at different parts of the packets. SSHv1 uses a server as well as host keys to authenticate systems whereas SSHv2 only uses host keys. SSHv2 does not use the same networking implementation that SSHv1 does and is considered a more secure, efficient, and portable version of SSH.



Note:

- SSH for IPv4 is supported on all platforms as described in this document.
- SSH for IPv6 is supported on all platforms as described in this document, except the 7210 SAS-K 2F1C2T.

SSH runs on top of a transport layer (like TCP or IP), and provides authentication and encryption capabilities.

The 7210 SAS has a global SSH server process to support inbound SSH and SCP sessions initiated by external SSH or SCP client applications.



Note:

This server process is separate from the SSH and SCP client commands on the routers which initiate outbound SSH and SCP sessions.

Inbound SSH sessions are counted as inbound Telnet sessions for the purposes of the maximum number of inbound sessions specified by Login Control. Inbound SCP sessions are counted as inbound FTP sessions by Login Control.

When the server is enabled, both inbound SSH and SCP sessions are accepted, as long as the session is properly authenticated. When the global SSH server process is disabled, no inbound SSH or SCP sessions are accepted.

When using SCP to copy files from an external device to the file system, the SCP server accepts either forward slash ("/") or backslash ("\") characters to delimit directory and filenames. Similarly, the SCP client application can use either slash or backslash characters, but not all SCP clients treat backslash characters as equivalent to slash characters. In particular, UNIX systems often interpret the backslash character as an "escape" character which does not get transmitted to the SCP server. For example, a destination directory specified as "cfl:\dir1\file1" will be transmitted to the SCP server as "cfl:dir1file1" where the backslash escape characters are stripped by the SCP client system before transmission. On systems where the client treats the backslash like an "escape" character, a double backslash "\\" or the forward slash "/" can typically be used to properly delimit directories and the filename.

2.6.2.1 SSH and Telnet ports



Note: This feature is supported on all platforms described in this document, except the 7210 SAS-D.

For security reasons, the SSH and Telnet ports are configurable to a value other than the well-defined default port value. This configuration makes it difficult for unauthorized users to scan the SSH or Telnet ports and launch Denial of Service (DoS) attacks. On 7210 SAS SR OS SSH and Telnet servers, the listening SSH and Telnet ports are configurable. In addition, the 7210 SAS SR OS SSH and Telnet clients can initiate an SSH or Telnet connection to a specific non-default SSH or Telnet port.



Note: The listening port configuration for SSH or Telnet is not supported for the VPRN Global Routing Table (GRT) leaking (allow management) feature. This means that management via VPRN (GRT leaking) is disabled as soon as the port is changed to a non-default port. This is only applicable to 7210 SAS platforms that support the GRT leaking feature.

2.6.2.1.1 Application configuration for SSH and Telnet

The listening port value can be configured in the range of 1024 to 49151. The SSH and Telnet ports should not be configured in the respective well-known port ranges.

2.6.2.1.2 Ensuring no other application is using the SSH or Telnet port

When users attempt to configure a new value for the default SSH or Telnet port, the SSH or Telnet application, respectively, checks whether the port is in use by another protocol. If the port is in use, the configuration is blocked and a "Port is already in use" warning is displayed.

The newly configured port cannot be overwritten by any other protocol, even if there is no active SSH or Telnet session. After the port is configured, no other protocol is allowed to reserve the port.

2.6.2.1.3 Behavior in base routing

In base routing, after the SSH or Telnet port is changed, the previous port remains open; existing sessions are not disconnected, but new connections cannot be established on that port.



Note: For base routing, Nokia recommends setting management access filters to block unwanted ports and IP addresses.

2.6.2.1.4 NETCONF behavior

The following system behaviors apply:

- There is only one instance of an SSH server in the system, but it can bind to and listen on multiple TCP ports; one port for NETCONF and the second one for other SSH services.
- The ports for NETCONF and other SSH services are independent of each other.
- The SSH server (for other services) can be configured to listen on ports 22 and 1024 to 49151.
- NETCONF can be configured to listen on ports 830 or 22 only, and does not follow the SSH port change.

2.6.2.1.5 Known limitations

When SSH or Telnet connections to the initial port exist via inband or OOB, the port change back to the initial value is blocked until all connections to the initial port are closed. For example:

- If the port is changed and there are open connections to the changed port via inband or OOB, the connections must be closed manually to be able to revert to the previous port.
- If SSH is connected to port 22 and the user changes the port to 22000, the change is effective immediately, but the SSH connection to port 22 remains open.
- Until all connections to port 22 are closed, the port cannot be changed back from 22000 to 22.

2.6.2.2 SSH PKI authentication



Note:

This feature is supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D.

The SSH server supports a public key authentication provided that the server has been previously configured to know the client's public key.

Using public key authentication, also known as Public Key Infrastructure (PKI), can be more secure than the existing username and password method because of the following:

- A user typically reuses the same password with multiple servers. If the password is compromised, the user must reconfigure the password on all affected servers.
- A password is not transmitted between the client and server using PKI. Instead the sensitive information (the private key) is kept on the client. Consequently, the password is less likely to be compromised.

The 7210 SAS supports server-side SSHv2 public key authentication, but does not include a key-generation utility.

PKI should be configured in the system-level configuration where one or more public keys may be bound to a username. This configuration does not affect any other system security or login functions.

PKI has preference over password or keyboard authentication. PKI is supported using only local authentication. PKI authentication is not supported on TACACS+ or RADIUS.

2.6.2.2.1 SSH user public key generation

Before SSH can be used with PKI, the client must generate a public/private key pair. This is typically supported by the SSH client software. For example, PuTTY supports a utility called PuTTYGen that generates key pairs.

The 7210 SAS currently supports only Rivest, Shamir, and Adleman (RSA) and Elliptic Curve Digital Signature Algorithm (ECDSA) user public keys.

If the SSH client software uses PuTTY, it must first generate a key pair using PuTTYGen. The client sets the key type to SSH-2 RSA and configures the number of bits to be used for the key. The client can also configure a passphrase to store the key locally in encrypted form. If the passphrase is configured, it acts as a password that the client must enter to use the private key. If a passphrase is not configured, the private key is stored in plaintext locally.

Next, use the **config>system>security>user>public-keys** command to configure the public key for the client (the public key is obtained as part of the key pair). On the 7210 SAS, the user can program the public key using CLI commands (accessed through Telnet/SSH) or SNMP.



Note:

The preceding process to generate a key pair is an example only. This process is not executed on a 7210 SAS node, but on a third-party node acting as the SSH client or any other node.

2.6.2.3 SSH MAC client and server list



Note:

- Configurable MAC client and server list is supported on all 7210 SAS platforms with SSHv2 as described in this document. Configurable MAC client and server list is not supported on the 7210 SAS-D.
- The 7210 SAS-D supports the following client and server MAC lists by default (not user configurable):
 - hmac-md5
 - hmac-sha1
 - hmac-ripemd160
 - hmac-ripemd160@openssh.com
 - hmac-sha1-96
 - hmac-md5-96

The 7210 SAS supports a configurable client and server MAC list for SSHv2, which allows the user to add or remove Message Authentication Code (MAC) algorithms from the list. The user can program the

strong Hashed Message Authentication Code (HMAC) algorithms on top of the configurable MAC list (for example, lowest index in the list) to be negotiated first between the client and server. The first algorithm in the list that is supported by both the client and the server is the one that is agreed upon.

There are two configurable MAC lists:

- client list
- server list

The default client and server MAC list includes all supported algorithms in the following preference order:

1. mac 200 name hmac-sha2-512
2. mac 210 name hmac-sha2-256
3. mac 215 name hmac-sha1
4. mac 220 name hmac-sha1-96
5. mac 225 name hmac-md5
6. mac 240 name hmac-md5-96

2.6.2.4 SSH cipher client and server list



Note:

This feature is supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D.

The 7210 SAS-D supports the following client and server cipher lists by default (not user configurable):

- aes128-cbc
- 3des-cbc
- blowfish-cbc
- cast128-cbc
- arcfour
- aes192-cbc
- aes256-cbc
- rijndael-cbc@lysator.liu.se

The 7210 SAS supports cipher client and server lists. The user can add or remove the required SSH cipher client and server algorithms to be negotiated. The list is an index list with the lower index having higher preference in the SSH negotiation. The lowest index algorithm in the list is negotiated first in SSH connections and is on top of the negotiation list to the peer.

The default server and client lists for SSHv2 include all supported algorithms in the following preference order:

1. cipher 190 name aes256-ctr
2. cipher 192 name aes192-ctr
3. cipher 194 name aes128-ctr
4. cipher 200 name aes128-cbc

5. cipher 205 name 3des-cbc
6. cipher 225 name aes192-cbc
7. cipher 230 name aes256-cbc

Use the following CLI to configure the client and server cipher list.

```
*A:Dut-C# configure system security ssh client-cipher-list
- client-cipher-list

[no] cipher          - Configure a cipher

*A:Dut-C# configure system security ssh client-cipher-list cipher
- cipher <index> name <cipher-name>
- no cipher <index>

<index>              : [1..255]
<cipher-name>        : aes128-ctr|aes192-ctr|aes256-ctr|3des-cbc|aes128-cbc|
                      aes192-cbc|aes256-cbc

*A:Dut-C# configure system security ssh server-cipher-list
- server-cipher-list

[no] cipher          - Configure a cipher

*A:Dut-C# configure system security ssh server-cipher-list cipher
- cipher <index> name <cipher-name>
- no cipher <index>

<index>              : [1..255]
<cipher-name>        : aes128-ctr|aes192-ctr|aes256-ctr|3des-cbc|aes128-cbc|
                      aes192-cbc|aes256-cbc
```

2.6.2.5 SSH KEX client and server list



Note:

- Key exchange (KEX) client and server lists are supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D.
- The 7210 SAS-D supports the following KEX list by default (not user configurable):
 - diffie-hellman-group-exchange-sha1
 - diffie-hellman-group1-sha1

The 7210 SAS supports configurable KEX client and server lists. The user can add or remove the KEX client or server algorithms that the SSH application negotiates using an SSHv2 phase one handshake. The KEX list is an index list with the lower index having higher preference in the SSH negotiation. The lowest indexed algorithm in the list is negotiated first in SSH and is at the top of the negotiation list to the peer.

By default, the KEX list is empty and a hard-coded list that includes all supported algorithms in the following preference order is used:

1. kex 170 name ecdh-sha2-nistp521
2. kex 180 name ecdh-sha2-nistp384
3. kex 190 name ecdh-sha2-nistp256
4. kex 200 name diffie-hellman-group16-sha512

5. kex 210 name diffie-hellman-group14-sha256
6. kex 215 name diffie-hellman-group14-sha1
7. kex 220 name diffie-hellman-group-exchange-sha1
8. kex 225 name diffie-hellman-group1-sha1

As soon as an algorithm is configured in the KEX list, 7210 SAS starts using the user-defined KEX list instead of the hard-coded list. This means that all default KEX algorithms are removed and only the KEX algorithms configured by the user are negotiated. To go back to the hard-coded list, remove all configured KEX indexes until the list is empty.

Use the following CLI to configure the client and server KEX list.

Example

```
*A:Dut-A>config>system>security>ssh# client-kex-list kex
- kex <index> name <kex-name>
- no kex <index>

<index>          : [1..255]
<kex-name>       : diffie-hellman-group16-sha512|diffie-hellman-group14-sha256|
                  diffie-hellman-group14-sha1|diffie-hellman-group-exchange-sha1|
                  diffie-hellman-group1-sha1|ecdh-sha2-nistp256|ecdh-sha2-nistp384|
ecdh-sha2-nistp521

*A:Dut-A>config>system>security>ssh# server-kex-list kex
- kex <index> name <kex-name>
- no kex <index>

<index>          : [1..255]
<kex-name>       : diffie-hellman-group16-sha512|diffie-hellman-group14-sha256|
                  diffie-hellman-group14-sha1|diffie-hellman-group-exchange-sha1|
                  diffie-hellman-group1-sha1|ecdh-sha2-nistp256|ecdh-sha2-nistp384|
ecdh-sha2-nistp521
```

2.6.2.6 SSH host key algorithm list



Note:

The option to configure the host key algorithm lists are supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D.

When the SSH server is enabled, an SSH security key is generated. Unless the **perserve-key** command option is configured for SSH, the security key is only valid until the node is restarted or the SSH server is stopped and restarted. The 7210 SAS deprecated DSA from host keys from Release 25.9.R1 onward. The key size is non-configurable and set to 2048 for SSHv2 RSA.



Note:

On the 7210 SAS-D, the key size is non-configurable and set to 1024 for SSHv2 RSA, SSHv2 DSA, and SSHv1 RSA.

The 7210 SAS supports the following list of host key algorithms, which are negotiated for the SSH server and SSH client during the SSH handshake:

- ecdsa-sha2-nistp521

- ecdsa-sha2-nistp384
- ecdsa-sha2-nistp256
- rsa-sha2-512
- rsa-sha2-256
- ssh-ed25519
- ssh-rsa

The host key algorithm list is configurable for the server and the client, which allows the user to add or remove host key algorithms from the list. Use the following commands to configure the list:

```
configure system security ssh server-host-key-list
configure system security ssh client-host-key-list
```

The algorithm list is an index list, with the lower index having a higher preference in the SSH negotiation. That is, the lowest indexed algorithm in the list is at the top of the negotiation list and is negotiated first in the SSH handshake.



Note:

The time required to generate the host signature may vary depending on the CPU processing capacity. Host keys are generated during router bootup and increase the bootup time. To ensure an optimized bootup time, users must disable unwanted host keys.

After upgrading to a software release that supports the new host keys, the user may have to remove the known SSH host key files and database, because the SSH client may negotiate to a more secure and higher preference host key.

2.6.3 Exponential login back-off

A malicious user may attempt to gain CLI access by means of a dictionary attack, in which a script is used to attempt automatic logins as an “admin” user and a dictionary list is used to test all possible passwords. By using the exponential-backoff feature in the **config>system>login-control** context, the 7210 SAS increases the delay between login attempts exponentially to mitigate attacks.

When a user attempts to log into a router using a Telnet or an SSH session, the system allows a limited number of attempts to enter the correct password. The interval between the unsuccessful attempts change after each try (1, 2, and 4 seconds). If user lockout is configured on the system, the user is locked out when the number of unsuccessful attempts is exceeded.

However, if lockout is not configured, three password entry attempts are allowed in the first session after the first failure, at fixed 1, 2 and 4 second intervals, and then the session terminates. Users do not have an unlimited number of login attempts per session. After each failed password attempt, the wait period becomes longer until the maximum number of attempts is reached.

The 7210 SAS terminates after four unsuccessful attempts. A wait period is never longer than 4 seconds. The periods are fixed and restart in subsequent sessions.

The **config system login-control [no] exponential-backoff** command works in conjunction with the **config system security password attempts** command, which is also a system-wide configuration.

Example

```
*A:ALA-48>config>system# security password attempts
- attempts <count> [time <minutes1>] [lockout <minutes2>]
```

```
- no attempts

<count>           : [1..64]
<minutes1>        : [0..60]
<minutes2>        : [0..1440]
```

Exponential backoff applies to any user and by any login method, such as console, SSH, and Telnet.

See [Configuring login controls](#) for more information. The related commands are described in [Login](#), [Telnet](#), [SSH](#) and [FTP commands](#).

2.6.4 User logout

When a user exceeds the maximum number of attempts allowed (the default is three attempts) during a specific period of time (the default is 5 minutes) the account used during those attempts is locked out for a preconfigured lock-out period (the default is 10 minutes).

A security event log is generated as soon as a user account has exceeded the number of allowed attempts and the **show>system>security>user** command can be used to display the total number of failed attempts per user.

The account is automatically re-enabled as soon as the lock-out period has expired.

2.6.5 Encryption

Data Encryption Standard (DES) and Triple DES (3DES) are supported for encryption:

- DES is a widely-used method of data encryption using a private (secret) key. Both the sender and the receiver must know and use the same private key.
- 3DES is a more secure version of the DES protocol.

2.6.6 802.1x network access control

The 7210 SAS supports network access control of client devices (PCs, STBs, and so on.) on an Ethernet network using the IEEE. 802.1x standard. 802.1x is known as Extensible Authentication Protocol (EAP) over a LAN network or EAPOL.

2.6.7 TCP Enhanced Authentication Option

The TCP Enhanced Authentication Option, currently covered in *draft-bonica-tcp-auth-05.txt*, "Authentication for TCP-based Routing and Management Protocols", extends the previous MD5 authentication option to include the ability to change keys without tearing down the session, and allows for stronger authentication algorithms to be used.


The TCP Enhanced Authentication Option is a TCP extension that enhances security for BGP, LDP and other TCP-based protocols. This includes the ability to change keys in a BGP or LDP session seamlessly without tearing down the session. It is intended for applications where secure administrative access to both the end-points of the TCP connection is normally available.

TCP peers can use this extension to authenticate messages passed between one another. This strategy improves upon current practice, which is described in RFC 2385, Protection of BGP Sessions via the TCP MD5 Signature Option. Using this new strategy, TCP peers can update authentication keys during the lifetime of a TCP connection. TCP peers can also use stronger authentication algorithms to authenticate routing messages.

2.6.7.1 Packet formats

The following figure shows the TCP Enhanced Authentication Option packet format.

Figure 4: Packet format

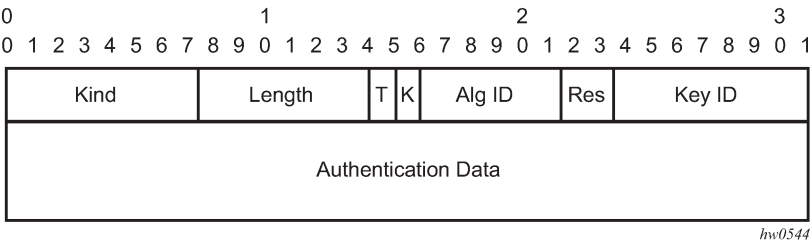

Option Syntax

- **Kind: 8 bits**
The Kind field identifies the TCP Enhanced Authentication Option. This value is assigned by IANA.
- **Length: 8 bits**
The Length field specifies the length of the TCP Enhanced Authentication Option, in octets. This count includes two octets representing the Kind and Length fields.
The valid range for this field is from 4 to 40 octets, inclusive.
For all algorithms specified in this memo, the value is 16 octets.
- **T-Bit: 1 bit**
The T-bit specifies whether TCP Options were omitted from the TCP header for the purpose of MAC calculation. A value of 1 indicates that all TCP options other than the Extended Authentication Option were omitted. A value of 0 indicates that TCP options were included.
The default value is 0.
- **K-Bit: 1 bit**
This bit is reserved for future enhancement. Its value MUST be equal to zero.
- **Alg ID: 6 bits**
The Alg ID field identifies the MAC algorithm.
- **Res: 2 bits**
These bits are reserved. They MUST be set to zero.
- **Key ID: 6 bits**
The Key ID field identifies the key that was used to generate the message digest.
- **Authentication Data: Variable length**

The Authentication Data field contains data that is used to authenticate the TCP segment. This data includes, but need not be restricted to, a MAC. The length and format of the Authentication Data Field can be derived from the Alg ID.

The Authentication for TCP-based Routing and Management Protocols draft provides an overview of the TCP Enhanced Authentication Option. The details of this feature are described in *draft-bonica-tcp-auth-04.txt*.

2.6.7.2 Keychain

A keychain is a set of up to 64 keys, where each key is {A[i], K[i], V[i], S[i], T[i], S'[i], T'[i]} as described in *draft-bonica-tcp-auth-05.txt*, "Authentication for TCP-based Routing and Management Protocols". The keys can be assigned to both sides of an LDP peer. The individual keys in a keychain have a begin-time and end-time indicating when to use this key.

These fields map to the CLI tree as described in the following figure.

Table 17: Keychain mapping

Field	Definition	CLI
i	The key identifier expressed as an integer (0...63)	config>system>security>keychain>direction>bi>entry config>system>security>keychain>direction>uni>receive>entry config>system>security>keychain>direction>uni>send>entry
A[i]	Authentication algorithm to use with key[i]	config>system>security>keychain>direction>bi>entry with algorithm <i>algorithm</i> parameter. config>system>security>keychain>direction>uni>receive>entry with algorithm <i>algorithm</i> parameter. config>system>security>keychain>direction>uni>send>entry with algorithm <i>algorithm</i> parameter.
K[i]	Shared secret to use with key[i].	config>system>security>keychain>direction>uni>receive>entry with shared secret parameter config>system>security>keychain>direction>uni>send>entry with shared secret parameter config>system>security>keychain>direction>bi>entry with shared secret parameter
V[i]	A vector that determines whether the key[i] is to be used to generate MACs for inbound segments, outbound segments, or both.	config>system>security>keychain>direction
S[i]	Start time from which key[i] can be used by sending TCPs.	config>system>security>keychain>direction>bi>entry>begin-time

Field	Definition	CLI
		config>system>security>keychain>direction>uni>send>entry >begin-time
T[i]	End time after which key[i] cannot be used by sending TCPs.	Inferred by the begin-time of the next key (youngest key rule).
S'[i]	Start time from which key[i] can be used by receiving TCPs.	config>system>security>keychain>direction>bi>entry>begin-time config>system>security>keychain>direction>bi>entry>tolerance config>system>security>keychain>direction>uni>receive>entry >begin-time config>system>security>keychain>direction>uni>receive>entry >tolerance
T'[i]	End time after which key[i] cannot be used by receiving TCPs	config>system>security>keychain>direction>uni>receive>entry >end-time

2.7 Configuration notes

This section describes security configuration restrictions.

2.7.1 General

- If a RADIUS or a TACACS+ server is not configured, password, profiles, and user access information must be configured on each router in the domain.
- If a RADIUS authorization is enabled, VSAS must be configured on the RADIUS server.

2.8 Configuring security with CLI

This section provides information to configure security using the command line interface.

2.8.1 Setting up security attributes

This section provides a brief overview of the tasks that must be performed to configure security and provides the CLI commands. The following table describes the capabilities of authentication, authorization, and accounting configurations. For example, authentication can be enabled locally and on RADIUS and TACACS+ servers. Authorization can be executed locally, on a RADIUS server, or on a TACACS+ server. Accounting can be performed on a RADIUS or TACACS+ server.

Table 18: Security configuration requirements

Authentication	Authorization	Accounting
Local	Local	None
RADIUS	Local and RADIUS	RADIUS
TACACS+	Local	TACACS+

2.8.1.1 Configuring authentication

See the following sections to configure authentication:

- Local authentication
 - [Configuring password management parameters](#)
 - [Configuring profiles](#)
 - [Configuring users](#)
- RADIUS authentication (only)

By default, authentication is enabled locally. Perform the following tasks to configure security on each participating router:

 - [Configuring profiles](#)
 - [Configuring RADIUS authentication](#)
 - [Configuring users](#)
- RADIUS authentication

To implement only RADIUS authentication, with authorization, perform the following tasks on each participating router:

 - [Configuring RADIUS authentication](#)
 - [Configuring RADIUS authorization](#)
- TACACS+ authentication

To implement only TACACS+ authentication, perform the following tasks on each participating router:

 - [Configuring profiles](#)
 - [Configuring users](#)
 - [Enabling TACACS+ authentication](#)

2.8.1.2 Configuring authorization

See the following sections to configure authorization:

- Local authorization

For local authorization, configure these tasks on each participating router:

 - [Configuring profiles](#)

- [Configuring users](#)
- RADIUS authorization (only)
For RADIUS authorization (without authentication), configure these tasks on each participating router:
 - [Configuring RADIUS authorization](#)
 - [Configuring profiles](#)For RADIUS authorization, VSAS must be configured on the RADIUS server. See [RADIUS VSAs](#).
- RADIUS authorization
For RADIUS authorization (with authentication), configure these tasks on each participating router:
 - [Configuring RADIUS authorization](#)For RADIUS authorization, VSAS must be configured on the RADIUS server. See [RADIUS VSAs](#).
 - [Configuring RADIUS authentication](#)
 - [Configuring profiles](#)
- TACACS+ authorization (only)
For TACACS+ authorization (without authentication), configure these tasks on each participating router:
 - [Configuring TACACS+ authorization](#)
- TACACS+ authorization
For TACACS+ authorization (with authentication), configure these tasks on each participating router:
 - [Enabling TACACS+ authentication](#)
 - [Configuring TACACS+ authorization](#)

2.8.1.3 Configuring accounting

See the following sections to configure accounting.

- Local accounting is not implemented. For information about configuring accounting policies, see [Configuring logging with CLI](#)
- [Configuring RADIUS accounting](#)
- [Configuring TACACS+ accounting](#)

2.8.2 Security configurations

This section provides information to configure security and configuration examples of configuration tasks.

To implement security features, configure the following components:

- management access filters
- profiles
- user access parameters
- password management parameters
- enable RADIUS and/or TACACS+

- one to five RADIUS and/or TACACS+ servers
- RADIUS and/or TACACS+ parameters

Example: Default values for security parameters

```
A:ALA-1>config>system>security# info detail
-----
no hash-control
telnet-server
no telnet6-server
no ftp-server
management-access-filter
exit
profile "default"
default-action none
no li
entry 10
no description
match "exec"
action permit
...
password
authentication-order radius tacplus local
no aging
minimum-length 6
attempts 3 time 5 lockout 10
complexity
exit
user "admin"
password "./3kQWERTYn0Q6w" hash
access console
no home-directory
no restricted-to-home
console
no login-exec
no cannot-change-password
no new-password-at-login
member "administrative"
exit
exit
snmp
view iso subtree 1
mask ff type included
exit
...
access group snmp-ro security-model snmpv1 security-level no-auth-no\
privacy read no-security notify no-security
access group snmp-ro security-model snmpv2c security-level no-auth-no
privacy read no-security notify no-security
access group snmp-rw security-model snmpv1 security-level no-auth-no
privacy read no-security write no-security notify no-security
access group snmp-rw security-model snmpv2c security-level no-auth-no
privacy read no-security write no-security notify no-security
access group snmp-rwa security-model snmpv1 security-level no-auth-no
privacy read iso write iso notify iso
access group snmp-rwa security-model snmpv2c security-level no-auth-no
privacy read iso write iso notify iso
access group snmp-trap security-model snmpv1 security-level no-auth-no
privacy notify iso
access group snmp-trap security-model snmpv2c security-level no-auth-no
privacy notify iso
access group cli-readonly security-model snmpv2c security-level
```

```
no-auth-no-privacy read iso notify iso
access group cli-readwrite security-model snmpv2c security-level
no-auth-no-privacy read iso write iso notify iso
attempts 20 time 5 lockout 10
exit
no ssh
```

2.8.3 Security configuration procedures

2.8.3.1 Configuring Management Access Filters

Creating and implementing management access filters is optional. Management access filters control all traffic going in to the CPM, including all routing protocols. They apply to packets from all ports. The filters can be used to restrict management of the 7210 SAS router by other nodes outside either specific (sub)networks or through designated ports. By default, there are no filters associated with security options. The management access filter and entries must be explicitly created on each router. These filters also apply to the management Ethernet port.

The 7210 SAS implementation exits the filter when the first match is found and execute the actions according to the specified action. For this reason, entries must be sequenced correctly from most to least explicit.

An entry may not have any match criteria defined (in which case, everything matches) but must have at least the one keyword to be considered complete. Entries without the action keyword are considered incomplete and are rendered inactive.

Use the following syntax to configure a management access filter. This example only accepts packets matching the criteria specified in entries 1 and 2. Non-matching packets are denied.

```
config>system
  security
    management-access-filter
      default-action {permit|deny|deny-host-unreachable}
      renum old-entry-number new-entry-number
      no shutdown
      entry entry-id
        description description-string
        src-port {port-id cpm|laglag-id}
        src-ip {ip-prefix/mask | ip-prefix netmask}
        protocol protocol-id
        dst-port port [mask]
        action {permit|deny|deny-host-unreachable}
        log
```

2.8.3.2 Configuring password management parameters

Password management parameters consists of defining aging, the authentication order and authentication methods, password length and complexity, as well as the number of attempts a user can enter a password.

Depending on the your authentication requirements, password parameters are configured locally.

Use the following syntax to configure password support.

```
config>system>security
```

```
password
  admin-password password [hash|hash2]
  aging days
  attempts count [time minutes1] [lockout minutes2]
  authentication-order [method-1] [method-2] [method-3] [exit-on-reject]
  complexity-rules
    allow-user-name
    credits [lowercase credits] [uppercase credits] [numeric credits] [special-
character credits]
    minimum-classes minimum
    minimum-length length
    repeated-characters count
    required [lowercase count] [uppercase count] [numeric count] [special-
character count]
  hashing {bcrypt|sha2-pbkdf2}
  health-check [interval interval]
  history-size size
  minimum-age [days days] [hrs hours] [min minutes] [sec seconds]
  minimum-change distance
```

Example: Password configuration output

```
A:ALA-1>config>system>security# info
-----
password
authentication-order radius tacplus local
aging 365
minimum-length 8
attempts 5 time 5 lockout 20
exit
-----
A:ALA-1>config>system>security#
```

2.8.3.3 Configuring profiles

Profiles are used to deny or permit access to a hierarchical branch or specific commands. Profiles are referenced in a user configuration. A maximum of sixteen user profiles can be defined. A user can participate in up to sixteen profiles. Depending on the authorization requirements, passwords are configured locally or on the RADIUS server.

Use the following syntax to configure user profiles.

```
config>system>security
  profile user-profile-name
    default-action {deny-all|permit-all|none}
    renum old-entry-number new-entry-number
    entry entry-id
      description description-string
      match command-string
      action {permit|deny}
```

Example: User profile output

```
A:ALA-1>config>system>security# info
-----
...
    profile "ghost"
      default-action permit-all
      entry 1
```

```

        match "configure"
        action permit
    exit
    entry 2
        match "show"
    exit
    entry 3
        match "exit"
    exit
exit
...
-----
A:ALA-1>config>system>security#

```

2.8.3.4 Configuring users

Configure access parameters for individual users. For user, define the login name for the user and, optionally, information that identifies the user. Use the following syntax to configure RADIUS support.

```

config>system>security
  user-template template-name
  user user-name
  access [ftp] [snmp] [console]
  console
  cannot-change-password
  login-exec url-prefix:source-url
  member user-profile-name [user-profile-name...(up to 8 max)]
  new-password-at-login
  home-directory url-prefix [directory][directory/directory ...]
  password [password] [hash|hash2]
  restricted-to-home
  snmp
  authentication {[none]}[[hash] {md5 key-1|sha key-1} privacy {none|des-key key-2}}
  group group-name

```

Example: User configuration output

```

A:ALA-1>config>system>security# info
-----
...
    user "49ers"
        password "qQbnuzLd7H/VxGdUqdh7bE" hash2
        access console ftp snmp
        restricted-to-home
        console
            member "default"
            member "ghost"
        exit
    exit
...
-----
A:ALA-1>config>system>security#

```

2.8.3.5 Configuring keychains

Example: Keychain configuration output

```
A:ALA-1>config>system>security# info
-----
...
    keychain "abc"
        direction
            bi
                entry 1 key "ZcvSElJzJx/wBZ9biCt0VQJ9YZQvVU.S" hash2 alg
algorithm aes-128-cmac-96
                begin-time 2006/12/18 22:55:20
                exit
            exit
        exit
    keychain "baSASd"
        direction
            uni
                receive
                    entry 1 key "Ee7xdKlY02D0m7v3IJv/84LIu96R2fZh" hash2
algorithm aes-128-cmac-96
                    tolerance forever
                exit
            exit
        exit
    exit
exit
...
-----
A:ALA-1>config>system>security#
```

2.8.3.6 Copying and overwriting users and profiles

You can copy a profile or user or overwrite an existing profile or user. The **overwrite** option must be specified or an error occurs if the destination profile or username already exists.

2.8.3.6.1 User

Use the following syntax to configure copied users.

```
config>system>security# copy {user source-user | profile source-profile}
to destination [overwrite]
```

Example

```
config>system>security# copy user testuser to testuserA
MINOR: CLI User "testuserA" already exists - use overwrite flag.
config>system>security#
config>system>security# copy user testuser to testuserA overwrite
config>system>security#
```

Example: Copied user configuration output

```
A:ALA-12>config>system>security# info
-----
...
        user "testuser"
            password "F6XjryaATzM" hash
            access snmp
            snmp
                authentication hash md5 e14672e71d3e96e7a1e19472527ee969 privacy
none
            group "testgroup"
            exit
        exit
        user "testuserA"
            password "" hash2
            access snmp
            console
            new-password-at-login
            exit
            snmp
                authentication hash md5 e14672e71d3e96e7a1e19472527ee969 privacy
none
            group "testgroup"
            exit
        exit
...
-----
A:ALA-12>config>system>security# info
```

Example

The cannot-change-password flag is not replicated when a copy user command is performed. A new-password-at-login flag is created instead.

```
A:ALA-12>config>system>security>user# info
-----
password "F6XjryaATzM" hash
access snmp
console
cannot-change-password
exit
snmp
authentication hash md5 e14672e71d3e96e7a1e19472527ee969 privacy none
group "testgroup"
exit
-----
A:ALA-12>config>system>security>user# exit
A:ALA-12>config>system>security# user testuserA
A:ALA-12>config>system>security>user# info
-----
password "" hash2
access snmp
console
new-password-at-login
exit
snmp
authentication hash md5 e14672e71d3e96e7a1e19472527ee969 privacy none
group "testgroup"
exit
-----
A:ALA-12>config>system>security>user#
```

2.8.3.6.2 Profile

```
config>system>security# copy {user source-user | profile source-profile}  
to destination [overwrite]
```

Example

```
config>system>security# copy profile default to testuser
```

Example: Copied profile output

```
A:ALA-49>config>system>security# info  
-----  
...  
A:ALA-49>config>system>security# info detail  
-----  
...  
        profile "default"  
            default-action none  
            entry 10  
                no description  
                match "exec"  
                action permit  
            exit  
            entry 20  
                no description  
                match "exit"  
                action permit  
            exit  
            entry 30  
                no description  
                match "help"  
                action permit  
            exit  
            entry 40  
                no description  
                match "logout"  
                action permit  
            exit  
            entry 50  
                no description  
                match "password"  
                action permit  
            exit  
            entry 60  
                no description  
                match "show config"  
                action deny  
            exit  
            entry 70  
                no description  
                match "show"  
                action permit  
            exit  
            entry 80  
                no description  
                match "enable-admin"  
                action permit  
            exit  
        exit
```

```
profile "testuser"
  default-action none
  entry 10
    no description
    match "exec"
    action permit
  exit
  entry 20
    no description
    match "exit"
    action permit
  exit
  entry 30
    no description
    match "help"
    action permit
  exit
  entry 40
    no description
    match "logout"
    action permit
  exit
  entry 50
    no description
    match "password"
    action permit
  exit
  entry 60
    no description
    match "show config"
    action deny
  exit
  entry 70
    no description
    match "show"
    action permit
  exit
  entry 80
    no description
    match "enable-admin"
    action permit
  exit
exit
profile "administrative"
  default-action permit-all exit
...
-----
A:ALA-12>config>system>security#
```

2.8.3.7 Enabling SSH

Use the SSH command to configure the SSH server as SSH1, SSH2 or both. The default is SSH2 (SSH version 2). This command should only be enabled or disabled when the SSH server is disabled. This setting should not be changed while the SSH server is running because the actual change only takes place after SSH is disabled or enabled. Use the following syntax to configure SSH.

```
config>system>security
  ssh
    preserve-key
    no server-shutdown
```



```
version ssh-version
```

Example

The following is a sample SSH server configuration output as both SSH and SSH2 using a host-key.

```
A:siml>config>system>security>ssh# info
-----
                preserve-key
                version 1-2
-----
A:siml>config>system>security>ssh#
```

2.8.4 RADIUS configurations

2.8.4.1 Configuring RADIUS authentication

RADIUS is disabled by default and must be explicitly enabled. The mandatory commands to enable RADIUS on the local router are **radius** and **server server-index address ip-address secret key**.

The system IP address must be configured in order for the RADIUS client to work. See "Configuring a System Interface" in the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Router Configuration Guide*.

The other commands are optional. The server command adds a RADIUS server and configures the RADIUS server's IP address, index, and key values. The index determines the sequence in which the servers are queried for authentication requests.

On the local router, use the following syntax to configure RADIUS authentication.

```
config>system>security
  radius
    port port
    retry count
    server server-index address ip-address secret key
    timeout seconds
    no shutdown
```

Example: RADIUS authentication configuration output

```
A:ALA-1>config>system>security# info
-----
                retry 5
                timeout 5
                server 1 address 10.10.10.103 secret "test1"
                server 2 address 10.10.0.1 secret "test2"
                server 3 address 10.10.0.2 secret "test3"
                server 4 address 10.10.0.3 secret "test4"
                ...
-----
A:ALA-1>config>system>security#
```

2.8.4.2 Configuring RADIUS authorization

In order for RADIUS authorization to function, RADIUS authentication must be enabled first. See [Configuring RADIUS authentication](#).

In addition to the local configuration requirements, VSAS must be configured on the RADIUS server. See [RADIUS VSAs](#).

On the local router, use the following syntax to configure RADIUS authorization.

```
config>system>security
      radius
        authorization
```

Example: RADIUS authorization configuration output

```
A:ALA-1>config>system>security# info
-----
...
      radius
        authorization
        retry 5
        timeout 5
        server 1 address 10.10.10.103 secret "test1"
        server 2 address 10.10.0.1 secret "test2"
        server 3 address 10.10.0.2 secret "test3"
        server 4 address 10.10.0.3 secret "test4"
      exit
...
-----
A:ALA-1>config>system>security#
```

2.8.4.3 Configuring RADIUS accounting

On the local router, use the following syntax to configure RADIUS accounting:

```
config>system>security
      radius
        accounting
```

Example: RADIUS accounting configuration output

```
A:ALA-1>config>system>security# info
-----
...
      radius
        shutdown
        authorization
        accounting
        retry 5
        timeout 5
        server 1 address 10.10.10.103 secret "test1"
        server 2 address 10.10.0.1 secret "test2"
        server 3 address 10.10.0.2 secret "test3"
        server 4 address 10.10.0.3 secret "test4"
      exit
...
-----
```

```
-----  
A:ALA-1>config>system>security#
```

2.8.4.4 Configuring 802.1x RADIUS policies

Use the following CLI commands to configure generic authentication parameters for clients using 802.1x EAPOL. Additional parameters are configured per Ethernet port. See the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Interface Configuration Guide*.

To configure generic parameters for 802.1x authentication, enter the following syntax.

```
config>system>security  
  dot1x  
    radius-plcy policy-name  
      server server-index address ip-address secret key [port port]  
      source-address ip-address  
      no shutdown
```

Example: 802.1x configuration output

```
A:ALA-1>config>system>security# info  
-----  
      dot1x  
        radius-plcy "dot1x_plcy" create  
          server 1 address 10.1.1.1 port 65535 secret "a"  
          server 2 address 10.1.1.2 port 6555 secret "a"  
          source-address 10.1.1.255  
          no shutdown  
      ...  
-----
```

2.8.5 TACACS+ configurations

2.8.5.1 Enabling TACACS+ authentication

To use TACACS+ authentication on the router, configure one or more TACACS+ servers on the network.

Use the following syntax to configure profiles.

```
config>system>security  
  tacplus  
    server server-index address ip-address secret key  
    timeout seconds  
    no shutdown
```

Example: TACACS+ authentication configuration output

```
A:ALA-1>config>system>security>tacplus# info  
-----  
      timeout 5  
      server 1 address 10.10.0.5 secret "test1"  
      server 2 address 10.10.0.6 secret "test2"  
      server 3 address 10.10.0.7 secret "test3"  
      server 4 address 10.10.0.8 secret "test4"
```

```
server 5 address 10.10.0.9 secret "test5"
-----
A:ALA-1>config>system>security>tacplus#
```

2.8.5.2 Configuring TACACS+ authorization

In order for TACACS+ authorization to function, TACACS+ authentication must be enabled first. See [Enabling TACACS+ authentication](#).

On the local router, use the following syntax to configure RADIUS authorization.

```
config>system>security
tacplus
authorization
no shutdown
```

Example: TACACS+ authorization configuration output

```
A:ALA-1>config>system>security>tacplus# info
-----
authorization
timeout 5
server 1 address 10.10.0.5 secret "test1"
server 2 address 10.10.0.6 secret "test2"
server 3 address 10.10.0.7 secret "test3"
server 4 address 10.10.0.8 secret "test4"
server 5 address 10.10.0.9 secret "test5"
-----
A:ALA-1>config>system>security>tacplus#
```

2.8.5.3 Configuring TACACS+ accounting

On the local router, use the following syntax to configure TACACS+ accounting.

```
config>system>security
tacplus
accounting
```

Example: TACACS+ accounting configuration output

```
A:ALA-1>config>system>security>tacplus# info
-----
accounting
authorization
timeout 5
server 1 address 10.10.0.5 secret "test1"
server 2 address 10.10.0.6 secret "test2"
server 3 address 10.10.0.7 secret "test3"
server 4 address 10.10.0.8 secret "test4"
server 5 address 10.10.0.9 secret "test5"
-----
A:ALA-1>config>system>security>tacplus#
```

2.8.6 Configuring login controls

Configure login control parameters for console, Telnet, and FTP sessions.

Use the following syntax to configure login controls.

```
config>system
  login-control
    exponential-backoff
    ftp
      inbound-max-sessions value
    telnet
      inbound-max-sessions value
      outbound-max-sessions value
      idle-timeout {minutes |disable}
      pre-login-message login-text-string [name]
      login-banner
      motd {url url-prefix: source-url|text motd-text-string}
```

Example: Login control configuration output

```
A:ALA-1>config>system# info
-----
...
  login-control
    ftp
      inbound-max-sessions 5
    exit
    telnet
      inbound-max-sessions 7
      outbound-max-sessions 2
    exit
    idle-timeout 1440
    pre-login
message "Property of Service Routing Inc. Unauthorized access prohibited."
  motd text "Notice to all users: Software upgrade scheduled 3/2 1:00 AM"
  exit
no exponential-backoff
...
-----
A:ALA-1>config>system#
```

2.9 Security command reference

2.9.1 Command hierarchies

- [Configuration commands](#)
 - [Security commands](#)
 - [Management Access Filter commands](#)
 - [Security password commands](#)
 - [Profile commands](#)

- RADIUS commands
- SSH commands
- TACPLUS commands
- User commands
- User template commands
- Dot1x commands
- Keychain commands
- Login control commands
- IPsec commands
- Show commands
 - Security commands
 - Login control commands
- Clear commands
- Debug commands

2.9.1.1 Configuration commands

2.9.1.1.1 Security commands

```
config
- system
- security
- copy {user source-user | profile source-profile} to destination [overwrite]
- dot1x
- [no] ftp-server
- hash-control [read-version {1 | 2 | all}] [write-version {1 | 2}]
- no hash-control
- [no] keychain keychain-name
- management-access-filter
- password
- [no] profile user-profile-name
- [no] radius
- snmp
- source-address
- application app [ip-int-name|ip-address]
- no application app
- ssh
- [no] tacplus
- telnet
- listening-port port
- no listening-port
- [no] telnet-server
- [no] telnet6-server
- [no] users user-name
- user-template {tacplus_default | radius_default}
```

2.9.1.1.2 Management Access Filter commands



Note:

IPv6 management access filters are supported on all platforms as described in this document, except the 7210 SAS-K 2F1C2T.

```
config
- system
- security
- [no] management-access-filter
- [no] ip-filter
- default-action {permit | deny | deny-host-unreachable}
- [no] entry entry-id
- action {permit | deny | deny-host-unreachable}
- no action
- description description-string
- no description
- dst-port port [mask]
- no dst-port
- fragment {true | false}
- no fragment
- l4-src-port port [mask]
- no l4-src-port
- [no] log
- protocol protocol-id
- no protocol
- router router-instance
- no router
- [no] src-ip {ip-address/mask | ip-address ipv4-address-mask | ip-
prefix-list prefix-list-name}
- src-port {port-id | lag lag-id}
- no src-port
- [no] ipv6-filter
- default-action {permit | deny | deny-host-unreachable}
- [no] entry entry-id
- action {permit | deny | deny-host-unreachable}
- no action
- description description-string
- no description
- dst-port [mask]
- no dst-port
- flow-label value
- no flow-label
- l4-src-port port [mask]
- no l4-src-port
- [no] log
- next-header next-header
- no port
- router router-instance
- no router
- src-ip ipv6-address/prefix-length
- src-ip ipv6-prefix-list ipv6-prefix-list-name
- no src-ip
- src-port {port-id | lag lag-id}
- no src-port
- renum old-entry-number new-entry-number
- [no] shutdown
```

2.9.1.1.3 Security password commands

```
config
- system
- security
- password
- admin-password password [hash | hash2]
- no admin-password
- aging days
- no aging
- attempts count [time minutes1] [lockout minutes2]
- no attempts
- authentication-order [method-1] [method-2] [method-3] [exit-on-reject]
- no authentication-order
- complexity-rules
- [no] allow-user-name
- credits [lowercase credits] [uppercase credits] [numeric credits]
[special-character credits]
- no credits
- minimum-classes minimum
- no minimum-classes
- minimum-length length
- no minimum-length
- repeated-characters count
- no repeated-characters
- required [lowercase count] [uppercase count] [numeric count] [special-
character count]
- no required
- hashing {bcrypt | sha2-pbkdf2}
- [no] health-check [interval interval]
```

2.9.1.1.4 Profile commands

```
config
- system
- security
- [no] profile user-profile-name
- default-action {deny-all | permit-all | none}
- [no] entry entry-id
- action {deny | permit}
- description description-string
- no description
- match command-string
- no match
- renum old-entry-number new-entry-number
```

2.9.1.1.5 RADIUS commands

```
config
- system
- security
- [no] radius
- [no] accounting
- accounting-port port
- no accounting-port
- [no] authorization
```



```
- port port
- no port
- retry count
- no retry
- server server-index address ip-address secret key [hash | hash2] [tls-client-
profile profile]
- no server server-index
- [no] shutdown
- timeout seconds
- no timeout
- [no] use-default-template
```

2.9.1.1.6 SSH commands

```
config
- system
- security
- ssh
- client-cipher-list
- cipher index name cipher-name
- no cipher index
- client-host-key-list
- host-key index name host-key-name
- [no] host-key index
- client-mac-list
- mac index name mac-name
- no mac index
- client-kex-list
- kex index name kex-name
- no kex index
- listening-port port
- no listening-port
- [no] permit-empty-passwords
- [no] preserve-key
- server-cipher-list
- cipher index name cipher-name
- no cipher index
- server-host-key-list
- host-key index name host-key-name
- [no] host-key index
- server-kex-list
- kex index name kex-name
- no kex index
- server-mac-list
- mac index name mac-name
- no mac index
- [no] server-shutdown
- [no] version SSH-version
```

2.9.1.1.7 TACPLUS commands

```
config
- system
- security
- [no] tacplus
- accounting [record-type {start-stop | stop-only}]
- no accounting
- [no] authorization
```

```
- server server-index address ip-address secret key [hash | hash2] [port port]
- no server server-index
- [no] service-request
  - [no] nokia-netconf-base-op-authorization
  - [no] nokia-user
- [no] shutdown
- timeout seconds
- no timeout
- [no] use-default-template
```

2.9.1.1.8 User commands

```
config
- system
  - security
    - [no] users user-name
    - [no] access [ftp] [snmp] [console] [scp-sftp] [console-port-cli] [ssh-cli]
    [telnet-cli] [netconf]
    - console
      - [no] cannot-change-password
      - login-exec url-prefix::source-url
      - no login-exec
      - member user-profile-name [user-profile-name...(up to 8 max)]
      - no member user-profile-name
      - [no] new-password-at-login
    - home-directory url-prefix [directory][directory/directory ..]
    - no home-directory
    - password [password] [hash | hash2]
    - public-keys
      - ecdsa
        - ecdsa-key ecdsa-public-key-id [create]
        - no ecdsa-key ecdsa-public-key-id
          - description description-string
          - no description
          - key-value ecdsa-public-key-value
          - no key-value
      - rsa
        - rsa-key rsa-public-key-id [create]
        - no rsa-key rsa-public-key-id
          - description description-string
          - no description
          - key-value rsa-public-key-value
          - no key-value
    - [no] restricted-to-home
    - [no] save-when-restricted
    - snmp
      - authentication none
      - authentication authentication authentication-protocol key-1 [privacy
none] [hash | hash2]
      - authentication authentication authentication-protocol key-1
privacy privacy-protocol key-2 [hash | hash2]
      - no authentication
      - authentication none
      - authentication {md5 key-1 | sha key-1} [privacy none] [hash]
      - authentication {md5 key-1 | sha key-1} privacy privacy-level key-2 [hash]
      - no authentication
      - group group-name
      - no group
```

2.9.1.1.9 User template commands

```
config
- system
- security
- user-template {tacplus_default | radius_default}
- [no] access [ftp] [console] [scp-sftp] [console-port-cli] [ssh-cli] [telnet-
cli]
- console
- login-exec url-prefix:source-url
- no login-exec
- profile user-profile-name
- no profile
- home-directory url-prefix [directory][directory/directory..]
- no home-directory
- [no] restricted-to-home
- [no] save-when-restricted
```

2.9.1.1.10 Dot1x commands

```
config
- system
- security
- dot1x
- radius-pty name [create]
- retry count
- no retry
- server server-index address ip-address secret key [hash|hash2] [auth-
port auth-port] [acct-port acct-port] [type server-type]
- source-address ip-address
- [no] shutdown
- timeout seconds
- no timeout
- [no] shutdown
```

2.9.1.1.11 Keychain commands

```
config
- system
- security
- [no] keychain keychain-name
- description description-string
- no description
- direction {uni | bi}
- bi
- entry entry-id [key authentication-key | hash-key | hash2-key [hash |
hash2] algorithm algorithm]
- no entry {null-key | entry-id}
- begin-time [date] [hours-minutes] [UTC] {now| forever}
- [no] shutdown
- tolerance [seconds | forever]
- uni
- receive
- entry entry-id [key authentication-key | hash-key | hash2-key
[hash | hash2] algorithm algorithm]
- no entry {null-key | entry-id}
```

```
- begin-time [date] [hours-minutes] [UTC] {now| forever}
- end-time [date][hours-minutes] [UTC] {now| forever}
- [no] shutdown
- tolerance [seconds | forever]
- send
  - entry entry-id [key authentication-key | hash-key | hash2-key
[hash | hash2] algorithm algorithm]
  - begin-time [date] [hours-minutes] [UTC] {now| forever}
  - [no] shutdown
- [no] shutdown
- tcp-option-number
  - receive option-number
  - send option-number
```

2.9.1.1.12 Login control commands

```
config
- system
  - login-control
    - [no] exponential-backoff
    - ftp
      - inbound-max-sessions value
      - no inbound-max-sessions
    - idle-timeout {minutes | disable}
    - no idle-timeout
    - [no] login-banner
    - motd {url url-prefix: source-url | text motd-text-string}
    - no motd
    - pre-login-message login-text-string [name]
    - no pre-login-message
    - ssh
      - disable-graceful-shutdown
      - inbound-max-sessions
      - outbound-max-sessions
    - telnet
      - enable-graceful-shutdown
      - inbound-max-sessions value
      - no inbound-max-sessions
      - outbound-max-sessions value
      - no outbound-max-sessions
```

2.9.1.1.13 IPsec commands

```
config
- ipsec
  - static-sa sa-name
  - no static-sa
    - authentication auth-algorithm ascii-key ascii-string
    - authentication auth-algorithm hex-key hex-string [hash | hash2]
    - no authentication
    - description description-string
    - no description
    - direction ipsec-direction
    - no direction
    - protocol ipsec-protocol
    - no protocol
    - spi spi
```

```
- no spi
```

2.9.1.2 Show commands

2.9.1.2.1 Security commands

```
show
- system
  - security
    - access-group [group-name]
    - authentication [statistics]
    - keychain [key-chain] [detail]
    - management-access-filter
      - ip-filter [entry entry-id]
      - ipv6-filter [entry entry-id]
    - password-options
    - profile [user-profile-name]
    - source-address
    - ssh client-lists
    - ssh server-lists
    - ssh
    - user [user-id] [detail]
    - view [view-name] [detail]
```

2.9.1.2.2 Login control commands

```
show
- users
```

2.9.1.3 Clear commands

```
admin
- user user-name
  - lockout
```

2.9.1.4 Debug commands

```
debug
- router
  - radius
  - no radius
    - detail-level {low | medium | high}
    - no detail-level
    - packet-type [authentication] [accounting] [coa]
    - no packet-type
    - radius-attr type attribute-type [transaction]
    - radius-attr type attribute-type [transaction] {address | hex | integer | string}
value attribute-value
```

```
- radius-attr vendor vendor-id type attribute-type [transaction]
[encoding encoding-type]
- radius-attr vendor vendor-id type attribute-type [transaction]
[encoding encoding-type] {address | hex | integer | string} value attribute-value
- no radius-attr type attribute-type
- no radius-attr type attribute-type {address | hex | integer | string}
value attribute-value
- no radius-attr vendor vendor-id type attribute-type
- no radius-attr vendor vendor-id type attribute-type {address | hex | integer |
string} value attribute-value
- server-address ip-address
- no server-address ip-address
```

2.9.2 Command descriptions

- [Configuration commands](#)
- [Show commands](#)
- [Debug commands](#)

2.9.2.1 Configuration commands

- [General security commands](#)
- [Login, Telnet, SSH and FTP commands](#)
- [Management Access Filter commands](#)
- [Password commands](#)
- [Profile management commands](#)
- [User management commands](#)
- [RADIUS client commands](#)
- [TACACS+ client commands](#)
- [Generic 802.1x commands](#)
- [TCP Enhanced Authentication commands](#)

2.9.2.1.1 General security commands

description

Syntax

description *description-string*

no description

Context

config>system>security>mgmt-access-filter>ip-filter>entry

```
config>system>security>mgmt-access-filter>ipv6-filter>entry
config>sys>security>keychain>direction>bi>entry
config>system>security>keychain>direction>uni>receive>entry
config>system>security>keychain>direction>uni>send>entry
config>system>security>user>public-keys>ecdsa>ecdsa-key
config>system>security>user>public-keys>rsa>rsa-key
config>system>security>pki>ca-profile
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command associates a text string with a configuration context to help identify the context in the configuration file.

The **no** form of this command removes the string.

Parameters

string

Specifies the description character string. Allowed values are any string up to 80 characters composed of printable, 7-bit ASCII characters. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed within double quotes.

shutdown

Syntax

[no] shutdown

Context

```
config>system>security>mgmt-access-filter
config>system>security>keychain>direction>bi>entry
config>system>security>keychain>direction>uni>receive>entry
config>system>security>keychain>direction>uni>send>entry
config>system>security>tls>cert-profile
config>system>security>tls>client-tls-profile
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

The **shutdown** command administratively disables the entity. When disabled, an entity does not change, reset, or remove any configuration settings or statistics. Many entities must be explicitly enabled using the **no shutdown** command. The operational state of the entity is disabled as well as the operational state of any entities contained within. Many objects must be shut down before they may be deleted.

The **no** form of this command puts an entity into the administratively enabled state.

Default

no shutdown

security

Syntax

security

Context

config>system

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure security settings.

Security commands manage user profiles and user membership. Security commands also manage user login registrations.

ftp-server

Syntax

[no] **ftp-server**

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables FTP servers running on the system.

FTP servers are disabled by default. At system startup, only SSH servers are enabled.
The **no** form of this command disables FTP servers running on the system.

hash-control

Syntax

hash-control [read-version {1 | 2 | all}] [write-version {1 | 2}]
no hash-control

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

If the user executes a **save** or **info** command, the system encrypts all passwords, for example, MD5 keys, for security reasons. At present, two algorithms exist.

The first algorithm is a simple, short key that can be copied and pasted in a different location when the user wants to configure the same password. However, because it is the same password and the hash key is limited to the password/key, even the casual observer will notice that it is the same key.

The second algorithm is a more complex key, and cannot be copied and pasted in different locations in the configuration file. In this case, if the same key or password is used repeatedly in different contexts, each encrypted (hashed) version is different.

Default

hash-control read-version all

Parameters

read-version {1 | 2 | all}

When the read-version is configured as "all," both versions 1 and 2 are accepted by the system. Otherwise, only the selected version is accepted when reading configuration or exec files. The presence of incorrect hash versions aborts the script/startup.

write-version {1 | 2}

Selects the hash version that is used the next time the configuration file is saved (or an info command is executed). Be careful to save the read and write version correctly, so that the file can be properly processed after the next reboot or exec.

source-address

Syntax

source-address

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the source address that should be used in all unsolicited packets sent by the application.

This feature only applies on in-band interfaces and does not apply on the out-band management interface. Packets going out the management interface will keep using that as the source IP address. That is, when the RADIUS server is reachable through both the management interface and a network interface, the management interface is used despite what is configured under the source-address statement.

application

Syntax

application *app* [*ip-int-name* | *ip-address*]

no application *app*

Context

config>system>security>source-address

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the application to use the source IP address specified by the **source-address** command.

Parameters

app

Specifies the application name.

Values telnet, ftp, ssh, radius, tacplus, snmptrap, syslog, ping, traceroute, dns, sntp, ntp



Note:

PTP is not supported on all platforms. Only the applications supported on the platform can be used as a value with this command. Using an unsupported application value does not have the needed effect.

ip-int-name | ip-address

Specifies the name of the IP interface and IP address. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed within double quotes.

telnet-server

Syntax

[no] telnet-server

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables Telnet servers running on the system.

Telnet servers are off by default. At system startup, only SSH servers are enabled.

Telnet servers in networks limit Telnet clients to three attempts to login. The Telnet server disconnects the Telnet client session after three attempts.

The **no** form of this command disables Telnet servers running on the system.

telnet6-server

Syntax

[no] telnet6-server

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-K 2F1C2T

Description

This command enables Telnet IPv6 servers running on the system.

Telnet servers are shut down by default. At system startup, only SSH servers are enabled.

The **no** form of this command disables Telnet IPv6 servers running on the system.

2.9.2.1.2 Login, Telnet, SSH and FTP commands

exponential-backoff

Syntax

[no] exponential-backoff

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the exponential backoff of the login prompt. The **exponential-backoff** command is used to deter dictionary attacks, when a malicious user can gain access to the CLI by using a script to try **admin** with any conceivable password.

The **no** form of this command disables exponential backoff.

Default

no exponential-backoff

ftp

Syntax

ftp

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure FTP login control parameters.

idle-timeout

Syntax

idle-timeout {minutes | disable}

no idle-timeout

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the idle timeout for FTP, console, or Telnet sessions before the session is terminated by the system.

By default, an idle FTP, console, SSH, or Telnet session times out after 30 minutes of inactivity. This timer can be set per session.

The **no** form of this command reverts to the default value.

Default

idle-timeout 30

Parameters

minutes

Specifies the idle timeout in minutes. Allowed values are 1 to 1440. A value of 0 implies that the sessions never timeout.

Values 1 to 1440

disable

Keyword specifying that a session will never timeout. To re-enable idle timeout, enter the command without the disable option.

inbound-max-sessions

Syntax

inbound-max-sessions *value*

no inbound-max-sessions

Context

config>system>login-control>ftp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the maximum number of concurrent inbound FTP sessions.

This value is the combined total of inbound and outbound sessions.

The **no** form of this command reverts to the default value.

Default

inbound-max-sessions 3

Parameters

value

Specifies the maximum number of concurrent FTP sessions on the node.

Values 0 to 5

inbound-max-sessions

Syntax

inbound-max-sessions *value*

no inbound-max-sessions

Context

config>system>login-control>telnet

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command limits the number of inbound Telnet and SSH sessions. A maximum of 15 Telnet and SSH connections can be established to the router. The local serial port cannot be disabled.

The **no** form of this command reverts to the default value.

Default

inbound-max-sessions 5

Parameters

value

Specifies the maximum number of concurrent inbound Telnet sessions, expressed as an integer.

Values 0 to 7

login-banner

Syntax

[no] login-banner

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables or disables the display of a login banner. The login banner contains the 7210 SAS copyright and build date information for a console login attempt.

The **no** form of this command causes only the configured pre-login message and a generic login prompt to display.

login-control

Syntax

login-control

Context

config>system

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure the session control for the console, Telnet, and FTP.

motd

Syntax

motd {*url url-prefix: source-url* | **text** *motd-text-string*}

no motd

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the message of the day displayed after a successful console login. Only one message can be configured.

The **no** form of this command removes the message.

Parameters

url *url-prefix*: *source-url*

Specifies the URL prefix and source URL of the file containing the message of the day. When the message of the day is present as a text file, provide both *url-prefix* and the *source-url* of the file containing the message of the day. The URL prefix can be local or remote.

text *motd-text-string*

Specifies the text of the message of the day. The *motd-text-string* must be enclosed in double quotes. Multiple text strings are not appended to one another.

Some special characters can be used to format the message text. The "\n" character creates multi-line MOTDs and the "\r" character restarts at the beginning of the new line. For example, entering "\n\r" starts the string at the beginning of the new line, while entering "\n" starts the second line following the last character from the first line.

outbound-max-sessions

Syntax

outbound-max-sessions *value*

no outbound-max-sessions

Context

config>system>login-control>telnet

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command limits the number of outbound Telnet and SSH sessions. A maximum of 15 Telnet and SSH connections can be established from the router. The local serial port cannot be disabled.

The **no** form of this command reverts to the default value.

Default

outbound-max-sessions 5

Parameters

value

Specifies the maximum number of concurrent outbound Telnet sessions, expressed as an integer.

Values 0 to 7

pre-login-message

Syntax

pre-login-message *login-text-string* [**name**]

no pre-login-message

Context

config>system>login-control

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a message displayed before console login attempts on the console using Telnet.

Only one message can be configured. If multiple **pre-login-messages** are configured, the last message entered overwrites the previous entry.

It is possible to add the name parameter to an existing message without affecting the current **pre-login-messages**.

The **no** form of this command removes the message.

Parameters

login-text-string

Specifies a login text string, up to 900 characters. Any printable, 7-bit ASCII characters can be used. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed within double quotes.

name

When the keyword **name** is defined, the configured system name is always displayed first in the login message. To remove the name from the login message, the message must be cleared and a new message entered without the name.

ssh

Syntax

ssh

Context

config>system>login-control

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure SSH parameters.

disable-graceful-shutdown

Syntax

[no] **disable-graceful-shutdown**

Context

config>system>login-control>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables graceful shutdown of SSH sessions.

The **no** form of this command disables graceful shutdown of SSH sessions.

client-cipher-list

Syntax

client-cipher-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command enables the configuration of a list of allowed ciphers by the SSH client.

cipher

Syntax

cipher *index name cipher-name*

no cipher *index*

Context

config>system>security>ssh>client-cipher-list

```
config>system>security>ssh>server-cipher-list
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the configuration of a cipher. Client ciphers are used when the 7210 SAS is acting as an SSH client. Server ciphers are used when the 7210 SAS is acting as an SSH server.

The **no** form of this command removes the index and cipher name from the configuration.

Default

no cipher *index*

Parameters

index

Specifies the index of the cipher in the list.

Values 1 to 255

cipher-name

Specifies the algorithm used when performing encryption or decryption.

Values The following table lists the default ciphers used for SSHv1, which is only applicable on the 7210 SAS-D.

Table 19: SSHv1 default ciphers

Cipher index value	Cipher name	Cipher	
		Client	Server
200	3des	✓	✓
205	blowfish	✓	✓
210	des	✓	

Values The following table lists the default ciphers used for SSHv2.

Table 20: SSHv2 default ciphers

Cipher index value	Cipher name	Cipher	
		Client	Server
190	aes256-ctr	✓	✓
192	aes192-ctr	✓	✓

Cipher index value	Cipher name	Cipher	
		Client	Server
194	aes128-ctr	✓	✓
200	aes128-cbc	✓	✓
205	3des-cbc	✓	✓
225	aes192-cbc	✓	✓
230	aes256-cbc	✓	✓

client-host-key-list

Syntax

client-host-key-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure the list of host key algorithms negotiated by the 7210 SAS acting as the SSH client.

host-key

Syntax

host-key *index name host-key-name*

no host-key *index*

Context

config>system>security>ssh>client-host-key-list

config>system>security>ssh>server-host-key-list

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures a host key. Client host keys are used when the 7210 SAS is acting as an SSH client. Server host keys are used when the 7210 SAS is acting as an SSH server.

The **no** form of this command removes the index and host-key name from the configuration.

Parameters

index

Specifies the index of the host key in the list.

Values 1 to 255

host-key-name

Specifies the host-key algorithm.

Values ssh-rsa, rsa-sha2-256, rsa-sha2-512, ecdsa-sha2-nistp256, ecdsa-sha2-nistp384, ecdsa-sha2-nistp521, ssh-ed25519

client-mac-list

Syntax

client-mac-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure SSH MAC algorithms for the 7210 SAS acting as a client.

mac

Syntax

mac *index* **name** *mac-name*

no mac *index*

Context

config>system>security>ssh>client-mac-list

config>system>security>ssh>server-mac-list

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures SSH MAC algorithms for the 7210 SAS acting as an SSH server or an SSH client.

The **no** form of this command removes the specified **mac** index.

Default

no mac *index*

Parameters

index

Specifies the index of the algorithm in the list.

Values 1 to 255

mac-name

Specifies the algorithm for calculating the message authentication code.

Values The following table lists the default client and server algorithms used for SSHv2.

Table 21: SSHv2 default client and server algorithms

Cipher Index Value	MAC Name
200	hmac-sha2-512
210	hmac-sha2-256
215	hmac-sha1
220	hmac-sha1-96
225	hmac-md5
240	hmac-md5-96

client-kex-list

Syntax

client-kex-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure SSH KEX algorithms for the 7210 SAS in the client role.

By default, the SSH advertises a KEX list that contains the following algorithms:

- ecdh-sha2-nistp512
- ecdh-sha2-nistp384
- ecdh-sha2-nistp256
- diffie-hellman-group16-sha512
- diffie-hellman-group14-sha256
- diffie-hellman-group14-sha1
- diffie-hellman-group-exchange-sha1
- diffie-hellman-group1-sha1

kex

Syntax

kex *index* **name** *kex-name*

no kex *index*

Context

config>system>security>ssh>client-kex-list

config>system>security>ssh>server-kex-list

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures phase 1 SSHv2 KEX algorithms for the 7210 SAS in the SSH server or an SSH client role.

The **no** form of this command removes the specified KEX index. If all KEX indexes are removed, the default list is used.

Parameters

index

Specifies the index of the algorithm in the list. The lowest KEX index is negotiated first and the highest index, which is at the bottom of the KEX list, is negotiated last in the SSH negotiation.

Values 1 to 255

kex-name

Specifies the KEX algorithm for computing the shared secret key.

Values diffie-hellman-group16-sha512, diffie-hellman-group14-sha256, diffie-hellman-group14-sha1, diffie-hellman-group-exchange-sha1, diffie-hellman-group1-sha1, ecdh-sha2-nistp256, ecdh-sha2-nistp384, ecdh-sha2-nistp521

permit-empty-passwords

Syntax

[no] permit-empty-passwords

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures permissions that allows users with empty password strings to log in to the system.

The **no** form of this command prevents users with empty password strings from logging in.

Default

permit-empty-passwords

preserve-key

Syntax

[no] preserve-key

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

After enabling this command, private keys, public keys, and host key files are saved by the server. They are restored following a system reboot or restart of the SSH server.

The **no** form of this command specifies that the keys are held in memory by the SSH server and are not restored following a system reboot.

Default

no preserve-key

server-cipher-list

Syntax

server-cipher-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command enables the configuration of the list of allowed ciphers by the SSH server.

server-host-key-list

Syntax

server-host-key-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure the list of host key algorithms negotiated by the 7210 SAS acting as the SSH server.

server-kex-list

Syntax

server-kex-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure SSH KEX algorithms for the 7210 SAS in the SSH server role.

By default, the SSH advertises a KEX list that contains the following algorithms:

- ecdh-sha2-nistp512
- ecdh-sha2-nistp384
- ecdh-sha2-nistp256
- diffie-hellman-group16-sha512
- diffie-hellman-group14-sha256
- diffie-hellman-group14-sha1
- diffie-hellman-group-exchange-sha1
- diffie-hellman-group1-sha1

server-mac-list

Syntax

server-mac-list

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command allows the user to configure SSH MAC algorithms for the 7210 SAS acting as an SSH server.

server-shutdown

Syntax

[no] server-shutdown

Context

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the SSH servers running on the system. By default, only the SSH server is enabled at startup.

version

Syntax

version *ssh-version*

no version

Context

config>system>security>ssh

Platforms

7210 SAS-D

Description

This command specifies the SSH protocol version that is supported by the SSH server.

Default

version 2

Parameters

ssh-version

Specifies the SSH version.

- | | |
|---------------|---|
| Values | <p>1 — Specifies that the SSH server only accepts connections from clients that support SSH protocol version 1.</p> <p>2 — Specifies that the SSH server accepts connections from clients supporting either SSH protocol version 2. Version 2 is supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D.</p> <p>1-2 — Specifies that the SSH server accepts connections from clients supporting either SSH protocol version 1, or SSH protocol version 2 or both.</p> |
|---------------|---|

telnet

Syntax

telnet

Context

config>system>login-control

config>system>security (supported on all platforms, except the 7210 SAS-D)

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure Telnet parameters.

enable-graceful-shutdown

Syntax

[no] enable-graceful-shutdown

Context

config>system>login-control>telnet

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables graceful shutdown of Telnet sessions.

The **no** form of this command disables graceful shutdown of Telnet sessions.

listening-port

Syntax

listening-port *port*

no listening-port

Context

config>system>security>telnet

config>system>security>ssh

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures the non-default Telnet/SSH port for Telnet/SSH connections arriving in the base routing instance.

The **no** form of this command configures the default Telnet port to 23 and the default SSH port to 22.

Default

no listening-port

Parameters

port

Specifies the port number.

Values 1024 to 49151

2.9.2.1.3 Management Access Filter commands

management-access-filter

Syntax

[no] management-access-filter

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context edit management access filters and to reset match criteria.

Management access filters control all traffic in and out. They can be used to restrict management of the router by other nodes outside either specific subnetworks or through designated ports.

Management filters, as opposed to other traffic filters, are enforced by system software.

The **no** form of this command removes management access filters from the configuration.

ip-filter

Syntax

[no] ip-filter

Context

config>system>security>mgmt-access-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure management access IP filter parameters.

ipv6-filter

Syntax

[no] **ipv6-filter**

Context

config>system>security>mgmt-access-filter

Platforms

Supported on all 7210 SAS platforms as described in this document, except 7210 SAS-K 2F1C2T

Description

Commands in this context configure management access IPv6 filter parameters.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

default-action

Syntax

default-action {**permit** | **deny** | **deny-host-unreachable**}

Context

config>system>security>mgmt-access-filter>ip-filter

config>system>security>mgmt-access-filter>ipv6-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter** context is not supported on the 7210 SAS-K 2F1C2T.

This command enables the default action for management access in the absence of a specific management access filter match.

The **default-action** is applied to a packet that does not satisfy any match criteria in any of the management access filters. Whenever management access filters are configured, the **default-action** must be defined.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

Parameters

permit

Specifies that packets not matching the configured selection criteria in any of the filter entries are permitted.

deny

Specifies that packets not matching the selection criteria be denied and that an ICMP host unreachable message are not issued.

deny-host-unreachable

Specifies that packets not matching the selection criteria are denied and a host unreachable message is issued.

entry

Syntax

[no] **entry** *entry-id*

Context

config>system>security>mgmt-access-filter>ip-filter

config>system>security>mgmt-access-filter>ipv6-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter** context is not supported on the 7210 SAS-K 2F1C2T.

This command creates or edits a management access filter entry. Multiple entries can be created with unique *entry-id* numbers. The 7210 SAS exits the filter upon the first match found and executes the actions according to the respective action command. For this reason, entries must be sequenced correctly from most to least explicit.

An entry may not have any match criteria defined (in which case, everything matches) but must have at least the keyword **action** defined to be considered complete. Entries without the **action** keyword are considered incomplete and inactive.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

The **no** form of this command removes the specified entry from the management access filter.

Parameters

entry-id

Specifies an entry ID that uniquely identifies a match criteria and the corresponding action. Nokia recommends that entries are numbered in staggered increments. This allows users to insert a new entry in an existing policy without having to renumber the existing entries.

Values 1 to 9999

action

Syntax

action {**permit** | **deny** | **deny-host-unreachable**}

no action

Context

config>system>security>mgmt-access-filter>ip-filter>entry

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command enables the context associated with the management access filter match criteria entry.

The **action** keyword is required. If no **action** is defined, the filter is ignored. If multiple action statements are configured, the last one overwrites previous configured actions.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

If the packet does not meet any of the match criteria, the configured **default action** is applied.

Parameters

permit

Specifies that packets matching the configured criteria are permitted.

deny

Specifies that packets matching the configured selection criteria are denied and that a ICMP host unreachable message is issued.

deny-host-unreachable

Specifies that packets matching the configured selection criteria are denied and that a host unreachable message is not issued.

dst-port

Syntax

[no] **dst-port** *port* [*mask*]

Context

```
config>system>security>mgmt-access-filter>ip-filter>ip-filter>entry
config>system>security>mgmt-access-filter>ipv6-filter>entry
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

**Note:**
The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command configures a destination TCP or UDP port number or port range for a management access filter match criterion.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

The **no** form of this command removes the destination port match criterion.

Parameters

port

Specifies the destination TCP or UDP port number as match criteria.

Values 1 to 65535 (decimal)

mask

Specifies a range of destination port numbers as the match criterion.

This 16-bit mask can be configured using the formats in the following table.

Table 22: Mask formats

Format style	Format syntax	Example
Decimal	DDDDD	63488
Hexadecimal	0xHHHH	0xF800
Binary	0bBBBBBBBBBBBBBBBB	0b1111100000000000

To select a range from 1024 up to 2047, specify 1024 0xFC00 for value and mask.

Default 65535 (exact match)

Values 1 to 65535 (decimal)

fragment

Syntax

[no] fragment {true | false}

Context

config>system>security>mgmt-access-filter>ip-filter>ip-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies fragmented or non-fragmented IP packets as an IP filter match criterion.

An entry containing Layer 4 match criteria will not match non-initial (2nd, 3rd, and so on) fragments of a fragmented packet because only the first fragment contains the Layer 4 information.

The **no** form of this command removes the match criterion.

Default

no fragment

Parameters

true

Specifies to match on all fragmented IP packets. A match occurs for all packets that have either the MF (more fragment) bit set or the Fragment Offset field of the IP header set to a non-zero value.

false

Specifies to match on all non-fragmented IP packets. Non-fragmented IP packets are packets that have the MF bit set to zero and the Fragment Offset field also set to zero.

l4-src-port

Syntax

[no] l4-src-port port [mask]

Context

config>system>security>mgmt-access-filter>ip-filter>ip-filter>entry

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command configures a source TCP or UDP port number for an IP filter match criterion. An entry containing L4 match criteria will not match non-initial (2nd, 3rd, and so on) fragments of a fragmented packet because only the first fragment contains the L4 information.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

The **no** form of this command removes the source port match criterion.

Default

no l4-src-port

Parameters

port

Specifies the source port number to be used as a match criteria expressed as a decimal integer.

Values 1 to 65535

mask

Specifies the mask in dotted decimal notation.

Values 1 to 65535, decimal hex or binary

flow-label

Syntax

flow-label value

no flow-label

Context

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document, except 7210 SAS-K 2F1C2T

Description

This command configures flow label match conditions. Flow labeling enables the labeling of packets belonging to particular traffic flows for which the sender requests special handling, such as non default quality of service or real-time service.

Parameters

value

Specifies the flow identifier in an IPv6 packet header that can be used to discriminate traffic flows. For more information, see RFC 3595, *Textual Conventions for IPv6 Flow Label*.

Values 0 to 1048575

log

Syntax

[no] log

Context

config>system>security>mgmt-access-filter>ip-filter>entry

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command enables match logging. When enabled, matches on this entry cause the Security event mafEntryMatch to be raised.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

Default

no log

next-header

Syntax

next-header *next-header*

no next-header

Context

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document, except 7210 SAS-K 2F1C2T

Description

This command specifies the next header to match. The protocol type, such as TCP, UDP, OSPF, and OSPF3, is identified by its respective protocol number. Well-known protocol numbers include ICMP(1), TCP(6), UDP(17).

Parameters

next-header

Specifies the IP protocol field for IPv6 MAF, and for IPv6 the next header type to be used in the match criteria for this MAF Entry.

Values next-header: 0 to 255, protocol numbers accepted in DHB
keywords: none, crtp, crudp, egp, eigrp, encap, ether-ip, gre, icmp, idrp, igmp, igp, ip, ipv6, ipv6-icmp, ipv6-no-nxt, isis, iso-ip, l2tp, ospf-igp, pim, pnni, ptp, rdp, rsvp, stp, tcp, udp, vrrp

protocol

Syntax

[no] protocol *protocol-id*

Context

config>system>security>mgmt-access-filter>ip-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures an IP protocol type to be used as a management access filter match criterion.

The protocol type, such as TCP, UDP, and OSPF, and OSPF3, is identified by its respective protocol number. Well-known protocol numbers include ICMP (1), TCP (6), and UDP (17).

The **no** form of this command removes the protocol from the match criteria.

Parameters

protocol

Specifies the protocol number for the match criterion.

Values 1 to 255 (decimal)

router

Syntax

router {*router-instance*}

no router

Context

config>system>security>mgmt-access-filter>ip-filter>entry

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

The command configures a router name or service ID to be used as a management access filter match criterion.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

The **no** form of this command removes the router name or service ID from the match criteria.

Default

router Base

Parameters

router-instance

Specifies the router name.

Values Base, management

renum

Syntax

renum *old-entry-number new-entry-number*

Context

config>system>security>mgmt-access-filter>ip-filter

config>system>security>mgmt-access-filter>ipv6-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command rennumbers existing management access filter entries to resequence filter entries.

The system exits on the first match found and executes the actions in accordance with the accompanying **action** command. This may require some entries to be re-numbered differently from most to least explicit.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

Parameters

old-entry-number

Specifies the entry number of the existing entry.

Values 1 to 9999

new-entry-number

Specifies the new entry number that will replace the old entry number.

Values 1 to 9999

src-port

Syntax

src-port {*port-id* | **lag** *lag-id*}

no src-port

Context

config>system>security>mgmt-access-filter>ip-filter>entry

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** context is not supported on the 7210 SAS-K 2F1C2T.

This command restricts ingress management traffic to either the CPM Ethernet port or any other logical port (LAG or port) on the device.

When the source interface is configured, only management traffic arriving on those ports satisfies the match criteria.

The 7210 SAS-K 2F1C2T does not support IPv6 access management filters.

The **no** form of the command reverts to the default value.

Parameters

port-id

Specifies the port ID in the following format: slot[/mda]/port.

src-ip

Syntax

[no] **src-ip** {*ip-address/mask* | *ip-address ipv4-address-mask* | **ip-prefix-list** *prefix-list-name*}

Context

config>system>security>mgmt-access-filter>ip-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a source IPv4 address or address range to be used as a management access filter match criterion.

To match on the source IPv4 address, specify the address and the associated mask (that is, 10.1.0.0/16). The conventional notation of 10.1.0.0 255.255.0.0 can also be used.

The **no** form of this command removes the source IPv4 address match criterion.

Parameters

ip-address

Specifies the IPv4 prefix for the IP match criterion in dotted-decimal notation.

Values a.b.c.d

mask

Specifies the subnet mask length, expressed as a decimal integer.

Values 0 to 32

ipv4-address-mask

Specifies any mask, expressed in dotted quad notation.

Values 0 to 255

prefix-list-name

Specifies the IPv4 prefix list name, up to 32 characters. The **match-list** command is used to create prefix list. See the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Router Configuration Guide* for more information about the **match-list** command. This parameter is only supported on the 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C.

src-ip

Syntax

src-ip *ipv6-address/prefix-length*

src-ip **ipv6-prefix-list** *ipv6-prefix-list-name*

no src-ip

Context

config>system>security>mgmt-access-filter>ipv6-filter>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description



Note:

The **config>system>security>mgmt-access-filter>ipv6-filter>entry** command is not supported on the 7210 SAS-K 2F1C2T.

This command configures a source IPv6 address or address range to be used as a management access filter match criterion.

To match on the source IPv6 address, specify the address and the associated mask (that is, 10.1.0.0/16). The conventional notation of 10.1.0.0 255.255.0.0 can also be used.

The **no** form of this command removes the source IPv6 address match criterion.

Parameters

ipv6-prefix/prefix-length

Specifies the IPv6 prefix and prefix length used for IPv6 match criteria in dotted-decimal notation.

Values x:x:x:x:x:x:x (eight 16-bit pieces)

x:x:x:x:x:d.d.d.d

x - 0 to FFFF (hexadecimal)

d - 0 to 255 (decimal)

ipv6-prefix-length — 0 to 128 (7210 SAS-D, 7210 SAS-K 2F1C2T, 7210 SAS-K 2F6C4T, 7210 SAS-K 3SFP+ 8C)

0 to 64 (7210 SAS-Dxp)

ipv6-prefix-list-name

Specifies the IPv6 prefix list name, up to 32 characters. The **match-list** command is used to create prefix list. See the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Router Configuration Guide* for more information about the **match-list** command. This parameter is only supported on the 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C.

2.9.2.1.4 Password commands

admin-password

Syntax

admin-password *password* [*hash* | *hash2*]

no admin-password

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the context (with admin permissions) to configure a password that enables a user to become an administrator.

This password is valid only for one session. When enabled, no authorization to TACACS+ or RADIUS is performed and the user is locally regarded as an admin user.

This functionality can be enabled in two contexts:

- **config>system>security>password>admin-password**
- **global enable-admin**



Note:

See the description for [enable-admin](#). If the **admin-password** command is configured in the **config>system>security>password** context, any user can enter the administrative mode by entering the **enable-admin** command.

The **enable-admin** command is in the default profile. By default, all users have access to this command.

After the **enable-admin** command is entered, the user is prompted for a password. If the password matches, the user is granted unrestricted access to all commands.

The minimum password length is determined by the **minimum-length** command. The complexity requirements for the password is determined by the configuration in the **complexity-rules** context.

The *password* argument of this command is not sent to the servers. This is consistent with other commands that configure secrets.

The usernames and passwords in the FTP and TFTP URLs are not sent to the authorization or accounting servers when the **file>copy source-file-url dest-file-url** command is executed.

For example:

```
file copy ftp://test:secret@131.12.31.79/test/srcfile cf1:\destfile
```

In this example, the username 'test' and password 'secret' are not sent to the AAA servers (or to any logs). They are replaced with '*****'.



Note:

The **configure system security password hashing** command affects the maximum number of characters that can be used to configure the *password* parameter.

The **no** form of this command removes the admin password from the configuration.

Default

no admin-password

Parameters

password

Configures the password that enables a user to become a system administrator. The maximum length can be up to 56 characters if unhashed, 32 characters if the **hash** keyword is specified, and 54 characters if the **hash2** keyword is specified, 60 characters if hashed with **bcrypt**, or 87 to 92 characters if hashed with **sha2-pbkdf2**.

hash

Specifies the key is entered in an encrypted form. If the **hash** parameter is not used, the key is assumed to be in a non-encrypted, clear text form. For security, all keys are stored in encrypted.

hash2

Specifies the key is entered in a more complex encrypted form. If the **hash2** parameter is not used, the less encrypted **hash** form is assumed.

enable-admin

Syntax

enable-admin

Context

<global>

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context enter the administrative mode.



Note:

See the description for [admin-password](#). If **admin-password** is configured in the **config>system>security>password** context, any user can enter the administrative mode by entering the **enable-admin** command.

The **enable-admin** command is in the default profile. By default, all users are granted access to this command.

After the **enable-admin** command is entered, the user is prompted for a password. If the password matches, the user is granted unrestricted access to all the commands.

The minimum length of the password is determined by the **minimum-length** command. The complexity requirements for the password are determined by the configuration in the **complexity-rules** context.

There are two ways to verify that a user is in the **enable-admin** mode:

- The administrator can use the **show users** command to know which users are in this mode.
- Enter the **enable-admin** command again at the root prompt and an error message is returned.

Output example

The following output is an example of user information.

```
A:ALA-1# show users
=====
User Type From Login time Idle time
=====
admin Console -- 10AUG2006 13:55:24 0d 19:42:22
admin Telnet 10.20.30.93 09AUG2006 08:35:23 0d 00:00:00 A
-----
Number of users : 2
'A' indicates user is in admin mode
=====
A:ALA-1#
A:ALA-1# enable-admin
MINOR: CLI Already in admin mode.
A:ALA-1#
```

aging

Syntax

aging *days*

no aging

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of days a user password is valid before the user must change their password. This parameter can be used to force the user to change the password at the configured interval.

The **no** form of this command reverts to the default value.

Parameters

days

Specifies the maximum number of days the password is valid.

Values 1 to 500

attempts

Syntax

attempts *count* [*time minutes1* [*lockout minutes2*]

no attempts

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a threshold value of unsuccessful login attempts allowed in a specified time frame.

The threshold for the number of login attempts can be configured by using the CLI parameter *count* in the command. An SNMP trap is generated by the device when the number of login attempts exceeds the configured threshold. Generation of the trap can be suppressed using the **config>log>event-control** command. By default, the device generates a trap when the login attempts exceed the configured threshold. The trap carries information about the user ID used for the login attempt. An SNMP trap is not sent for every failed attempt. If the threshold is exceeded, the user is locked out for a specified time period.

If multiple **attempts** commands are entered, each command overwrites the previously entered command.

The **no** form of this command resets all values to default.

Default

attempts 3 time 5 lockout 10

Parameters

count

Specifies the number of unsuccessful login attempts allowed for the specified **time**. This is a mandatory value that must be explicitly entered.

Values 1 to 64

time minutes

Specifies the period of time, in minutes, that a specified number of unsuccessful attempts can be made before the user is locked out.

Values 0 to 60

lockout minutes

Specifies the lockout period, in minutes, when the user is not allowed to login. Allowed values are decimal integers. When the user exceeds the attempted count times in the

specified time, that user is locked out from any further login attempts for the configured time period.

Values 0 to 1440

Default 10

authentication-order

Syntax

authentication-order [*method-1*] [*method-2*] [*method-3*] [**exit-on-reject**]

no authentication-order

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the sequence in which password authentication, authorization, and accounting is attempted among RADIUS, TACACS+, and local passwords.

The order should be from the most preferred authentication method to the least preferred. The presence of all methods in the command line does not guarantee that they are all operational. Specifying options that are not available delays user authentication.

If all (operational) methods are attempted and no authentication for a particular login has been granted, an entry in the security log registers the failed attempt. Both the attempted login identification and originating IP address are logged with a timestamp.

The preferred order for password authentication is:

1. RADIUS
2. TACACS+
3. local passwords

The **no** form of this command reverts to the default authentication sequence.

Default

authentication-order radius tacplus local

Parameters

method-1

Specifies the first password authentication method to attempt.

Default radius

Values radius, tacplus, local

method-2

Specifies the second password authentication method to attempt.

Default tacplus

Values radius, tacplus, local

method-3

Specifies the third password authentication method to attempt.

Default local

Values radius, tacplus, local

radius

Specifies RADIUS authentication.

tacplus

Specifies TACACS+ authentication.

local

Specifies password authentication based on the local password database.

exit-on-reject

When enabled and if one of the AAA methods configured in the authentication order sends a reject, the next method in the order is not attempted. If the **exit-on-reject** keyword is not specified and if one AAA method sends a reject, the next AAA method is attempted. If in this process, all the AAA methods are exhausted, it is considered as a reject.

A rejection is distinct from an unreachable authentication server. When the **exit-on-reject** keyword is specified, authorization and accounting only use the method that provided an affirmation authentication; only if that method is no longer readable or is removed from the configuration are other configured methods attempted. If the local keyword is the first authentication and:

- **exit-on-reject** is configured and the user does not exist, the user is not authenticated.
- The user is authenticated locally, then other methods, if configured, are used for authorization and accounting.
- The user is configured locally but without console access, login is denied.

complexity-rules

Syntax

complexity-rules

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command defines a list of rules for configurable password options.

allow-user-name

Syntax

[no] **allow-user-name**

Context

config>system>security>password>complexity-rules

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the username to be used as part of the password.

The **no** form of this command does not allow the username to be used as part of the password.

credits

Syntax

credits [**lowercase** *credits*] [**uppercase** *credits*] [**numeric** *credits*] [**special-character** *credits*]

no credits

Context

config>system>security>password>complexity-rules

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the maximum credits granted for usage of the different character classes in the local passwords.

The **no** form of this command reverts to the default value.

Default

no credits

Parameters

credits

Specifies the number of credits that can be used for each character class.

Values 0 to 10

minimum-classes

Syntax

minimum-classes *minimum*

no minimum-classes

Context

config>system>security>password>complexity-rules

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command forces the use of at least as many different character classes as specified.

The **no** form of this command resets to default.

Default

no minimum-classes

Parameters

minimum

Specifies the minimum number of classes to be configured.

Values 2 to 4

minimum-length

Syntax

minimum-length *length*

no minimum-length

Context

config>system>security>password>complexity-rule

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the minimum number of characters required for locally administered passwords and keys used with SNMPv3 user authentication and encryption. See the **configure system security user snmp authentication** command for more information about the use of keys with SNMPv3-based authentication and encryption algorithms.

If multiple **minimum-length** commands are entered, each new command overwrites the previously configured password length.

The **no** form of this command reverts to the default value.

Default

minimum-length 6

Parameters

value

Specifies the minimum number of characters required for a locally administered password.

Values 6 to 50

repeated-characters

Syntax

repeated-characters *count*

no repeated-characters

Context

config>system>security>password>complexity-rules

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of times a characters can be repeated consecutively.

The **no** form of this command resets to default.

Default

no repeated-characters

Parameters

count

Specifies the minimum count of consecutively repeated characters.

Values 2 to 8

required

Syntax

required [*lowercase count*] [*uppercase count*] [*numeric count*] [*special-character count*]

no required

Context

config>system>security>password>complexity-rules

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the minimum number of different character classes required.

The **no** form of this command reverts to the default value.

Default

no required

Parameters

count

Specifies the minimum count of characters classes.

Values 0 to 10

hashing

Syntax

hashing {*bcrypt* | *sha2-pbkdf2*}

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document, except 7210 SAS-D

Description

This command configures the password hashing algorithm.

Parameters

bcrypt

Keyword to configure the bcrypt algorithm.

sha2-pbkdf2

Keyword to configure the PBKDF2 algorithm.

health-check

Syntax

[no] health-check [**interval** *interval*]

Context

config>system>security>password

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies that RADIUS and TACACS+ servers are monitored for 3 seconds each at 30 second intervals. Servers that are not configured have 3 seconds of idle time. If in this process a server is found to be unreachable, or a previously unreachable server starts responding, based on the type of the server, a trap is sent.

The **no** form of the command disables the periodic monitoring of the RADIUS and TACACS+ servers. In this case, the operational status for the active server is up if the last access was successful.

Default

health-check

Parameters

interval

Specifies the interval of the health check in seconds.

Values 6 to 1500

password

Syntax

password

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure password management parameters.

public-keys

Syntax

public-keys

Context

config>system>security>user

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure public keys for SSH.

ecdsa

Syntax

ecdsa

Context

config>system>security>user>public-keys

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure ECDSA public keys.

ecdsa-key

Syntax

ecdsa-key *ecdsa-public-key-id* [create]

no ecdsa-key *ecdsa-public-key-id*

Context

config>system>security>user>public-keys>ecdsa

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command creates an ECDSA public key and associates it with the username. Multiple public keys can be associated with the user. The key ID is used to identify these keys for the user.

The **no** form of this command removes the configured ECDSA public keys.

Default

no ecdsa-key

Parameters

create

Keyword to create an ECDSA key. The **create** keyword requirement can be enabled or disabled in the **environment>create** context.

key-id

Specifies the key identifier.

Values 1 to 32

key-value

Syntax

key-value *public-key-value*

no key-value

Context

config>system>security>user>public-keys>ecdsa>ecdsa-key

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures a value for the ECDSA public key. The public key must be enclosed in quotation marks. The key is between 1 and 1024 bits.

The **no** form of this command removes the configured ECDSA public key value.

Default

no key-value

Parameters

ecdsa-public-key-value

Specifies the public key value, up to 255 characters.

rsa

Syntax

rsa

Context

config>system>security>user>public-keys

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

Commands in this context configure RSA public keys.

rsa-key

Syntax

rsa-key *rsa-public-key-id* [**create**]

no rsa-key *rsa-public-key-id*

Context

config>system>security>user>public-keys>rsa

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command creates an RSA public key and associates it with the username. Multiple public keys can be associated with the user. The key ID is used to identify these keys for the user.

The **no** form of this command removes the configured RSA public keys.

Default

no rsa-key

Parameters

create

Keyword to create the RSA key. The **create** keyword requirement can be enabled or disabled in the **environment>create** context.

key-id

Specifies the key identifier.

Values 1 to 32

key-value

Syntax

key-value *rsa-public-key-value*

no key-value

Context

config>system>security>user>public-keys>rsa>rsa-key

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures a value for the RSA public key. The public key must be enclosed in quotation marks. The key is between 768 and 4096 bits.

The **no** form of this command removes the configured public key value.

Default

no key-value

Parameters

public-key-value

Specifies the public key value, up to 800 characters.

2.9.2.1.5 Profile management commands

action

Syntax

action {deny | permit}

Context

config>system>security>profile user-profile-name>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the action associated with the profile entry.

Parameters

deny

Specifies that commands matching the entry command match criteria are to be denied.

permit

Specifies that commands matching the entry command match criteria are permitted.

match

Syntax

match *command-string*

no match

Context

config>system>security>profile user-profile-name>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a command or command subtree.

Because the 7210 SAS exits when the first match is found, subordinate levels cannot be modified with subsequent action commands. More specific action commands should be entered with a lower entry number or in a profile that is evaluated before this profile.

All commands below the hierarchy level of the matched command are denied.

The **no** form of this command removes a match condition.

Parameters

command-string

Specifies the CLI command or CLI tree level that is the scope of the profile entry.

copy

Syntax

copy {*user source-user* | *profile source-profile*} **to** *destination* [**overwrite**]

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command copies a profile or user from a source profile to a destination profile.

Parameters

source-profile

Specifies the profile to copy, up to 32 characters. The profile must exist.

dest-profile

Specifies the destination profile, up to 32 characters.

overwrite

Specifies that the destination profile configuration is overwritten with the copied source profile configuration. A profile is not overwritten if the **overwrite** keyword is not specified.

default-action

Syntax

default-action {**deny-all** | **permit-all** | **none**}

Context

config>system>security>profile

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the default action to be applied when no match conditions are met.

Parameters

deny-all

Sets the default of the profile to deny access to all commands.

permit-all

Sets the default of the profile to allow access to all commands.

This keyword does not change access to security commands. Security commands are only and always available to members of the super-user profile.

none

Sets the default of the profile to no-action. This option is useful to assign multiple profiles to a user.

For example, if a user is a member of two profiles and the default action of the first profile is **permit-all**, the second profile is never evaluated because the **permit-all** is executed first. Set the first profile default action to **none** and if no match conditions are met in the

first profile, the second profile is evaluated. If the default action of the last profile is **none** and no explicit match is found, the default **deny-all** takes effect.

description

Syntax

description *description-string*

no description

Context

config>system>security>profile user-profile-name>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a text description stored in the configuration file for a configuration context.

The **description** command associates a text string with a configuration context to help identify the context in the configuration file.

The **no** form of this command removes the string from the context.

Parameters

string

Specifies the description character string. Allowed values are any string up to 80 characters composed of printable, 7-bit ASCII characters. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed within double quotes.

entry

Syntax

[no] entry *entry-id*

Context

config>system>security>profile

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command creates a user profile entry.

More than one entry can be created with unique *entry-id* numbers. The 7210 SAS exits when the first match is found and executes the actions according to the accompanying **action** command. Entries should be sequenced from most explicit to least explicit.

An entry may not have any match criteria defined (in which case, everything matches) but must have at least the keyword **action** for it to be considered complete.

The **no** form of this command removes the specified entry from the user profile.

Parameters

entry-id

Specifies a unique user profile command match criteria and a corresponding action. If more than one entry is configured, the entry IDs should be numbered in staggered increments to allow users to insert a new entry without requiring renumbering of the existing entries.

Values 1 to 9999

profile

Syntax

[no] **profile** *user-profile-name*

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command creates user profiles for CLI command tree permissions.

Profiles are used to either deny or allow user console access to a hierarchical branch or to specific commands.

After the profiles are created, the [users](#) command assigns users to one or more profiles. You can define up to 16 user profiles, but a maximum of 8 profiles can be assigned to a user. The *user-profile-name* can consist of up to 32 alphanumeric characters.

The **no** form of this command deletes a user profile.

Default

user-profile default

Parameters

user-profile-name

Specifies the user profile name entered as a character string. The string is case sensitive and limited to 32 ASCII 7-bit printable characters with no spaces.

renum

Syntax

renum *old-entry-number new-entry-number*

Context

config>system>security>profile user-profile-name

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command renumbers profile entries to re-sequence the entries.

Because the 7210 SAS exits when the first match is found and executes the actions according to accompanying action command, re-numbering is useful to rearrange the entries from most explicit to least explicit.

Parameters

old-entry-number

Specifies the entry number of an existing entry.

Values 1 to 9999

new-entry-number

Specifies the new entry number.

Values 1 to 9999

2.9.2.1.6 User management commands

access

Syntax

[no] **access** [ftp] [snmp] [console] [scp-sftp] [console-port-cli] [ssh-cli] [telnet-cli] [netconf]

Context

config>system>security>user

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command grants a user permission for FTP, SNMP, console, or lawful intercept (LI) access.

If a user requires access to more than one application, multiple applications can be specified in a single command. Multiple commands are treated additively.

The **no access** command denies permission for all management access methods. To deny a single access method, enter the **no** form of this command followed by the method to be denied; for example, **no access FTP** denies FTP access.

Parameters

ftp

Keyword that specifies FTP permission.

snmp

Keyword that specifies SNMP permission. This keyword is only configurable in the **config>system>security>user** context.

console

Keyword that specifies console access (serial port or Telnet) permission.

scp-sftp

Keyword that specifies SCP/SFTP access permission.

console-port-cli

Keyword that specifies console port CLI access permission.

ssh-cli

Keyword that specifies SSH CLI access permission.

telnet-cli

Keyword that specifies Telnet CLI access permission.

netconf

Keyword that specifies NETCONF access permission. This keyword is only supported for local users on the 7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C.

authentication

Syntax

authentication none

authentication *authentication-protocol key-1* [**privacy none**] [**hash** | **hash2**]

authentication *authentication-protocol key-1* **privacy** *privacy-protocol key-2* [**hash** | **hash2**]

no authentication

Context

config>system>security>user>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures the authentication and encryption method that the device uses to validate the user. The SNMP authentication allows the device to validate the managing node that issues the SNMP message and detect message tampering.

The **no** form of this command reverts to the default value.

Default

authentication none

Parameters

authentication-protocol

Specifies the SNMP authentication protocol.

- Values**
- hmac-md5-96** — Specifies use of the HMAC-MD5-96 authentication protocol.
 - hmac-sha1-96** — Specifies use of the HMAC-SHA-96 authentication protocol.
 - hmac-sha2-224** — Specifies use of the HMAC-SHA-224 authentication protocol.
 - hmac-sha2-256** — Specifies use of the HMAC-SHA-256 authentication protocol.
 - hmac-sha2-384** — Specifies use of the HMAC-SHA-384 authentication protocol.
 - hmac-sha-512** — Specifies use of the HMAC-SHA-512 authentication protocol.

privacy-protocol

Specifies the SNMP privacy protocol.

- Values**
- none** — Specifies that encryption should not be used.
 - cbc-des** — Specifies the use of the CBC-DES privacy protocol.
 - cfb128-aes-128** — Specifies the use of the CFB128-AES-128 privacy protocol.
 - cfb128-aes-192** — Specifies the use of the CFB128-AES-192 privacy protocol.
 - cfb128-aes-256** — Specifies the use of the CFB128-AES-256 privacy protocol.

hash

Keyword to indicate the encryption mechanism used to store the authentication and privacy keys in an encrypted format in the configuration file. When **hash** is not specified, non-encrypted characters can be entered. When hash is specified, the key is expected

to be decrypted using the hash mechanism. For security, all keys are stored in encrypted form in the configuration file with the **hash** or **hash2** keyword specified.

hash2

Keyword to indicate the encryption mechanism used to store all specified keys in an encrypted format in the configuration file. For example, the **hash2** encrypted variable cannot be copied and pasted to a different node. If the **hash2** keyword is not specified, the key is assumed to be unencrypted in cleartext form. The **hash2** keyword is the default mechanism used if hash is not specified. Therefore, the user does not need to specify **hash2** explicitly while entering the key. For security, all keys are stored in encrypted form in the configuration file with the **hash** or **hash2** keyword specified.

key-1

Specifies the *key-1* value for SNMP packet encryption.

Values **localized-privacy-key** — Key value generated by using the **tools>perform>system>management-interface>snmp>generate-key** command. When this key is stored in the configuration, it is stored in encrypted form using one of the mechanisms available (for example, hash or hash2) along with the keyword to indicate the mechanism used (for example, **config>system>security>user "User1" snmp>privacy cbc-des e8482d1f66e057450afa6e hash**).

hash-key — Key value obtained by using the hash mechanism to store the key in encrypted format in the configuration file. Initially the key value is generated by using the **tools>perform>system>management-interface>snmp>generate-key** command and further stored in the configuration using the hash mechanism.

hash2-key — Key value obtained by using the hash2 mechanism for encrypting the key. This value cannot be entered by the user. It is automatically generated using the hash2 mechanism, when the user does not explicitly specify the hash mechanism for encrypting the key, and stored in the configuration file.

key-2

Specifies the *key-2* value for SNMP packet encryption.

Values **localized-privacy-key** — Key value generated by using the **tools>perform>system>management-interface>snmp>generate-key** command. When this key is stored in the configuration, it is stored in encrypted form using one of the mechanisms available (for example, hash or hash2) along with the keyword to indicate the mechanism used (for example, **config>system>security>user "User1" snmp>authentication hmac-md5-96 e8482d1f66e057a0be0e50afa6e hash**).

hash-key — Key value obtained by using the hash mechanism to store the key in encrypted format in the configuration file. Initially, the key value is generated by using the **tools>perform>system>management-interface>snmp>generate-key** command and further stored in the configuration using the hash mechanism.

hash2-key — Key value obtained by using the hash2 mechanism for encrypting the key. This value cannot be entered by the user. It is automatically generated using the hash2 mechanism, when the user does not explicitly specify the hash mechanism for encrypting the key, and stored in the configuration file.

authentication

Syntax

authentication none

authentication {**md5** *key-1* | **sha** *key-1*} [**privacy none**] [**hash**]

authentication {**md5** *key-1* | **sha** *key-1*} **privacy** *privacy-level* *key-2* [**hash**]

no authentication

Context

config>system>security>user>snmp

Platforms

Supported on the 7210 SAS-D

Description

This command configures the authentication and encryption method for the user to be validated by the device. SNMP authentication allows the device to validate the managing node that issued the SNMP message and detect message tampering.

The **user password** is encrypted first by the MD5/SHA/DES algorithm. The output of the algorithm is always a fixed length string (key). Copy the **password** key and paste the output in the appropriate **authentication** command **key** parameter.

The **no** form of this command reverts to the default value.

Default

authentication none

Parameters

none

Keyword to specify that authentication should not be used. If **none** is specified, privacy cannot be configured.

hash

Keyword to store all specified keys in an encrypted format in the configuration file. The password must be entered in encrypted form when this keyword is used. When **hash** is not specified, non-encrypted characters can be entered.

md5 *key*

Specifies the authentication protocol, which can be either HMAC-MD5-96 or HMAC-SHA-96.

The MD5 authentication key is stored in an encrypted format. The minimum key length is determined by the **config system security password complexity-rules minimum-length** [minimum-length](#) value. The maximum length is 16 octets (32 printable characters).

The complexity of the key is determined by the configuration in the **complexity-rules** context.

sha key

The authentication protocol, which can be either HMAC-MD5-96 or HMACSHA-96.

The **sha** authentication key is stored in an encrypted format. The minimum key length is determined by the **config system security password complexity-rules** [minimum-length](#) value. The maximum length is 20 octets (40 printable characters).

The complexity of the key is determined by the configuration in the **complexity-rules** context.

privacy none

Keyword to specify that SNMP packet encryption should not be performed.

privacy-level

Specifies the privacy level.

Values des-key, aes-128-cfb-key

group

Syntax

group *group-name*

no group

Context

config>system>security>user>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command associates (or links) a user to a group name. The group name must be configured with the **config>system>security>user>snmp>group** command. The [access](#) command links the group with one or more views, security models, security levels, and read, write, and notify permissions.

Parameters

group-name

Specifies the group name, up to 32 characters, that is associated with this user. A user can be associated with one group name per security model.

cannot-change-password

Syntax

[no] cannot-change-password

Context

config>system>security>user>console

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command disables the user's privilege to change their password for both FTP and console login.

The **cannot-change-password** flag is not replicated when a user copy is performed. A **new-password-at-login** flag is created instead.

The **no** form of this command enables the user privilege to change their password.

Default

no cannot-change-password

console

Syntax

console

Context

config>system>security>user

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure user profile membership for the console (either Telnet or serial port user).

copy

Syntax

copy {user source-user | profile source-profile} to destination [overwrite]

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command copies specific user configuration parameters to another (destination) user.

The password is set to a carriage return and a new password at login must be selected.

Parameters

source-user

Specifies the user to copy, up to 32 characters. The user must already exist.

dest-user

Specifies the destination user to which the profile is copied, up to 32 characters.

overwrite

Specifies that the destination user configuration is overwritten with the copied source user configuration. A configuration is not overwritten if the **overwrite** command is not specified.

home-directory

Syntax

home-directory *url-prefix* [*directory*] [*directory/directory ..*]

no home-directory

Context

config>system>security>user

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the home directory of the user for file access. Use the CLI **file** commands and output modifiers such as > (file redirect) to access files locally, or remotely via the FTP and SCP. If the home directory does not exist, a warning message is displayed when the user logs in.

When **restricted-to-home** is configured, file access is denied unless the **home-directory** command is configured and the directory is created by an administrator.

The **no** form of this command removes the configured home directory of the user. The directory must be also removed by the administrator.

Default

no home-directory

Parameters

url-prefix [directory] [directory/directory ..]

Specifies the local home directory URL prefix of the user and directory structure, up to 190 characters.

profile

Syntax

profile *user-profile-name*

no profile

Context

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the profile for the user based on the specified template.

Parameters

user-profile-name

Specifies the user profile name entered as a character string. The string is case sensitive and limited to 32 ASCII 7-bit printable characters with no spaces.

login-exec

Syntax

[no] **login-exec** *url-prefix: source-url*

Context

config>system>security>user>console

config>system>security>user-template>console

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a user's login exec file, which executes whenever the user successfully logs in to a console session.

Only one exec file can be configured. If multiple **login-exec** commands are entered for the same user, each subsequent entry overwrites the previous entry.

The **no** form of this command disables the login exec file for the user.

Parameters

url-prefix: source-url

Specifies either a local or remote URL, up to 200 characters, that identifies the exec file that is executed after the user successfully logs in.

member

Syntax

member *user-profile-name* [*user-profile-name*...up to 8max]

no member *user-profile-name*

Context

config>system>security>user>console

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command allows the user access to a profile.

A user can participate in up to eight profiles.

The **no** form of this command deletes user access to a profile.

Parameters

user-profile-name

Specifies the user profile name, up to 32 characters.

new-password-at-login

Syntax

[no] **new-password-at-login**

Context

config>system>security>user>console

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command forces the user to change a password at the next console login. The new password applies to FTP but the change can be enforced only by the console, SSH, or Telnet login.

The **no** form of this command does not force the user to change passwords.

Default

no new-password-at-login

password

Syntax

password [*password*] [**hash** | **hash2**]

Context

config>system>security>user

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the user password for console and FTP access.

The use of the **hash** keyword sets the initial password when the user is created or modifies the password of an existing user and specifies that the specific password was hashed using hashing algorithm version 1.

The password is stored in an encrypted format in the configuration file when specified. Passwords should be encased in double quotes (" ") at the time of the password creation. The double quote character (") is not accepted inside a password. It is interpreted as the start or stop delimiter of a string.

The use of the **hash2** keyword specifies that the specific password is already hashed using hashing algorithm version 2. A semantic check is performed on the specific password field to verify if it is a valid hash 2 key to store in the database.

Example

The following output is an example of **user** syntax.

```
config>system>security# user testuser1
config>system>security>user$ password "zx/Uhcn6ReM0Z3BvrWcvk." hash2
config>system>security>user# exit

config>system>security# info
-----
...
        user "testuser1"
            password "zx/Uhcn6ReM0Z3BvrWcvk." hash2
        exit
...
```

```
-----  
config>system>security#
```

Parameters

password

Specifies the password that the user must be entered during the login procedure. The minimum length of the password is determined by the **minimum-length** command. The maximum length can be up to 20 characters if unhashed and 32 characters if hashed.

All password special characters (#, \$, spaces, and so on) must be enclosed within double quotes.

For example: config>system>security>user# password "south#bay?"

The question mark character (?) cannot be directly inserted as input during a Telnet connection because the character is bound to the **help** command during a normal Telnet/console connection.

To insert a # or ? character, they must be entered inside a notepad or clipboard program and cut and pasted into the Telnet session in the password field that is encased in the double quotes as delimiters for the password.

If a **password** is entered without any parameters, a password length of zero is implied: (carriage return).

hash

Specifies that the specific password is already hashed using hashing algorithm version 1. A semantic check is performed on the specific password field to verify if it is a valid hash 1 key to store in the database.

hash2

Specifies that the specific password is already hashed using hashing algorithm version 2. A semantic check is performed on the specific password field to verify if it is a valid hash 2 key to store in the database.

restricted-to-home

Syntax

[no] **restricted-to-home**

Context

config>system>security>user

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command denies user access to files outside their home directory. Files can be accessed locally by CLI file commands and output modifiers such as > (file redirect), or remotely via FTP and SCP.

When enabled, the system denies all configuration save operations (such as **admin save**) via any management interface (such as CLI and NETCONF) unless **save-when-restricted** is enabled.

When **restricted-to-home** is configured, file access is denied unless the **home-directory** is configured and the directory is created by an administrator.

The **no** form of this command permits the user to access all files on the system.

Default

no restricted-to-home (for administrators)

restricted-to-home (for all other users)

save-when-restricted

Syntax

[no] save-when-restricted

Context

config>system>security>user

config>system>security>user-template

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command specifies whether the system permits configuration save operations for all configuration regions (bof, debug, configure) via any management interface (such as CLI and NETCONF) even if **restricted-to-home** is enabled.

The configuration for a region can be saved with CLI commands such as **bof save**, **admin debug-save**, or **admin save**.

The **no** form of this command denies saving the configuration when **restricted-to-home** is enabled.

Default

save-when-restricted true (for all local users and administrators)

snmp

Syntax

snmp

Context

config>system>security>user

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure SNMP group membership for a specific user and defines encryption and authentication parameters.

All SNMPv3 users must be configured with the commands available in this CLI node.

The 7210 SAS always uses the configured SNMPv3 username as the security username.

user-template

Syntax

user-template {tacplus_default | radius_default}

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures default security user template parameters.

Parameters

tacplus_default

Specifies that the default TACACS+ user template is actively applied to the TACACS+ user.

radius_default

Specifies that the default RADIUS user template is actively applied to the RADIUS user if no VSAs are returned with the auth-accept from the RADIUS server.

users

Syntax

users

Context

show

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command creates a local user and a context to edit the user configuration.

When creating a new user and entering the **info** command, the system displays a password in the output. This is expected behavior in the hash2 scenario. However, when using that username, no password is required. The user can log in to the system and <ENTER> at the password prompt. The user is logged in.

Unless an administrator explicitly changes the password, it is null. The hashed value displayed uses the username and null password field, so when the username is changed, the displayed hashed value changes.

user

Syntax

user *user-name*

Context

admin

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables a local user and a context to edit the user configuration.

If a new *user-name* is entered, the user is created. If an existing *user-name* is specified, the user parameters can be edited.

When the **info** command is entered for a newly created user, the system displays a password in the output. This is expected behavior in the hash2 scenario. However, no password is required when that username is used. To log in to the system, the user can press <ENTER> at the password prompt and be logged in.

Unless an administrator explicitly changes the password, it is null. The displayed hashed value uses the username and null password field. Consequently, when the username is changed, the displayed hashed value also changes.

The **no** form of this command deletes the user and all configuration data. Users cannot delete themselves.

Parameters

user-name

Specifies the name of the user, up to 32 characters.

2.9.2.1.7 RADIUS client commands

accounting

Syntax

[no] **accounting**

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables RADIUS accounting.

The **no** form of this command disables RADIUS accounting.

Default

no accounting

accounting-port

Syntax

accounting-port *port*

no accounting-port

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies a UDP port number on which to contact the RADIUS server for accounting requests.

Parameters

port

Specifies the UDP port number.

Values 1 to 65535

Default 1813

authorization

Syntax

[no] authorization

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures RADIUS authorization parameters for the system.

Default

no authorization

port

Syntax

port *port*

no port

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the TCP port number to contact the RADIUS server.

The **no** form of this command reverts to the default value.

Default

port 1812 (as specified in RFC 2865, *Remote Authentication Dial In User Service (RADIUS)*)

Parameters

port

Specifies the TCP port number to contact the RADIUS server.

Values 1 to 65535

radius

Syntax

[no] radius

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure RADIUS authentication on the 7210 SAS router.

Implement redundancy by configuring multiple server addresses for each 7210 SAS series router.

The **no** form of this command removes the RADIUS configuration.

retry

Syntax

retry *count*

no retry

Context

config>system>security>radius

config>system>security>dot1x>radius-plcy

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of times the router attempts to contact the RADIUS server for authentication if there are problems communicating with the server.

The **no** form of this command reverts to the default value.

Default

retry 3

Parameters

count

Specifies the retry count.

Values 1 to 10

server

Syntax

server *server-index* **address** *ip-address* [**secret** *key*] [**hash** | **hash2**] [**tls-client-profile** *profile*]

no server *index*

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command adds a RADIUS server and configures the RADIUS server IP address, index, and key values.

Up to five RADIUS servers can be configured at one time. RADIUS servers are accessed in order from lowest to highest index for authentication requests until a response from a server is received. A higher indexed server is only queried if no response is received from a lower indexed server (which implies that the server is not available). If a response from a server is received, no other RADIUS servers are queried. It is assumed that there are multiple identical servers configured as backups and that the servers do not have redundant data.

The 7210 SAS-K 2F1C2T does not support IPv6 addresses for RADIUS servers.

The **no** form of the command removes the server from the configuration.

Parameters

server-index

Specifies the index for the RADIUS server. The index determines the sequence in which the servers are queried for authentication requests. Servers are queried in order from lowest to highest index.

Values 1 to 5

ip-address

Specifies the IP address of the RADIUS server. Two RADIUS servers cannot have the same IP address. An error message is generated if the server address is a duplicate.

Values *ipv4-address* — a.b.c.d (host bits must be 0)
ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)

x:x:x:x:x:d.d.d.d

x — [0..FFFF]H

d — [0..255]D

key

Specifies the secret key, up to 20 characters, to access the RADIUS server. This secret key must match the password on the RADIUS server.

hash

Specifies the key is entered in an encrypted form. If the hash parameter is not used, the key is assumed to be in a non-encrypted, clear text form. For security, all keys are stored in encrypted form in the configuration file with the hash parameter specified.

hash2

Specifies the key is entered in a more complex encrypted form. If the **hash2** parameter is not used, the less encrypted **hash** form is assumed.

profile

Specifies the TLS profile name, up to 32 characters, for the RADIUS server.

shutdown

Syntax

[no] shutdown

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command administratively disables the RADIUS protocol operation. Shutting down the protocol does not remove or change the configuration other than the administrative state.

The operational state of the entity is disabled as well as the operational state of any entities contained within. Many objects must be shut down before they may be deleted.

The **no** form of this command administratively enables the protocol.

Default

no shutdown

timeout

Syntax

timeout *seconds*

no timeout

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of seconds the router waits for a response from a RADIUS server.

The **no** form of this command reverts to the default value.

Default

timeout 3

Parameters

seconds

Specifies the number of seconds the router waits for a response from a RADIUS server, expressed as a decimal integer.

Values 1 to 90

use-default-template

Syntax

[no] use-default-template

Context

config>system>security>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies whether the RADIUS user template is actively applied to the RADIUS user if no VSAs are returned with the auth-accept from the RADIUS server. When enabled, the RADIUS user template is actively applied if no VSAs are returned with the auth-accept from the RADIUS server.

The **no** form of this command disables the command.

2.9.2.1.8 TACACS+ client commands

tacplus

Syntax

[no] tacplus

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure TACACS+ authentication on the router.

Configure multiple server addresses for each router for redundancy.

The **no** form of this command removes the TACACS+ configuration.

accounting

Syntax

accounting [record-type {start-stop | stop-only}]

no accounting

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the type of accounting record packet that is to be sent to the TACACS+ server.

The **record-type** parameter indicates whether TACACS+ accounting start and stop packets be sent or just stop packets be sent.

Default

record-type stop-only

Parameters

record-type start-stop

Specifies that a TACACS+ start packet is sent whenever the user executes a command.

record-type stop-only

Specifies that a stop packet is sent whenever the command execution is complete.

authorization

Syntax

[no] authorization

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures TACACS+ authorization parameters for the system.

Default

no authorization

server

Syntax

server *server-index* **address** *ip-address* **secret** *key* [**hash** | **hash2**] [**port** *port*]

no server *server-index*

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command adds a TACACS+ server and configures the TACACS+ server IP address, index, and key values.

Up to five TACACS+ servers can be configured at any one time. TACACS+ servers are accessed in order from lowest index to the highest index for authentication requests.

The 7210 SAS-K 2F1C2T does not support IPv6 addresses for TACACS+ servers.

The **no** form of this command removes the server from the configuration.

Parameters

server-index

Specifies the index for the TACACS+ server. The index determines the sequence in which the servers are queried for authentication requests. Servers are queried in order from the lowest index to the highest index.

Values 1 to 5

ip-address

Specifies the IP address of the TACACS+ server. Two TACACS+ servers cannot have the same IP address. An error message is generated if the server address is a duplicate.

Values ipv4-address — a.b.c.d (host bits must be 0)
ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)
x:x:x:x:x:d.d.d.d
x — [0..FFFF]H
d — [0..255]D

key

Specifies the secret key, up to 128 characters, to access the TACACS+ server. This secret key must match the password on the TACACS+ server.

hash

Specifies the key is entered in an encrypted form. If the hash parameter is not used, the key is assumed to be in a non-encrypted, clear text form. For security, all keys are stored in encrypted form in the configuration file with the hash parameter specified.

hash2

Specifies the key is entered in a more complex encrypted form. If the **hash2** parameter is not used, the less encrypted **hash** form is assumed.

port

Specifies the port ID.

Values 0 to 65535

service-request

Syntax

[no] **service-request**

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context enable users to request Nokia services from the TACACS+ server after successful authentication.

The **no** form of this command disables Nokia services from being requested from the TACACS+ server.

Default

no service-request

nokia-netconf-base-op-authorization

Syntax

[no] nokia-netconf-base-op-authorization

Context

config>system>security>tacplus>service-request

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables users to request the nokia-netconf-base-op-authorization service from the TACACS+ server after successful authentication.

The **no** form of this command disables that the nokia-netconf-base-op-authorization service from being requested from the TACACS+ server.

Default

no nokia-netconf-base-op-authorization

nokia-user

Syntax

[no] nokia-user

Context

config>system>security>tacplus>service-request

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the nokia-user service to be requested from the TACACS+ server after successful authentication.

The **no** form of this command disables the nokia-user service from being requested from the TACACS+ server.

Default

no nokia-user

shutdown

Syntax

[no] shutdown

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command administratively disables the TACACS+ protocol operation. Shutting down the protocol does not remove or change the configuration other than the administrative state.

The operational state of the entity is disabled as well as the operational state of any entities contained within. Many objects must be shut down before they may be deleted.

The **no** form of this command administratively enables the protocol.

Default

no shutdown

timeout

Syntax

timeout *seconds*

no timeout

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of seconds the router waits for a response from a TACACS+ server.
The **no** form of the command reverts to the default value.

Default

timeout 3

Parameters

seconds

Specifies the number of seconds the router waits for a response from a TACACS+ server, expressed as a decimal integer.

Values 1 to 90

shutdown

Syntax

[no] shutdown

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command administratively disables the TACACS+ protocol operation. Shutting down the protocol does not remove or change the configuration other than the administrative state.

The operational state of the entity is disabled as well as the operational state of any entities contained within. Many objects must be shut down before they may be deleted.

The **no** form of this command administratively enables the protocol which is the default state.

Default

no shutdown

use-default-template

Syntax

[no] use-default-template

Context

config>system>security>tacplus

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies whether the user template defined by this entry is to be actively applied to the TACACS+ user.

2.9.2.1.9 Generic 802.1x commands

dot1x

Syntax

[no] dot1x

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure 802.1x network access control on the 7210 SAS router.

The **no** form of this command removes the 802.1x configuration.

radius-plcy

Syntax

[no] radius-plcy *name* [create]

Context

config>system>security>dot1x

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures RADIUS server parameters for 802.1x network access control on the 7210 SAS router.



Note:

The RADIUS server configured under the **config>system>security>dot1x>radius-plcy** context authenticates clients who get access to the data plane of the 7210 SAS as opposed to the

RADIUS server configured under the **config>system>radius** context which authenticates CLI login users who get access to the management plane of the 7210 SAS.

The **no** form of this command removes the RADIUS server configuration for 802.1x.

Parameters

name

Specifies the name of the RADIUS policy, up to 32 characters.

create

This keyword is mandatory to create a RADIUS policy.

retry

Syntax

retry *count*

no **retry**

Context

config>system>security>dot1x

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of times the router attempts to contact the RADIUS server for authentication if there are problems communicating with the server.

The **no** form of this command reverts to the default value.

Default

retry 3

Parameters

count

Specifies the retry count.

Values 1 to 10

server

Syntax

server *server-index* **address** *ip-address* **secret** *key* [**hash** | **hash2**] [**auth-port** *auth-port*] [**acct-port** *acct-port*] [**type** *server-type*]

no server *index*

Context

config>system>security> dot1x>radius-plcy

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command adds a dot1x server and configures the dot1x server IP address, index, and key values.

Up to five dot1x servers can be configured at any one time. Dot1x servers are accessed in order from lowest to highest index for authentication requests until a response from a server is received. A higher indexed server is only queried if no response is received from a lower indexed server (which implies that the server is not available). If a response from a server is received, no other dot1x servers are queried. It is assumed that there are multiple identical servers configured as backups and that the servers do not have redundant data.

The 7210 SAS-K 2F1C2T does not support IPv6 addresses for dot1x servers.

The **no** form of the command removes the server from the configuration.

Parameters

server-index

Specifies the index for the dot1x server. The index determines the sequence in which the servers are queried for authentication requests. Servers are queried in order from lowest to highest index.

Values 1 to 5

address ip-address

Specifies the IP address of the dot1x server. Two dot1x servers cannot have the same IP address. An error message is generated if the server address is a duplicate.

secret key

Specifies the secret key, up to 128 characters, to access the dot1x server. This secret key must match the password on the dot1x server.

hash

Specifies the key is entered in an encrypted form. If the hash parameter is not used, the key is assumed to be in a non-encrypted, clear text form. For security, all keys are stored in encrypted form in the configuration file with the hash parameter specified.

hash2

Specifies the key is entered in a more complex encrypted form. If the **hash2** parameter is not used, the less encrypted **hash** form is assumed.

acct-port acct-port

Specifies the UDP port number on which to contact the RADIUS server for accounting requests.

auth-port auth-port

Specifies a UDP port number to be used as a match criteria.

Values 1 to 65535

type server-type

Specifies the server type.

Values authorization, accounting, combined

source-address

Syntax

source-address *ip-address*

no source-address

Context

config>system>security> dot1x>radius-plcy

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the NAS IP address to be sent in the RADIUS packet.

By default the System IP address is used in the NAS field.

The **no** form of the command reverts to the default value.

Parameters

ip-address

Specifies the IP prefix for the IP match criterion in dotted decimal notation.

Values a.b.c.d

shutdown

Syntax

[no] shutdown

Context

config>system>security>dot1x

config>system>security>dot1x>radius-plcy

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command administratively disables the 802.1x protocol operation. Shutting down the protocol does not remove or change the configuration other than the administrative state.

The operational state of the entity is disabled as well as the operational state of any entities contained within.

The **no** form of the command administratively enables the protocol which is the default state.

Default

shutdown

timeout

Syntax

timeout *seconds*

no timeout

Context

config>system>security>dot1x>radius-plcy

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the number of seconds the router waits for a response from a RADIUS server.

The **no** form of the command reverts to the default value.

Default

timeout 3

Parameters

seconds

Specifies the number of seconds the router waits for a response from a RADIUS server, expressed as a decimal integer.

Values 1 to 90

2.9.2.1.10 TCP Enhanced Authentication commands

keychain

Syntax

[no] **keychain** *keychain-name*

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure keychain parameters. A keychain must be configured on the system before it can be applied to a session.

The **no** form of this command removes the keychain nodal context and everything under it from the configuration. If the keychain to be removed is in use when the **no keychain** command is entered, the command is not accepted and an error indicating that the keychain is in use is printed.

Parameters

keychain-name

Specifies a keychain name, up to 32 characters, that identifies this particular keychain entry.

direction

Syntax

direction

Context

config>system>security>keychain

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the data type that indicates the TCP stream direction to apply the keychain.

```
bi
```

Syntax

```
bi
```

Context

```
config>system>security>keychain>direction
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures keys for both send and receive stream directions.

```
uni
```

Syntax

```
uni
```

Context

```
config>system>security>keychain>direction
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures keys for send or receive stream directions.

```
receive
```

Syntax

```
receive
```

Context

```
config>system>security>keychain>direction>uni
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables the receive nodal context. Entries defined under this context are used to authenticate TCP segments that are being received by the router.

send

Syntax

send

Context

config>system>security>keychain>direction>uni

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the send nodal context to sign TCP segments that are being sent by the router to another device.

entry

Syntax

entry *entry-id* **key** [*authentication-key* | *hash-key* | *hash2-key*] [**hash** | **hash2**] **algorithm** *algorithm*

no entry *entry-id*

Context

config>system>security>keychain>direction>bi

config>system>security>keychain>direction>uni>receive

config>system>security>keychain>direction>uni>send

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command defines a particular key in the keychain. Entries are defined by an *entry-id*. A keychain must have valid entries for the TCP enhanced authentication mechanism to work.

The **no** form of this command removes the entry from the keychain. If the entry is the active entry for sending, this causes a new active key to be selected (if one is available using the youngest key rule). If it is the only possible send key, the system rejects the command with an error indicating that the configured key is the only available send key.

If the key is one of the eligible keys for receiving, it is removed. If the key is the only possible eligible key, the command is not accepted, and an error message indicating that this is the only eligible key is displayed.

Parameters

entry-id

Specifies an entry that represents a key configuration to be applied to a keychain.

Values 0 to 63

key

Specifies a key ID which is used along with *keychain-name* and **direction** to uniquely identify this particular key entry.

Values authentication-key — Specifies the **authentication-key** that will be used by the encryption algorithm. The key is used to sign and authenticate a protocol packet. A key must be 160 bits for algorithm hmac-sha-1-96 and must be 128 bits for algorithm aes-128-cmac-96. If the key specified with the entry command amounts to less than this number of bits, it is padded internally with zero bits up to the appropriate length. The **authentication-key** can be any combination of letters or numbers.

hash-key — Specifies the hash key, up to 33 characters. If spaces are used in the string, enclose the entire string in quotation marks (" "). This is useful when a user must configure the parameter, but, for security purposes, the actual unencrypted key value is not provided.

hash2-key — Specifies the hash2 key, up to 96 characters. If spaces are used in the string, enclose the entire string in quotation marks (" "). This is useful when a user must configure the parameter, but, for security purposes, the actual unencrypted key value is not provided.

hash

Keyword to specify the key is entered in an encrypted form. If the hash parameter is not used, the key is assumed to be in a non-encrypted, clear text form. For security, all keys are stored in encrypted form in the configuration file with the hash parameter specified.

hash2

Keyword to specify the key is entered in a more complex encrypted form.

algorithm

Specifies an enumerated integer that indicates the encryption algorithm to be used by the key defined in the keychain.

Values aes-128-cmac-96 — Specifies an algorithm based on the AES standard for TCP authentication as described in RFC 4494 for BGP and LDP.

hmac-sha-1-96 — Specifies an algorithm based on SHA-1.

password — Specifies a simple password authentication for OSPF, IS-IS, and RSVP-TE.

message-digest — Specifies the MD5 hash is used for TCP authentication.

hmac-sha-1 — Specifies the sha-1 algorithm for OSPF, IS-IS, and RSVP-TE.

hmac-sha-256 — Specifies the sha-256 algorithm for OSPF and IS-IS.

hmac-md5 — Specifies MD5 hash is used for IS-IS and RSVP-TE.

aes-128-cmac-128 — Specifies an algorithm based on the AES standard as described in RFC 4493 for NTP.

begin-time

Syntax

begin-time [*date*] [*hours-minutes*] [**UTC**] [**now**] [**forever**]

Context

config>system>security>keychain>direction>bi>entry

config>system>security>keychain>direction>uni>receive>entry

config>system>security>keychain>direction>uni>send>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the calendar date and time after which the key specified by the keychain authentication key is used to sign and authenticate the protocol stream.

If no date and time is set, the **begin-time** is represented by a date and time string with all nulls and the key is not valid by default.

Parameters

date hours-minutes

Specifies the date and time for the key to become active.

Values date: YYYY/MM/DD hours-minutes: hh:mm[:ss]

now

Specifies that the key should become active immediately.

forever

Specifies that the key should always be active.

end-time

Syntax

end-time [*date*] [*hours-minutes*] [**UTC**] [**now**] [**forever**]

Context

config>system>security>keychain>direction>uni>receive>entry

config>system>security>keychain>direction>uni>send>entry

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the calendar date and time after which the key specified by the authentication key is no longer eligible to sign and authenticate the protocol stream.

Default

end-time forever

Parameters

date

Specifies the calendar date after which the key specified by the authentication key is no longer eligible to sign and authenticate the protocol stream in the YYYY/MM/DD format. When no year is specified the system assumes the current year.

hours-minutes

Specifies the time after which the key specified by the authentication key is no longer eligible to sign and authenticate the protocol stream in the hh:mm[:ss] format. Seconds are optional, and if not included, assumed to be 0.

UTC

Indicates that time is specified with reference to Coordinated Universal Time in the input.

now

Specifies a time equal to the current system time.

forever

Specifies a time beyond the current epoch.

tolerance

Syntax

tolerance [*seconds* | **forever**]

Context

```
config>system>security>keychain>direction>bi>entry  
config>system>security>keychain>direction>uni>receive>entry  
config>system>security>keychain>direction>uni>send>entry
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the amount of time that an eligible receive key should overlap with the active send key or to never expire.

Parameters

seconds

Specifies the duration that an eligible receive key overlaps with the active send key.

Values 0 to 4294967294 seconds

forever

Specifies that an eligible receive key overlaps with the active send key forever.

tcp-option-number

Syntax

tcp-option-number

Context

```
config>system>security>keychain
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure the TCP option number to be placed in the TCP packet header.

receive

Syntax

receive *option-number*

Context

```
config>system>security>keychain>tcp-option-number
```

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the TCP option number accepted in TCP packets received.

Default

receive 254

Parameters

option-number

Specifies an enumerated integer that indicates the TCP option number to be used in the TCP header.

Values 253, 254, 253, 254

send

Syntax

send *option-number*

Context

config>system>security>keychain>tcp-option-number

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the TCP option number accepted in TCP packets sent.

Default

send 254

Parameters

option-number

Specifies an enumerated integer that indicates the TCP option number to be used in the TCP header.

Values 253, 254

dst-port

Syntax

dst-port [*tcp/udp port-number*] [*mask*]

no dst-port

Context

config>sys>sec>cpm>entry>match

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the TCP/UDP port to match the destination port of the packet. An entry containing L4 match criteria do not match non-initial (2nd, 3rd, and so on) fragments of a fragmented packet because only the first fragment contains the L4 information.

The **no** form of this command removes the destination port match criterion.

Parameters

dst-port-number

Specifies the destination port number to be used as a match criteria expressed as a decimal integer.

Values 0 to 65535 (accepted in decimal hex or binary)

mask

Specifies the 16 bit mask to be applied when matching the destination port.

lockout

Syntax

lockout all

lockout user *user-name*

Context

admin>clear

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command clears any lockouts for a specific user.

Parameters

all

Specifies to clear the lockout for all users.

user-name

Specifies the locked username, up to 32 characters.

2.9.2.1.11 IPsec commands

ipsec

Syntax

ipsec

Context

config

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

Commands in this context configure Internet Protocol security (IPsec) parameters. IPsec is a structure of open standards that uses cryptographic security services to ensure private, secure communications over IP networks.

static-sa

Syntax

static-sa *sa-name* [create]

no static-sa

Context

config>ipsec

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command configures an IPsec static security association (SA).

The **no** form of this command removes the configuration.

Parameters

sa-name

Specifies the SA name, up to 32 characters.

create

Mandatory keyword to create an SA instance.

authentication

Syntax

authentication *auth-algorithm* **ascii-key** *ascii-string*

authentication *auth-algorithm* **hex-key** *hex-string* [**hash** | **hash2**]

no authentication

Context

config>ipsec>static-sa

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command configures the authentication algorithm to use for an IPsec manual SA.

The **no** form of this command removes the configuration.

Default

no authentication

Parameters

auth-algorithm

Specifies the authentication algorithm.

Values **sha1** — The authentication protocol can be either HMAC-MD5-96 or HMAC-SHA-96.

md5 — The authentication protocol can either be HMAC-MD5-96 or HMAC-SHA-96.

ascii-string

Specifies the ASCII key, up to 16 characters for **md5** and 20 characters for **sha1**.

The authentication key is stored an encrypted format. The minimum key length is configured using the **config>system>security>password>minimum-length** command.

The complexity of the key is configured using the commands in the **config>system>security>password>complexity-rules** context.

hex-string

Specifies the hexadecimal key, up to 32 hexadecimal nibbles for **md5** and up to 40 hexadecimal nibbles for **sha1**.

hash

Keyword that stores all specified keys in encrypted format in the configuration file. The password must be entered in encrypted form when this keyword is configured. If this keyword is not configured, the key is assumed to be in a non-encrypted form.

hash2

Keyword to store the key in a more complex encrypted form. If this keyword is not used, the less encrypted **hash** form is assumed.

description

Syntax

description *description-string*

no description

Context

config>ipsec>static-sa

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command creates a text description, which is stored in the configuration file, to help identify the content of the entity. The **no** form of this command removes the string from the configuration.

Parameters

description-string

Specifies the description character string. Allowed values are any string up to 80 characters composed of printable, 7-bit ASCII characters. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed in double quotes.

direction

Syntax

direction *ipsec-direction*

no direction

Context

config>ipsec>static-sa

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command configures the direction for an IPsec manual SA.
The **no** form of this command reverts to the default value.

Default

direction bidirectional

Parameters

ipsec-direction
Specifies the direction.
Values inbound, outbound, bidirectional

protocol

Syntax

protocol *ipsec-protocol*
no protocol

Context

config>ipsec>static-sa

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command configures the security protocol to use for an IPsec manual SA.
The **no** form of this command reverts to the default value.

Default

protocol esp

Parameters

ipsec-protocol
Specifies the security protocol.
Values **ah** — Configures to Authentication Header Protocol.
esp — Configures the Encapsulation Security Payload Protocol.

spi

Syntax

spi *spi*

no spi

Context

config>ipsec>static-sa

Platforms

7210 SAS-K 2F6C4T and 7210 SAS-K 3SFP+ 8C

Description

This command configures the security parameter index (SPI) key value for an IPsec manual SA.

The **no** form of this command removes the configured SPI key value.

Parameters

spi

Specifies the SPI value.

Values 256 to 16383

2.9.2.2 Show commands

- [Security commands](#)
- [Login control](#)

2.9.2.2.1 Security commands

access-group

Syntax

access-group [*group-name*]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays SNMP access group information.

Parameters

group-name

Displays information for the specified access group.

Output

The following output is an example of SNMP access group information, and [Table 23: Output fields: access group](#) describes the output fields.

Sample output

```
A:ALA-4# show system security access-group
=====
Access Groups
=====
group name      security security read      write      notify
model          level      view      view      view
-----
snmp-ro         snmpv1     none      no-security      no-security
snmp-ro         snmpv2c    none      no-security      no-security
snmp-rw         snmpv1     none      no-security      no-security
snmp-rw         snmpv2c    none      no-security      no-security
snmp-rwa        snmpv1     none      iso              iso
snmp-rwa        snmpv2c    none      iso              iso
snmp-trap       snmpv1     none      iso              iso
snmp-trap       snmpv2c    none      iso              iso
=====
A:ALA-7#
```

Table 23: Output fields: access group

Label	Description
Group name	Displays the access group name
Security model	Displays the security model required to access the views configured in this node
Security level	Specifies the required authentication and privacy levels to access the views configured in this node
Read view	Specifies the variable of the view to read the MIB objects
Write view	Specifies the variable of the view to configure the contents of the agent
Notify view	Specifies the variable of the view to send a trap about MIB objects

authentication

Syntax

authentication [**statistics**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays system login authentication configuration and statistics.

Parameters

statistics

Appends login and accounting statistics to the display.

Output

The following output is an example of system login authentication information, and [Table 24: Output fields: security authentication](#) describes the output fields.

Sample output

```
A:ALA-4# show system security authentication
=====
Authentication                sequence : radius tacplus local
=====
server address  status  type   timeout(secs)  single connection  retry count
-----
10.10.10.103    up      radius 5              n/a              5
10.10.0.1       up      radius 5              n/a              5
10.10.0.2       up      radius 5              n/a              5
10.10.0.3       up      radius 5              n/a              5
-----
radius admin status : down
tacplus admin status : up
health check        : enabled
-----
No. of Servers: 4
=====

A:ALA-7>show>system>security# authentication statistics
=====
Authentication                sequence : radius tacplus local
=====
server address  status  type   timeout(secs)  single connection  retry count
-----
10.10.10.103    up      radius 5              n/a              5
10.10.0.1       up      radius 5              n/a              5
10.10.0.2       up      radius 5              n/a              5
```

```

10.10.0.3      up      radius 5      n/a      5
-----
radius admin status : down
tacplus admin status : up
health check       : enabled
-----
No. of Servers: 4
=====
Login Statistics
=====
server address      connection errors  accepted logins  rejected logins
-----
10.10.10.103        0                  0                0
10.10.0.1           0                  0                0
10.10.0.2           0                  0                0
10.10.0.3           0                  0                0
local               n/a                1                0
=====
Authorization Statistics (TACACS+)
=====
server address      connection errors  sent packets      rejected packets
-----
Accounting Statistics
=====
server address      connection errors  sent packets      rejected packets
-----
10.10.10.103        0                  0                0
10.10.0.1           0                  0                0
10.10.0.2           0                  0                0
10.10.0.3           0                  0                0
=====
A:ALA-7#

```

Table 24: Output fields: security authentication

Label	Description
Sequence	Displays the sequence in which authentication is processed
Server address	Displays the IP address of the RADIUS server
Status	Displays the current status of the RADIUS server
Type	Displays the authentication type
Timeout (secs)	Displays the number of seconds the router waits for a response from a RADIUS server
Single connection	Enabled — Specifies a single connection to the TACACS+ server and validates everything via that connection. Disabled — Specifies the TACACS+ protocol operation is disabled.
Retry count	Displays the number of times the router attempts to contact the RADIUS server for authentication if there are problems communicating with the server

Label	Description
Connection errors	Displays the number of times a user has attempted to login irrespective of whether the login succeeded or failed
Accepted logins	Displays the number of times the user has successfully logged in
Rejected logins	Displays the number of unsuccessful login attempts
Sent packets	Displays the number of packets sent
Rejected packets	Displays the number of packets rejected

keychain

Syntax

keychain [*key-chain*] [**detail**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays keychain information.

Parameters

key-chain

Specifies the keychain name to display.

detail

Displays detailed keychain information.

Output

The following output is an example of keychain information, and [Table 25: Output fields: keychain](#) describes the output fields.

Sample output

```
*A:ALA-A# show system security keychain test
=====
Key chain:test
=====
TCP-Option number send      : 254                Admin state   : Up
TCP-Option number receive   : 254                Oper state    : Up
=====
*A:ALA-A#
```

```
*A:ALA-A# show system security keychain test detail
=====
Key chain:test
=====
TCP-Option number send      : 254                Admin state   : Up
TCP-Option number receive   : 254                Oper state    : Up
=====
Key entries for key chain: test
=====
Id          : 0
Direction   : send-receive      Algorithm      : hmac-sha-1-96
Admin State  : Up                Valid          : Yes
Active       : Yes               Tolerance      : 300
Begin Time   : 2007/02/15 18:28:37 Begin Time (UTC) : 2007/02/15 17:28:37
End Time     : N/A               End Time (UTC)  : N/A
=====
Id          : 1
Direction   : send-receive      Algorithm      : aes-128-cmac-96
Admin State  : Up                Valid          : Yes
Active       : No               Tolerance      : 300
Begin Time   : 2007/02/15 18:27:57 Begin Time (UTC) : 2007/02/15 17:27:57
End Time     : 2007/02/15 18:28:13 End Time (UTC)  : 2007/02/15 17:28:13
=====
Id          : 2
Direction   : send-receive      Algorithm      : aes-128-cmac-96
Admin State  : Up                Valid          : Yes
Active       : No               Tolerance      : 500
Begin Time   : 2007/02/15 18:28:13 Begin Time (UTC) : 2007/02/15 17:28:13
End Time     : 2007/02/15 18:28:37 End Time (UTC)  : 2007/02/15 17:28:37
=====
*A:ALA-A#
```

Table 25: Output fields: keychain

Label	Description
TCP-Option number send	Displays the TCP option number to be inserted in the header of sent TCP packets
Admin state	Displays the administrative state of the keychain: up or down
TCP-Option number receive	Displays the TCP option number that is accepted in the header of received TCP packets
Oper state	Displays the operational state of the keychain: up or down
Key entries for key chain: test	
Id	Displays the ID of the key entry
Direction	Displays the stream direction on which keys are applied for this entry: send, receive, or send-receive
Algorithm	Displays the encryption algorithm to be used by this key entry
Option	Indicates the configured IS-IS encoding standard (indicates "none" if the associated protocol is not IS-IS)

Label	Description
Admin State	Displays the administrative state of the key entry: up or down
Valid	Indicates if the receive key is valid
Active	Indicates if the transmit (sent) key is active
Tolerance	Displays the tolerance time configured for support of both currently active and new keys
Begin Time	Displays the time at which the new key is used to sign and/or authenticate protocol packets
Begin Time (UTC)	Displays the begin time in UTC time
End Time	Displays the time at which the key is no longer eligible to authenticate protocol packets
End Time (UTC)	Displays the end time in UTC time

management-access-filter

Syntax

management-access-filter

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays management access filter information for IP filters.

ip-filter

Syntax

ip-filter [**entry** *entry-id*]

Context

show>system>security>mgmt-access-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays management-access IP filters.

Parameters

entry-id

Displays information for the specified entry.

Values 1 to 9999

Output

The following output is an example of management access IP filter information, and [Table 26: Output fields: IP filter](#) describes the output fields.

Sample output

```
*7210-SAS>show>system>security>management-access-filter# ip-filter entry 1

=====
IPv4 Management Access Filter
=====
filter type      : ip
Def. Action      : permit
Admin Status     : enabled (no shutdown)
-----
Entry            : 1
Description      : (Not Specified)
Src IP           : undefined
Src interface    : undefined
Dest port        : undefined
L4 Src port      : undefined
Fragment         : off
Protocol         : undefined
Router           : undefined
Action           : none
Log              : disabled
Matches          : 0
=====
*7210-SAS>show>system>security>management-access-filter#
```

Table 26: Output fields: IP filter

Label	Description
Def. action	Permit — Specifies that packets not matching the configured selection criteria in any of the filter entries are permitted Deny — Specifies that packets not matching the configured selection criteria in any of the filter entries are denied and that an ICMP host unreachable message will be issued Deny-host-unreachable — Specifies that packets not matching the configured selection criteria in the filter entries are denied
Entry	Displays the entry ID in a policy or filter table
Description	Displays a text string describing the filter

Label	Description
Src IP	Displays the source IP address used for management access filter match criteria
Src Interface	Displays the interface name for the next-hop to which the packet should be forwarded if it hits this filter entry
Dest port	Displays the destination port
Match	Displays the number of times a management packet has matched this filter entry
Protocol	Displays the IP protocol to match
Action	Displays the action to take for packets that match this filter entry
Flow label	Displays the flow label value to match
Next-header	Displays the IPv6 next header value to match
L4 Src port	Displays the TCP/UDP source port number to match
Fragment	Indicates whether the entry should match a fragment
Router	Displays the router instance ID to match
Log	Indicates if packet matching this entry must be logged or not. On 7210 SAS, platforms logging is not supported.

ipv6-filter

Syntax

ipv6-filter [**entry** *entry-id*]

Context

show>system>security>mgmt-access-filter

Platforms

Supported on all 7210 SAS platforms as described in this document, except 7210 SAS-K 2F1C2T

Description

This command displays management-access IPv6 filters.

Parameters

entry-id

Displays information for the specified entry.

Values 1 to 9999

Output

The following output is an example of management access IPV6 filter information, and [Table 27: Output fields: IPv6 filter](#) describes the output fields.

Sample output

```
A:7210SAS# show system security management-access-filter ipv6-filter

=====
IPv6 Management Access Filter
=====
filter type : ipv6
Def. Action : permit
Admin Status : enabled (no shutdown)
-----
Entry : 1
Description : (Not Specified)
Src IP : undefined
Flow label : undefined
Src interface : 1/1/1
Dest port : undefined
L4 Src port : undefined
Next-header : undefined
Router : undefined
Action : permit
Log : disabled
Matches : 0
=====
*A:7210SAS#
```

Table 27: Output fields: IPv6 filter

Label	Description
Def. action	Permit — Specifies that packets not matching the configured selection criteria in any of the filter entries are permitted Deny — Specifies that packets not matching the configured selection criteria in any of the filter entries are denied and that a ICMP host unreachable message will be issued Deny-host-unreachable — Specifies that packets not matching the configured selection criteria in the filter entries are denied
Entry	Displays the entry ID in a policy or filter table
Description	Displays a text string describing the filter
Src IP	Displays the source IPv6 address used for management access filter match criteria
Src Interface	Displays the interface name for the next-hop to which the packet should be forwarded if it hits this filter entry
Dest port	Displays the destination port

Label	Description
Flow label	Displays the flow label value to match
Protocol	Displays the IPv6 protocol to match
Action	Displays the action to take for packets that match this filter entry
Next-header	Displays the IPv6 next header value to match
L4 Src port	Displays the TCP/UDP source port number to match
Router	Displays the router instance ID to match
Log	Indicates if packet matching this entry must be logged or not. On 7210 SAS platforms, logging is not supported.

password-options

Syntax

password-options

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays configured password options.

Output

The following output is an example of configured password options information, and [Table 28: Output fields: password options](#) describes the output fields.

Sample output

```
A:ALA-7# show system security password-options
=====
Password Options
=====
Password aging in days                : none
Number of invalid attempts permitted per login : 3
Time in minutes per login attempt      : 5
Lockout period (when threshold breached) : 10
Authentication order                  : radius tacplus local
Configured complexity options          :
Minimum password length                 : 6
=====
A:ALA-7#
```

Table 28: Output fields: password options

Label	Description
Password aging in days	Displays the number of days a user password is valid before the user must change their password
Number of invalid attempts permitted per login	Displays the number of unsuccessful login attempts allowed for the specified time
Time in minutes per login attempt	Displays the period of time, in minutes, that a specified number of unsuccessful attempts can be made before the user is locked out
Lockout period (when threshold breached)	Displays the lockout period in minutes where the user is not allowed to login
Authentication order	Displays the sequence in which password authentication is attempted among RADIUS, TACACS+, and local passwords
Configured complexity options	Displays the complexity requirements of locally administered passwords, HMAC-MD5-96, HMAC-SHA-96, and DES-keys configured in the authentication section
Minimum password length	Displays the minimum number of characters required for locally administered passwords, HMAC-MD5-96, HMAC-SHA-96, and DES-keys configured in the system security section

profile

Syntax

profile [*profile-name*]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays user profile information.

If the *profile-name* is not specified, then information for all profiles are displayed.

Parameters

profile-name

Displays information for the specified user profile.

Output

The following output is an example of user profile information, and [Table 29: Output fields: security profile](#) describes the output fields.

Sample output

```
A:ALA-7# show system security profile administrative
=====
User Profile
=====
User Profile : administrative
Def. Action  : permit-all
-----
Entry       : 10
Description  :
Match Command: configure system security
Action      : permit
-----
Entry       : 20
Description  :
Match Command: show system security
Action      : permit
-----
No. of profiles:
=====
A:ALA-7#
```

Table 29: Output fields: security profile

Label	Description
User Profile	Displays the profile name used to deny or permit user console access to a hierarchical branch or to specific commands
Def. action	Permit all — Permits access to all commands Deny — Denies access to all commands None — No action is taken
Entry	Displays the entry ID in a policy or filter table
Description	Displays the text string describing the entry
Match Command	Displays the command or subtree commands in subordinate command levels
Action	Permit all — Commands matching the entry command match criteria are permitted Deny — Commands not matching the entry command match criteria are not permitted

Label	Description
No. of profiles	Displays the total number of profiles listed

source-address

Syntax

source-address

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays the source address configured for applications.

The 7210 SAS-K 2F1C2T does not support IPv6 source addresses.

Output

The following output is an example of source address information, and [Table 30: Output fields: source address](#) describes the output fields.

Sample output

```
A:SR-7# show system security source-address
=====
Source-Address applications
=====
Application          IP address/Interface Name          Oper status
-----
telnet               10.20.1.7                          Up
radius              loopback1                          Up
=====
A:SR-7#
```

Table 30: Output fields: source address

Label	Description
Application	Displays the source-address application
IP address Interface Name	Displays the source address IP address or interface name
Oper status	Up — The source address is operationally up Down — The source address is operationally down

ssh

Syntax

- ssh client-lists
- ssh server-lists
- ssh

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays all SSH sessions as well as the SSH status and fingerprint.

Parameters

- client-lists
Keyword to display the lists of cipher, MAC, KEX, and host key algorithms allowed by the SSH client.
- server-lists
Keyword to display the lists of cipher, MAC, KEX, and host key algorithms allowed by the SSH server.

Output

The following outputs are examples of SSH session information:

- Sample output: show system security ssh; Sample output: show system security ssh on the 7210 SAS-D; Table 31: Output fields: show system security ssh
- Sample output: SSH server and client lists; Table 32: Output fields: SSH server and client lists

Sample output: show system security ssh

```
A:Dut-A# show system security ssh

=====
SSH Server Global
=====
Administrative State      : Enabled
Operational State        : Up
Preserve Key              : Disabled

SSH Protocol Version 2    : Enabled
Host Key Fingerprints     :
  RSA                     : MD5:09:e3:e4:02:91:00:e4:41:a4:2d:dc:c4:87:4a:ad:fc
                           SHA256:XsjvyASijeSFQkfmkFz2fUIwz026HQzVoGxnebpsPU0
  ECDSA-SHA2-NISTP256     : MD5:1c:61:93:76:47:e8:cb:0d:90:97:fc:0d:c4:e7:39:cb
                           SHA256:N4F4mVCDbtNYldLR5kIw9M+IMVqa+SnyfULYj3muJRc
  ECDSA-SHA2-NISTP521     : MD5:87:21:c9:0a:a2:c1:a8:e4:a8:f4:65:e3:6c:40:36:ac
```



```

SHA256:sV1RtmzXrahdPBa1H0uIlat700gXtzs9kKfgiAKHtdU
=====
SSH Server Router Instance [BASE]
=====

-----
Connection                               Username
  Version      Cipher                     ServerName  Status
              MAC
              KEX
              HostKey
-----
No entries found

=====
SSH Server Router Instance [MANAGEMENT]
=====

-----
Connection                               Username
  Version      Cipher                     ServerName  Status
              MAC
              KEX
              HostKey
-----
192.168.8.8      2      aes128-ctr      admin
                  hmac-md5      cli            connected
                  diffie-hellman-group-exchange-sha1
                  ssh-rsa
-----
Number of SSH sessions : 1
A:Dut-A#

```

Sample output: show system security ssh on the 7210 SAS-D

```

A:Dut-A# show system security ssh

=====
SSH Server
=====
Administrative State      : Enabled
Operational State        : Up
Preserve Key              : Disabled

SSH Protocol Version 1    : Enabled
RSA Host Key Fingerprint : e5:15:4b:43:66:5d:ed:cd:71:3d:31:77:bc:a5:00:5e

SSH Protocol Version 2    : Enabled
DSA Host Key Fingerprint  : 68:6f:64:e1:bb:9d:db:3a:0f:6e:9f:b9:34:08:2f:91
RSA Host Key Fingerprint  : a1:b2:08:dd:59:2f:e6:1e:10:0c:3a:72:5d:0c:aa:1e

-----
Connection      Username      Version      Status
-----
192.168.47.8    admin        2            connected
-----
Number of SSH sessions : 1
=====

```

Table 31: Output fields: show system security ssh

Label	Description
Administrative State	Enabled — The SSH server functionality on the router is administratively enabled. By default, the functionality is enabled. Disabled — The SSH server functionality on the router is administratively disabled
Operational State	Up — The SSH server functionality is ready to accept inbound SSH connections Down — The SSH server functionality is not ready to accept inbound SSH connections
Preserve Key	Enabled — SSH host key persistence is enabled Disabled — SSH host key persistence is disabled. By default, the persistence is disabled.
SSH Protocol Version 2	Enabled — SSHv2 is enabled Disabled — SSHv2 is disabled SSHv2 is the only version supported for all platforms described in this document, except the 7210 SAS-D
Host Key Fingerprints	Displays the SSH host key fingerprints, which is the server identity. Clients trying to connect to the server verify the server fingerprint. If the server fingerprint cannot be validated, the client may not continue with the SSH session because the server may be spoofed.
Connection	Displays the IP address of the connected routers (remote client)
Version	Displays the SSH version used between the client and server
Cipher	Displays the name of the negotiated cipher algorithm used for the SSH session
MAC	Displays the name of the negotiated Hash-based Message Authentication Code (HMAC) algorithm for the SSH session
KEX	Displays the name of the negotiated KEX method used for the SSH session
HostKey	Displays the name of the negotiated cryptographic key algorithm used for the SSH session
Username	Displays the name of the user
ServerName	Displays the name of the subsystem using this SSH session (for example, CLI, SFTP, NETCONF)

Label	Description
Status	Connecting — The incoming SSH connection is still being authenticated Connected — When the authentication is completed and the connection is accepted by the SSH server
Number of SSH sessions	Displays the total number of active SSH sessions on the router

Sample output: SSH server and client lists

```
*A:Dut-A# show system security ssh client-lists

=====
SSH Client configurable algorithm lists
=====
SSHv2 Cipher List :
    aes256-ctr
    aes192-ctr
    aes128-ctr
    aes128-cbc
    3des-cbc
    aes192-cbc
    aes256-cbc
-----
SSHv2 MAC List :
    hmac-sha2-512
    hmac-sha2-256
    hmac-sha1
    hmac-sha1-96
    hmac-md5
    hmac-md5-96
-----
SSHv2 KEX List :
    ecdh-sha2-nistp521
    ecdh-sha2-nistp384
    ecdh-sha2-nistp256
    diffie-hellman-group16-sha512
    diffie-hellman-group14-sha256
    diffie-hellman-group14-sha1
    diffie-hellman-group-exchange-sha1
    diffie-hellman-group1-sha1
-----
SSHv2 Host Key List :
    ecdsa-sha2-nistp521
    ecdsa-sha2-nistp384
    ecdsa-sha2-nistp256
    rsa-sha2-512
    rsa-sha2-256
    ssh-ed25519
    ssh-rsa
=====
*A:Dut-A# show system security ssh server-lists

=====
SSH Server configurable algorithm lists
=====
SSHv2 Cipher List :
    aes256-ctr
```

```

aes192-ctr
aes128-ctr
aes128-cbc
3des-cbc
aes192-cbc
aes256-cbc
-----
SSHv2 MAC List      :
                    hmac-sha2-512
                    hmac-sha2-256
                    hmac-sha1
                    hmac-sha1-96
                    hmac-md5
                    hmac-md5-96
-----
SSHv2 KEX List      :
                    ecdh-sha2-nistp521
                    ecdh-sha2-nistp384
                    ecdh-sha2-nistp256
                    diffie-hellman-group16-sha512
                    diffie-hellman-group14-sha256
                    diffie-hellman-group14-sha1
                    diffie-hellman-group-exchange-sha1
                    diffie-hellman-group1-sha1
-----
SSHv2 Host Key List :
                    ecdsa-sha2-nistp521
                    ecdsa-sha2-nistp256
                    rsa-sha2-512
                    rsa-sha2-256
                    ssh-rsa
=====
```

Table 32: Output fields: SSH server and client lists

Label	Description
SSHv2 Cipher List	Displays the SSHv2 cipher list
SSHv2 MAC List	Displays the SSHv2 MAC list
SSHv2 KEX List	Displays the SSHv2 KEX list
SSHv2 Host Key List	Displays the SSHv2 host key list

user

Syntax
user [user-id] [detail]

Context
show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays user registration information.
By default, if no command line options are specified, summary information for all users displays.

Parameters

- user-id**
Displays information for the specified user, up to 32 characters.
- detail**
Displays detailed user information to the summary output.

Output

The following output is an example of user registration information, and [Table 33: Output fields: security user](#) describes the output fields.

Sample output

```
A:ALA-7# show system security user
=====
Users
=====
user id          need   user permissions password   attempted failed  local
                new pwd console ftp snmp  expires   logins   logins  conf
-----
admin            n     y     n  n     never     21      0      y
=====

A:ALA-7#

A:
ALA-7# show system security user detail
=====
Users
=====
user id          need   user permissions password   attempted failed  local
                new pwd console ftp snmp  expires   logins   logins  conf
-----
admin            n     y     n  n     never     21      0      y
=====

=====
User Configuration Detail
=====
user id          : admin
-----
console parameters
-----
new pw required  : no                cannot change pw : no
home directory   : cf1:\
restricted to home : no
login exec file  :
profile          : administrative
-----
```

```
snmp parameters
=====
A:ALA-7#
```

Table 33: Output fields: security user

Label	Description
User ID	Displays the name of a system user
Need new pwd	Y — The user must change their password at the next login
	N — The user is not forced to change their password at the next login
Cannot change pw	Y — The user has the ability to change the login password
	N — The user does not have the ability to change the login password
User permissions	Console Y — The user is authorized for console access N — The user is not authorized for console access FTP Y — The user is authorized for FTP access N — The user is not authorized for FTP access SNMP Y — The user is authorized for SNMP access N — The user is not authorized for SNMP access
Password expires	Displays the number of days in which the user must change their login password
Attempted logins	Displays the number of times the user has attempted to log in regardless of whether the login succeeded or failed
Failed logins	Displays the number of unsuccessful login attempts
Local conf	Y — Password authentication is based on the local password database N — Password authentication is not based on the local password database
Home directory	Specifies the local home directory for the user for both console and FTP access
Restricted to home	Yes — The user is not allowed to navigate to a directory higher in the directory tree on the home directory device

Label	Description
	No — The user is allowed to navigate to a directory higher in the directory tree on the home directory device
Login exec file	Displays the user login exec file, which executes whenever the user successfully logs in to a console session

view

Syntax

view [*view-name*] [**detail**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays the SNMP MIB views.

Parameters

view-name

Specifies the name of the view to display output, up to 32 characters. If no view name is specified, the complete list of views displays.

detail

Displays detailed view information.

Output

The following output is an example of SNMP MIB view information, and [Table 34: Output fields: security view](#) describes the output fields.

Sample output

```
A:ALA-48# show system security view
=====
Views
=====
view name      oid tree      mask          permission
-----
iso            1             11111111      included
read1          1.1.1.1       11111111      included
writel         2.2.2.2       11111111      included
testview       1             11111111      included
testview       1.3.6.1.2     11111111      excluded
mgmt-view      1.3.6.1.2.1.2 11111111      included
mgmt-view      1.3.6.1.2.1.4 11111111      included
mgmt-view      1.3.6.1.2.1.5 11111111      included
```

mgmt-view	1.3.6.1.2.1.6		included
mgmt-view	1.3.6.1.2.1.7		included
mgmt-view	1.3.6.1.2.1.31		included
mgmt-view	1.3.6.1.2.1.77		included
mgmt-view	1.3.6.1.4.1.6527.3.1.2.3.7		included
mgmt-view	1.3.6.1.4.1.6527.3.1.2.3.11		included
no-security	1		included
no-security	1.3.6.1.6.3		excluded
no-security	1.3.6.1.6.3.10.2.1		included
no-security	1.3.6.1.6.3.11.2.1		included
no-security	1.3.6.1.6.3.15.1.1		included
on-security	2	00000000	included

No. of Views:			
=====			
A:ALA-48#			

Table 34: Output fields: security view

Label	Description
view name	Displays the name of the view. Views control the accessibility of a MIB object within the configured MIB view and subtree.
oid tree	Displays the object identifier of the ASN.1 subtree
mask	Displays the bit mask that defines a family of view subtrees
permission	Indicates whether each view is included or excluded
No. of Views	Displays the total number of views

2.9.2.2.2 Login control

users

Syntax
users

Context
show

Platforms
Supported on all 7210 SAS platforms as described in this document

Description
This command displays console user login and connection information.

Output

The following output is an example of console user login and connection information, and [Table 35: Output fields: users](#) describes the output fields.

Sample output

```
A:ALA-7# show users
=====
User           Type      From      Login time      Idle time
=====
testuser       Console   --        21FEB2007 04:58:55  0d 00:00:00  A
-----
Number of users : 1
'A' indicates user is in admin mode
=====
A:ALA-7#
```

Table 35: Output fields: users

Label	Description
User	Displays the username
Type	Displays the access type that the user is authorized
From	Displays the originating IP address
Login time	Displays the time the user logged in
Idle time	Displays the amount of idle time for a specific login
Number of users	Displays the total number of users logged in

2.9.2.3 Debug commands

radius

Syntax

- radius
- no radius

Context

debug>router

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command enables debugging for RADIUS connections.

The **no** form of this command disables RADIUS debugging.

Default

no radius

detail-level

Syntax

detail-level {**low** | **medium** | **high**}

no detail-level

Context

debug>router>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the RADIUS debugging output detail level.

The **no** form of this command reverts to the default value.

Default

detail-level medium

Parameters

low

Specifies that the output include the packet type, server address, length, and RADIUS server policy name.

medium

Specifies that the output include the RADIUS attributes in the packets, in addition to all information included in low detail output.

high

Specifies that the output include hexadecimal packet dumps, in addition to all information included in medium and low detail output.

packet-type

Syntax

packet-type [**authentication**] [**accounting**] [**coa**]

no packet-type

Context

debug>router>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the RADIUS packet types to include in the RADIUS debugging output.

The **no** form of this command reverts to the default values.

Default

packet-type authentication accounting coa

Parameters

authentication

Specifies that RADIUS authentication packets should be included.

accounting

Specifies that RADIUS accounting packets should be included.

coa

Specifies that RADIUS change-of-authorization packets should be included.

radius-attr

Syntax

radius-attr type *attribute-type* [**transaction**]

radius-attr type *attribute-type* [**transaction**] {**address** | **hex** | **integer** | **string**} **value** *attribute-value*

radius-attr vendor *vendor-id* **type** *attribute-type* [**transaction**] [**encoding** *encoding-type*]

radius-attr vendor *vendor-id* **type** *attribute-type* [**transaction**] [**encoding** *encoding-type*] {**address** | **hex** | **integer** | **string**} **value** *attribute-value*

no radius-attr type *attribute-type*

no radius-attr type *attribute-type* {**address** | **hex** | **integer** | **string**} **value** *attribute-value*

no radius-attr vendor *vendor-id* **type** *attribute-type*

no radius-attr vendor *vendor-id* **type** *attribute-type* {**address** | **hex** | **integer** | **string**} **value** *attribute-value*

Context

debug>router>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the RADIUS attributes to include in medium or high detail RADIUS debugging output.

The **no** form of this command disables the inclusion of the specified attributes.

Parameters

address

Specifies that the *attribute-value* is an IPv4 or IPv6 address, prefix, or subnet.

attribute-type

Specifies the RADIUS attribute type.

Values 1 to 255

attribute-value

Specifies the value of the RADIUS attribute.

Values **address** — *ipv4-address*, *ipv6-address*, *ipv6-prefix/prefix-length*

ipv4-address — a.b.c.d

ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)

ipv6-prefix — x:x:x:x:x:x:x (eight 16-bit pieces)

x:x:x:d.d.d.d

x — 0 to FFFF (hexadecimal)

d — 0 to 255 (decimal)

prefix-length — 0 to 128 (7210 SAS-D, 7210 SAS-K 2F1C2T,
7210 SAS-K 2F6C4T, 7210 SAS-K 3SFP+ 8C)

0 to 64 (7210 SAS-Dxp)

hex — 0x0 to 0xFFFFFFFF (up to 506 hexadecimal nibbles)

integer — 0 to 4294967295

string — ASCII string up to 253 characters

encoding-type

Specifies the size of the vendor-type and vendor-length in bytes. The information is configured in the format xy, where x is the size of the vendor-type and y is the size of the vendor-length.

Values vendor-type — 1 to 4

vendor-length — 0 to 2

Default 11

hex

Specifies that the *attribute-value* is a binary string in hexadecimal format.

integer

Specifies that the *attribute-value* is an integer.

string

Specifies that the *attribute-value* is an ASCII string.

transaction

Specifies that the system outputs both request and response packets in the same session, even if the response packet does not include the filtered attributes.

vendor-id

Specifies the vendor ID for the vendor-specific attributes.

Values 0 to 16777215

server-address

Syntax

server-address *ip-address*

no server-address *ip-address*

Context

debug>router>radius

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the RADIUS server information to include in the RADIUS debugging output.

The **no** form of this command removes the specified RADIUS server from the RADIUS debugging output.

Parameters

ip-address

Specifies the IPv4 or IPv6 address of the RADIUS server.

Values *ipv4-address* — a.b.c.d

ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)

x:x:x:x:d.d.d.d

x — 0 to FFFF (hexadecimal)

d — 0 to 255 (decimal)

3 SNMP

This chapter provides information to configure SNMP.

3.1 SNMP overview

This section provides an overview of the Simple Network Management Protocol (SNMP).

3.1.1 SNMP architecture

The Service Assurance Manager (SAM) is composed of two elements: managers and agents. The manager is the entity through which network management tasks are facilitated. Agents interface managed objects. Managed devices, such as bridges, hubs, routers, and network servers can contain managed objects. A managed object can be a configuration attribute, performance statistic, or control action that is directly related to the operation of a device.

Managed devices collect and store management information and use Simple Network Management Protocol (SNMP). SNMP is an application-layer protocol that provides a message format to facilitate communication between SNMP managers and agents. SNMP provides a standard framework to monitor and manage devices in a network from a central location.

An SNMP manager controls and monitors the activities of network hosts which use SNMP. An SNMP manager can obtain (get) a value from an SNMP agent or store (set) a value in the agent. The manager uses definitions in the management information base (MIB) to perform operations on the managed device such as retrieving values from variables or blocks of data, replying to requests, and processing traps.

Between the SNMP agent and the SNMP manager the following actions can occur:

- The manager can get information from the agent.
- The manager can set the value of a MIB object that is controlled by an agent.
- The agent can send traps to notify the manager of significant events that occur on the router.

3.1.2 Management information base

An MIB is a formal specifications document with definitions of management information used to remotely monitor, configure, and control a managed device or network system. The agent's management information consists of a set of network objects that can be managed with SNMP. Object identifiers are unique object names that are organized in a hierarchical tree structure. The main branches are defined by the Internet Engineering Task Force (IETF). When requested, the Internet Assigned Numbers Authority (IANA) assigns a unique branch for use by a private organization or company. The branch assigned to Nokia (TiMetra) is 1.3.6.1.4.1.6527.

The SNMP agent provides management information to support a collection of IETF specified MIBs and a number of MIBs defined to manage device parameters and network data unique to the 7210 SAS.

3.1.3 SNMP protocol operations

Between the SNMP agent and the SNMP manager the following actions can occur:

- The manager can get information from the agent.
- The manager can set the value of a MIB object that is controlled by an agent.
- The agent notifies the manager of significant events that occur on the router.

3.1.4 SNMP versions

The agent supports multiple versions of the SNMP protocol as follows:

- SNMP Version 1 (SNMPv1) is the original Internet-standard network management framework.
- SNMPv1 uses a community string match for authentication.
- The implementation uses SNMPv2c, the community-based administrative framework for SNMPv2. SNMPv2c uses a community string match for authentication.
- In SNMP Version 3 (SNMPv3), USM defines the user authentication and encryption features. View Access Control MIB (VACM) defines the user access control features. The SNMP-COMMUNITY-MIB is used to associate SNMPv1/SNMPv2c community strings with SNMPv3 VACM access control.
- SNMPv3 uses a username match for authentication.

3.1.5 Management information access control

By default, the implementation of SNMP uses SNMPv3. SNMPv3 incorporates security model and security level features. A security model is the authentication type for the group and the security level is the permitted level of security within a security model. The combination of the security level and security model determines which security mechanism handles an SNMP packet.

To implement SNMPv1 and SNMPv2c configurations, several access groups are predefined. These access groups provide standard read-only, read-write, and read-write-all access groups and views that can be assigned community strings. To implement SNMP with security features, security models, security levels, and USM communities must be explicitly configured. Optionally, additional views which specify more specific OIDs (MIB objects in the subtree) can be configured.

Access to the management information in as SNMPv1/SNMPv2c agent is controlled by the inclusion of a community name string in the SNMP request. The community defines the sub-set of the agent managed objects can be accessed by the requester. It also defines what type of access is allowed: read-only or read-write.

The use of community strings provide minimal security and context checking for both agents and managers that receive requests and initiate trap operations. A community string is a text string that acts like a password to allow access to the agent on the router.

The Nokia implementation of SNMP has defined three levels of community-named access:

- **Read-Only permission**
Grants only read access to objects in the MIB, except security objects.
- **Read-Write permission**

Grants read and write access to all objects in the MIB, except security objects.

- **Read-Write-All permission**

Grants read and write access to all objects in the MIB, including security objects.

3.1.6 User-based security model community strings

User-based security model (USM) community strings associates a community string with an SNMPv3 access group and its view. The access granted with a community string is restricted to the scope of the configured group.

3.1.7 Views

Views control the access to a managed object. The total MIB of a router can be viewed as a hierarchical tree. When a view is created, either the entire tree or a portion of the tree can be specified and made available to a user to manage the objects contained in the subtree. Object identifiers (OIDs) uniquely identify managed objects. A view defines the type of operations for the view such as read, write, or notify.

OIDs are organized in a hierarchical tree with specific values assigned to different organizations. A view defines a subset of the agent's managed objects controlled by the access rules associated with that view.

Predefined views are available that are particularly useful when configuring SNMPv1 and SNMPv2c.

The Nokia SNMP agent associates SNMPv1 and SNMPv2c community strings with a SNMPv3 view.

3.1.8 Access groups

Access groups associate a user group and a security model to the views the group can access. An access group is defined by a unique combination of a group name, security model (SNMPv1, SNMPv2c, or SNMPv3), and security level (no-authorization-no privacy, authorization-no-privacy, or privacy).

An access group, in essence, is a template which defines a combination of access privileges and views. A group can be associated with one or more network users to control their access privileges and views.

Additional access parameters must be explicitly configured if the preconfigured access groups and views for SNMPv1 and SNMPv2c do not meet your security requirements.

3.1.9 Users

By default, authentication and encryption parameters are not configured. Authentication parameters which a user must use to be validated by the device can be modified. SNMP authentication allows the device to validate the managing node that issued the SNMP message and determine whether the message has been tampered with.

User access and authentication privileges must be explicitly configured. In a user configuration, a user is associated with an access group, which is a collection of users who have common access privileges and views (see [Access groups](#)).


3.2 Which SNMP version to use?

SNMPv1 and SNMPv2c do not provide security, authentication, or encryption. Without authentication, a non authorized user could perform SNMP network management functions and eavesdrop on management information as it passes from system to system. Many SNMPv1 and SNMPv2c implementations are restricted read-only access, which, in turn, reduces the effectiveness of a network monitor in which network control applications cannot be supported.

To implement SNMPv3, an authentication and encryption method must be assigned to a user to be validated by the device. SNMP authentication allows the router to validate the managing node that issued the SNMP message and determine whether the message was tampered with.

The following figure shows the configuration requirements to implement SNMPv1/SNMPv2c and SNMPv3.

Figure 5: SNMPv1 and SNMPv2c configuration and implementation flow

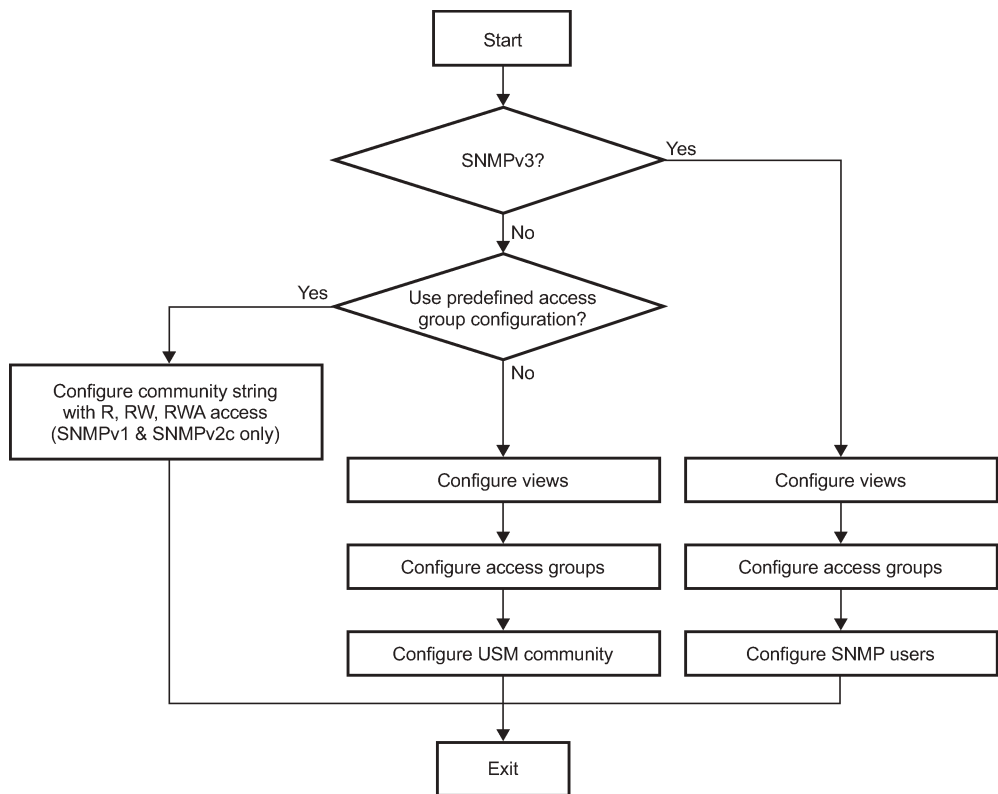

sw0500

3.3 Configuration notes

This section describes SNMP configuration guidelines and restrictions.

3.3.1 General

- To avoid management systems attempting to manage a partially booted system, SNMP remains in a shutdown state if the configuration file fails to complete during system startup. While shutdown, SNMP gets and sets are not processed. However, notifications are issued if an SNMP trap group has been configured.
- To enable SNMP, the portions of the configuration that failed to load must be initialized properly. Start SNMP with the **config>system>snmp>no shutdown** CLI command.
- Use caution when changing the SNMP engine ID. If the SNMP engine ID is changed in the **config>system>snmp>engineID engine-id** context, the current configuration must be saved and a reboot must be executed. If not, the previously configured SNMP communities and logger trap-target notify communities are not valid for the new engine ID.
- SNMP dying gasp uses system IP to send out packet. Therefore, the system IP must be configured before configuring SNMP dying gasp.



Note:

The SNMP dying gasp feature is not supported on the 7210 SAS-Dxp 16p and 7210 SAS-Dxp 24p.

3.4 Configuring SNMP with CLI

This section provides information about configuring SNMP with CLI.

3.4.1 SNMP configuration overview

This section describes how to configure SNMP components which apply to SNMPv1 and SNMPv2c, and SNMPv3 on the router.

3.4.1.1 Configuring SNMPv1 and SNMPv2c

Nokia routers are based on SNMPv3. To use the routers with SNMPv1 and/or SNMPv2c, SNMP community strings must be configured. Three predefined access methods are available when SNMPv1 or SNMPv2c access is required. Each access method (**r**, **rw**, or **rwa**) is associated with an SNMPv3 access group that determines the access privileges and the scope of managed objects available. The **community** command is used to associate a community string with a specific access method and the required SNMP version (SNMPv1 or SNMPv2c). The access methods are:

- **Read-Only**
Grants read only access to the entire management structure with the exception of the security area.
- **Read-Write**
Grants read and write access to the entire management structure with the exception of the security area.
- **Read-Write-All**

Grants read and write access to the entire management structure, including security.

If the predefined access groups do not meet your access requirements, then additional access groups and views can be configured. The **usm-community** command is used to associate an access group with an SNMPv1 or SNMPv2c community string.

SNMP trap destinations are configured in the **config>log>snmp-trap-group** context.

3.4.1.2 Configuring SNMPv3

By default, the 7210 SAS implements SNMPv3. If security features other than the default views are required, the following parameters must be configured:

- views
- access groups
- SNMP users

3.4.2 Basic SNMP security configuration

This section provides information to configure SNMP parameters and provides examples of common configuration tasks. The minimal SNMP parameters are:

For SNMPv1 and SNMPv2: configure community string parameters.

For SNMPv3:

- configure view parameters
- configure SNMP group
- configure access parameters
- configure user with SNMP parameters

Example: SNMP default views, access groups, and attempts parameters

```
A:ALA-1>config>system>security>snmp# info detail
-----
view iso subtree 1
  mask ff type included
exit
view no-security subtree 1
  mask ff type included
exit
view no-security subtree 1.3.6.1.6.3
  mask ff type excluded
exit
view no-security subtree 1.3.6.1.6.3.10.2.1
  mask ff type included
exit
view no-security subtree 1.3.6.1.6.3.11.2.1
  mask ff type included
exit
view no-security subtree 1.3.6.1.6.3.15.1.1
  mask ff type included
exit
access group snmp-ro security-model snmpv1 security-level no-auth-
no-privacy read no-security notify no-security
```

```

no-privacy read access group snmp-ro security-model snmpv2c security-level no-auth-
no-security notify no-security
no-privacy read access group snmp-rw security-model snmpv1 security-level no-auth-
no-security write no-security notify no-security
no-privacy read access group snmp-rw security-model snmpv2c security-level no-auth-
no-security write no-security notify no-security
no-privacy read access group snmp-rwa security-model snmpv1 security-level no-auth-
iso write iso notify iso
no-privacy read access group snmp-rwa security-model snmpv2c security-level no-auth-
iso write iso notify iso
no-privacy read access group snmp-trap security-model snmpv1 security-level no-auth-
no-privacy notify iso
no-privacy read access group snmp-trap security-model snmpv2c security-level no-
auth-no-privacy notify iso
attempts 20 time 5 lockout 10

```

3.4.3 Configuring SNMP components

Use the following syntax to configure the SNMP scenarios.

```

config>system>security>snmp
    access group group-name security-model security-model security-level security-level
    [context context-name [prefix-match]] [read view-name-1] [write view-name-2] [notify view-
    name-3]
    attempts [count] [time minutes1] [lockout minutes2]
    community community-string access-permissions [version SNMP version]
    usm-community community-string group group-name
    view view-name subtree oid-value
    mask mask-value [type {included|excluded}]

```

3.4.3.1 Configuring a community string

SNMPv1 and SNMPv2c community strings are used to define the relationship between an SNMP manager and agent. The community string acts like a password to allow access to the agent. The access granted with a community string is restricted to the scope of the configured group.

One or more of these characteristics associated with the string can be specified:

- Read-only, read-write, and read-write-all permission for the MIB objects accessible to the community.
- The SNMP version, SNMPv1 or SNMPv2c.

Default access features are preconfigured by the agent for SNMPv1/SNMPv2c.

Use the following CLI syntax to configure community options:

```

config>system>security>snmp
    community community-string access-permissions [version SNMP-version]

```

Example: SNMP community configuration

```

*A:cses-A13>config>system>security>snmp# info
-----
community "uTdc9j48PBRkxn5DcSjchk" hash2 rwa version both
community "Lla.RtAyRW2" hash2 r version v2c
community "r0a159kI0fg" hash2 r version both
-----
*A:cses-A13>config>system>security>snmp#

```

3.4.3.2 Configuring view options

Use the following CLI syntax to configure view options:

```
config>system>security>snmp
  view view-name subtree oid-value
    mask mask-value [type {included|excluded}]
```

Example: View configuration

```
*A:cses-A13>config>system>security>snmp# info
-----
      view "testview" subtree "1"
        mask ff
      exit
      view "testview" subtree "1.3.6.1.2"
        mask ff type excluded
      exit
      community "uTdc9j48PBRkxn5DcSjchk" hash2 rwa version both
      community "Lla.RtAyRW2" hash2 r version v2c
      community "r0a159kI0fg" hash2 r version both
-----
*A:cses-A13>config>system>security>snmp#
```

3.4.3.3 Configuring access options

The **access** command creates an association between a user group, a security model and the views that the user group can access. Access must be configured unless security is limited to the preconfigured access groups and views for SNMPv1 and SNMPv2. An access group is defined by a unique combination of the group name, security model and security level.

Use the following CLI syntax to configure access features:

```
config>system>security>snmp
  access group group-name security-model security-model security-level security-level
  [context context-name [prefix-match]] [read view-name-1] [write view-name-2] [notify view-name-3]
```

Example: Access configuration with the view configurations

```
*A:cses-A13>config>system>security>snmp# info
-----
      view "testview" subtree "1"
        mask ff
      exit
      view "testview" subtree "1.3.6.1.2"
        mask ff type excluded
      exit
      access group "test" security-model usm security-level auth-no-pr
      ivacy read "testview" write "testview" notify "testview"
      community "uTdc9j48PBRkxn5DcSjchk" hash2 rwa version both
      community "Lla.RtAyRW2" hash2 r version v2c
      community "r0a159kI0fg" hash2 r version both
-----
```

```
*A: cses-A13>config>system>security>snmp#
```

Use the following CLI syntax to configure user group and authentication parameters:

```
config>system>security# user user-name
    access [ftp] [snmp] [console]
    snmp
        authentication [none] | [[hash]{md5 key|sha key} privacy {none|des-key key}]
    group group-name
```

Example

The following displays a user's SNMP configuration example.

```
A:ALA-1>config>system>security# info
-----
user "testuser"
access snmp
snmp
authentication hash md5 e14672e71d3e96e7a1e19472527ee969 privacy none
group testgroup
exit
exit
...
-----
A:ALA-1>config>system>security#
```

3.4.3.4 Configuring USM community options

User-based security model (USM) community strings associate a community string with an SNMPv3 access group and its view. The access granted with a community string is restricted to the scope of the configured group.

By default, the implementation of SNMP uses SNMPv3. However, to implement SNMPv1 and SNMPv2c, USM community strings must be explicitly configured.

Use the following CLI syntax to configure USM community options:

```
config>system>security>snmp
    usm-community community-string group group-name
```

Example: SNMP community configuration

```
A:ALA-1>config>system>security>snmp# info
-----
view "testview" subtree "1"
    mask ff
    exit
    view "testview" subtree "1.3.6.1.2"
    mask ff type excluded
    exit
    access group "test" security-model usm security-level auth-no-pr
    ivacy read "testview" write "testview" notify "testview"
    community "uTdc9j48PBRkxn5DcSjchk" hash2 rwa version both
    community "Lla.RtAyRW2" hash2 r version v2c
    community "r0a159kI0fg" hash2 r version both
-----
A:ALA-1>config>system>security>snmp#
```

The group **grouptest** is configured in the **config>system>security>snmp> access** CLI context.

3.4.3.5 Configuring other SNMP parameters

Use the following CLI syntax to modify the system SNMP options:

```
config>system>snmp
  engineID engine-id
  general-port port
  packet-size bytes
  no shutdown
```

Example: System SNMP default values

```
A:ALA-104>config>system>snmp# info detail
-----
      shutdown
      engineID "0000xxxx0000000000xxxx00"
      packet-size 1500
      general-port 161
-----
A:ALA-104>config>system>snmp#
```

3.5 SNMP command reference

3.5.1 Command hierarchies

- [Configuration commands](#)
 - [SNMP system commands](#)
 - [SNMP security commands](#)
- [Show commands](#)

3.5.1.1 Configuration commands

3.5.1.1.1 SNMP system commands

```
config
- system
  - snmp
    - engineID engine-id
    - no engineID
    - general-port port
    - no general-port
    - packet-size bytes
    - no packet-size
    - [no] shutdown
```

3.5.1.1.2 SNMP security commands

```
config
- system
- security
- snmp
- access group group-name security-model security-model security-level
security-level [context context-name [prefix-match]] [read view-name-1] [write view-name-2]
[notify view-name-3]
- no access group group-name [security-model security-model] [security-level
security-level] [context context-name [prefix-match]] [read view-name-1] [write view-name-2]
[notify view-name-3]
- attempts [count] [time minutes1] [lockout minutes2]
- no attempts
- community community-string [hash | hash2] access-permissions [version SNMP-
version]
- no community community-string [hash | hash2]
- usm-community community-string [hash | hash2] group group-name
- no usm-community community-string [hash | hash2]
- view view-name subtree oid-value
- no view view-name [subtree oid-value]
- mask mask-value [type {included | excluded}]
- no mask
```

The following commands configure user-specific SNMP features. See the **Security** section for CLI syntax and command descriptions.

```
config
- system
- security
- [no] users user-name
- [no] snmp
- authentication {[none] | [[hash] {md5 key-1 | sha key-1} privacy
{privacy-level key-2}]}
- group group-name
- [no] group
```

3.5.1.2 Show commands

```
show
- snmp
- system
- information
- security
- access-group [group-name]
- authentication [statistics]
- keychain [key-chain] [detail]
- management-access-filter
- ip-filter [entry entry-id]
- password-options
- profile [profile-name]
- snmp
- community [community-string]
- ssh
- user [user-id] [detail]
- view [view-name] [detail]
```


3.5.2 Command descriptions

- [Configuration commands](#)
- [Show commands](#)

3.5.2.1 Configuration commands

- [SNMP system commands](#)
- [SNMP security commands](#)

3.5.2.1.1 SNMP system commands

snmp

Syntax

snmp

Context

config>system

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure SNMP parameters.

engineID

Syntax

[no] engineID *engine-id*

Context

config>system>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command sets the SNMP engineID to uniquely identify the SNMPv3 node. By default, the engineID is generated using information from the system backplane.

If SNMP engine ID is changed in the **config>system>snmp>engineID** context, the current configuration must be saved and a reboot must be executed. If not, the previously configured SNMP communities and logger trap-target notify communities are not valid for the new engine ID.



Note:

In conformance with IETF standard RFC 2274, *User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)*, hashing algorithms which generate SNMPv3 MD5 or SHA security digest keys use the engineID. Changing the SNMP engineID invalidates all SNMPv3 MD5 and SHA security digest keys and may render the node unmanageable.

When a chassis is replaced, use the engine ID of the first system and configure it in the new system to preserve SNMPv3 security keys. This allows management stations to use their existing authentication keys for the new system.

Ensure that the engine IDs are not used on multiple systems. A management domain can only have one instance of each engineID.

The **no** form of this command reverts to the default.

Default

the engine ID is system generated

Parameters

engine-id

Specifies an identifier from 10 to 64 hexadecimal digits (5 to 32 octet number), uniquely identifying this SNMPv3 node. This string is used to access this node from a remote host with SNMPv3.

general-port

Syntax

general-port *port-number*

no general-port

Context

config>system>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the port number used by this node to receive SNMP request messages and to send replies. SNMP notifications generated by the agent are sent from the port specified in the **config log snmp-trap-group trap-target** command.

The **no** form of this command reverts to the default value.

Default

161

Parameters

port-number

Specifies the port number used to send SNMP traffic other than traps.

Values 1 to 65535 (decimal)

packet-size

Syntax

packet-size *bytes*

no packet-size

Context

config>system>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the maximum SNMP packet size generated by this node. If the packet size exceeds the MTU size of the egress interface the packet is fragmented.

The **no** form of this command reverts to the default value.

Default

1500

Parameters

bytes

Specifies the SNMP packet size, in bytes.

Values 484 to 9216

shutdown

Syntax

[no] shutdown

Context

config>system>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command administratively disables SNMP agent operations. System management can then only be performed using the command line interface (CLI). Shutting down SNMP does not remove or change configuration parameters other than the administrative state. This command does not prevent the agent from sending SNMP notifications to any configured SNMP trap destinations. SNMP trap destinations are configured under the **config>log>snmp-trap-group** context.

This command is automatically invoked in the event of a reboot when the processing of the configuration file fails to complete or when an SNMP persistent index file fails while the **bof persist on** command is enabled.

The **no** form of this command administratively enables SNMP.

Default

no shutdown

3.5.2.1.2 SNMP security commands

snmp

Syntax

snmp

Context

config>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure SNMPv1, SNMPv2, and SNMPv3 parameters.

access

Syntax

[no] **access group** *group-name* **security-model** *security-model* **security-level** *security-level* [**context** *context-name* [**prefix-match**]] [**read** *view-name-1*] [**write** *view-name-2*] [**notify** *view-name-3*]

Context

config>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command creates an association between a user group, a security model, and the views that the user group can access. Access parameters must be configured unless security is limited to the preconfigured access groups and views for SNMPv1 and SNMPv2. An access group is defined by a unique combination of the group name, security model and security level.

Access must be configured unless security is limited to SNMPv1/SNMPv2c with community strings. See the [community](#) command for more information.

Default access group configurations cannot be modified or deleted.

Use the **no access group** *group-name* command to remove the user group with associated security models and security levels

Use the **no access group** *group-name* **security-model** {snmpv1 | snmpv2c | usm} **security-level** {no-auth-no-privacy | auth-no-privacy | privacy} command to remove a security model and security level combination from a group.

Parameters

group-name

Specifies a unique group name, up to 32 characters.

security-model {snmpv1 | snmpv2c | usm}

Specifies the security model required to access the views configured in this node. A group can have multiple security models. For example, one view may only require SNMPv1/SNMPv2c access while another view may require USM (SNMPv3) access rights.

security-level {no-auth-no-priv | auth-no-priv | privacy}

Specifies the required authentication and privacy levels to access the views configured in this node.

security-level no-auth-no-privacy

Specifies that no authentication and no privacy (encryption) is required. When configuring the user's authentication, select the **none** option.

security-level auth-no-privacy

Specifies that authentication is required but privacy (encryption) is not required. When this option is configured, both the **group** and the **user** must be configured for authentication.

security-level privacy

Specifies that both authentication and privacy (encryption) is required. When this option is configured, both the **group** and the user must be configured for **authentication**. The user must also be configured for **privacy**.

context context-name

Specifies a set of SNMP objects that are associated with the context-name. The *context-name* is treated as either a full context-name string or a context name prefix depending on the keyword specified (**exact** or **prefix**).

read *view-name*

Specifies the keyword and variable of the view to read the MIB objects. This command must be configured for each view to which the group has read access.

write *view-name*

Specifies the keyword and variable of the view to configure the contents of the agent, up to 32 characters. This command must be configured for each view to which the group has write access.

notify *view-name*

Specifies keyword and variable of the view to send a trap about MIB objects. This command must be configured for each view to which the group has notify access.

attempts

Syntax

attempts [*count*] [*time minutes1*] [*lockout minutes2*]

no attempts

Context

config>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a threshold value of unsuccessful SNMP connection attempts allowed in a specified time frame. The command parameters are used to counter denial of service (DOS) attacks through SNMP.

If the threshold is exceeded, the host is locked out for the lockout time period.

If multiple **attempts** commands are entered, each command overwrites the previously entered command.

The **no** form of this command reverts the parameters to the default values.

Default

attempts 20 time 5 lockout 10

Parameters

count

Specifies the number of unsuccessful SNMP attempts allowed for the specified time.

Values 1 to 64

Default 20

time *minutes1*

Specifies the period of time, in minutes, that a specified number of unsuccessful attempts can be made before the host is locked out.

Values 0 to 60

Default 5

lockout *minutes2*

Specifies the lockout period, in minutes, where the host is not allowed to login.

When the host exceeds the attempted count times in the specified time, that host is locked out from any further login attempts for the configured time period.

Values 0 to 1440

Default 10

community

Syntax

community *community-string* [**hash** | **hash2**] *access-permissions* [**version** *SNMP-version*]

no community *community-string*]

Context

config>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command creates SNMP community strings for SNMPv1 and SNMPv2c access. This command is used in combination with the predefined access groups and views. To create custom access groups and views and associate them with SNMPv1 or SNMPv2c access, use the **usm-community** command.

When configured, community implies a security model for SNMPv1 and SNMPv2c only.

For SNMPv3 security, the **access** command must be configured.

The **no** form of this command removes a community string.

Parameters

community-string

Specifies the SNMPv1 / SNMPv2c community string.

Values hash, hash2

access-permissions

Specifies the access permissions.

Values **r** — Grants only read access to objects in the MIB, except security objects.

rw — Grants read and write access to all objects in the MIB, except security.

rwa — Grants read and write access to all objects in the MIB, including security.

vpls-mgmt — Assigns a unique SNMP community string to the management virtual router.

version {v1 | v2c | both}

Keyword to configure the scope of the community string to be for SNMPv1, SNMPv2c, or both SNMPv1 and SNMPv2c access.

Default both

usm-community

Syntax

usm-community *community-string* [**hash** | **hash2**] **group** *group-name*

no usm-community *community-string* [**hash** | **hash2**]

Context

config>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command is used to associate a community string with an SNMPv3 access group and its view. The access granted with a community string is restricted to the scope of the configured group.

The Nokia implementation of SNMP uses SNMPv3. To implement SNMPv1 and SNMPv2c configurations, several access groups are predefined. To implement SNMP with security features (Version 3), security models, security levels, and USM communities must be explicitly configured. Optionally, additional views which specify more specific OIDs (MIB objects in the subtree) can be configured.

The **no** form of this command removes a community string.

Parameters

community-string

Specifies the SNMPv1/SNMPv2c community string to determine the SNMPv3 access permissions to be used.

Values hash, hash2

group

Specifies the group that governs the access rights of this community string. This group must be configured first in the **config>system>security>snmp>access>group** context.

view

Syntax

view *view-name* **subtree** *oid-value*

no view *view-name* [**subtree** *oid-value*]

Context

config>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures a view. Views control the accessibility of a MIB object within the configured MIB view and subtree. Object identifiers (OIDs) uniquely identify MIB objects in the subtree. OIDs are organized hierarchically with specific values assigned by different organizations.

After the subtree (OID) is identified, a mask can be created to select the portions of the subtree to be included or excluded for access using this particular view. See the [mask](#) command for more information. Views configured with this command can subsequently be used in read, write, and notify commands which are used to assign specific access group permissions to created views and assigned to particular access groups.

Multiple subtrees can be added or removed from a view name to tailor a view to the requirements of the user access group.

The **no view** *view-name* command removes a view and all subtrees.

The **no view** *view-name* **subtree** *oid-value* removes a sub-tree from the view name.

Parameters

view-name

Specifies a view name, up to 32 characters.

oid-value

Specifies the object identifier (OID) value for the *view-name*. This value, for example, 1.3.6.1.6.3.11.2.1, combined with the mask and include and exclude statements, configures the access available in the view.

It is possible to have a view with different subtrees with their own masks and include and exclude statements. This allows for customizing visibility and write capabilities to specific user requirements.

mask

Syntax

mask *mask-value* [**type** {**included** | **excluded**}]

no mask

Context

config>system>security>snmp>view

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configures the mask value and the mask type and, along with the *oid-value* configured in the **view** command, determines the access of each sub-identifier of an object identifier (MIB subtree) in the view.

Each bit in the mask corresponds to a sub-identifier position. For example, the most significant bit for the first sub-identifier, the next most significant bit for the second sub-identifier, and so on. If the bit position on the sub-identifier is available, it can be included or excluded.

For example, the MIB subtree that represents MIB-II is 1.3.6.1.2.1. The mask that catches all MIB-II would be 0xfc or 0b11111100.

Only a single mask may be configured per view and OID value combination. If more than one entry is configured, each subsequent entry overwrites the previous entry.

Per RFC 2575, *View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)*, each MIB view is defined by two sets of view subtrees, the included view subtrees and the excluded view subtrees. Every such view subtree, both the included and the excluded ones, are defined in this table. To determine whether a particular object instance is in a particular MIB view, compare the object instance's object identifier (OID) with each of the MIB view's active entries in this table. If none match, the object instance is not in the MIB view. If one or more match, the object instance is included in, or excluded from, the MIB view according to the value of `vacmViewTreeFamilyType` in the entry whose value of `vacmViewTreeFamilySubtree` has the most sub-identifiers.

The **no** form of this command removes the mask from the configuration.

Parameters

mask-value

Specifies the mask value associated with the OID value determines whether the sub-identifiers are included or excluded from the view. (Default: all 1s)

The mask can be entered in the following formats:

- hexadecimal, for example, 0xfc
- binary, for example, 0b11111100



Note:
If the number of bits in the bit mask is less than the number of sub-identifiers in the MIB subtree, the mask is extended with ones until the mask length matches the number of sub-identifiers in the MIB subtree.

type {included | excluded}

Specifies whether to include or exclude MIB subtree objects.

Values **included** — MIB subtree objects that are identified with a 1 in the mask are available in the view.
excluded — MIB subtree objects that are identified with a 1 in the mask are denied access in the view.

Default included

3.5.2.2 Show commands

information

Syntax
information

Context
show>system

Platforms
Supported on all 7210 SAS platforms as described in this document

Description
This command displays the SNMP configuration and statistics.

Output
The following output is an example of SNMP configuration and statistics information, and [Table 36: Output fields: system information](#) describes the output fields.

Sample output

```
Sample output for 7210 SAS D:

*A:SAS-D>show>system# information

=====
System Information
=====
System Name       : SAS-D
System Type       : 7210 SAS-D 6F4T-1
System Version    : B-3.0.S66
System Contact    :
```

```

System Location      :
System Coordinates   :
System Up Time       : 10 days, 01:24:01.43 (hr:min:sec)

SNMP Port            : 161
SNMP Engine ID       : 0000197f0000003f11abca11
SNMP Max Message Size : 1500
SNMP Admin State     : Disabled
SNMP Oper State      : Disabled
SNMP Index Boot Status : Not Persistent
SNMP Sync State      : N/A

Tel/Tel6/SSH/FTP Admin : Disabled/Disabled/Enabled/Disabled
Tel/Tel6/SSH/FTP Oper  : Down/Down/Up/Down

BOF Source           : N/A
Image Source         : primary
Config Source        : N/A
Last Booted Config File: N/A
Last Boot Cfg Version : N/A
Last Boot Config Header: N/A
Last Boot Index Version: N/A
Last Boot Index Header : N/A
Last Saved Config    : cfl:\smitha.cfg
Time Last Saved      : 1970/01/01 00:04:11
Changes Since Last Save: Yes
User Last Modified   : admin
Time Last Modified   : 1970/01/11 00:44:21
Max Cfg/BOF Backup Rev : 5
Cfg-OK Script        : N/A
Cfg-OK Script Status : not used
Cfg-Fail Script       : N/A
Cfg-Fail Script Status : not used

Management IP Addr   : 0.0.0.0/0
Primary DNS Server    : N/A
Secondary DNS Server  : N/A
Tertiary DNS Server   : N/A
DNS Domain            :
DNS Resolve Preference : ipv4-only
BOF Static Routes     : None
=====
*A:SAS-D>show>system#

```

Table 36: Output fields: system information

Label	Description
System Name	The name configured for the device
System Contact	The text string that identifies the contact name for the device
System Location	The text string that identifies the location of the device
System Coordinates	The text string that identifies the system coordinates for the device location For example, "37.390 -122.0550" is read as latitude 37.390 north and longitude 122.0550 west.

Label	Description
System Up Time	The time since the last reboot
SNMP Port	The port which SNMP sends responses to management requests
SNMP Engine ID	The ID for either the local or remote SNMP engine to uniquely identify the SNMPv3 node
SNMP Max Message Size	The maximum size SNMP packet generated by this node
SNMP Admin State	Enabled — SNMP is administratively enabled Disabled — SNMP is administratively disabled
SNMP Oper State	Enabled — SNMP is operationally enabled Disabled — SNMP is operationally disabled
SNMP Index Boot Status	Persistent — Persistent indexes at the last system reboot was enabled Disabled — Persistent indexes at the last system reboot was disabled
SNMP Sync State	The state when the synchronization of configuration files between the primary and secondary s finish
Telnet/SSH/FTP Admin	Displays the administrative state of the Telnet, SSH, and FTP sessions
Telnet/SSH/FTP Oper	Displays the operational state of the Telnet, SSH, and FTP sessions
BOF Source	The boot location of the BOF
Image Source	primary — Specifies whether the image was loaded from the primary location specified in the BOF secondary — Specifies whether the image was loaded from the secondary location specified in the BOF tertiary — Specifies whether the image was loaded from the tertiary location specified in the BOF
Config Source	primary — Specifies whether the configuration was loaded from the primary location specified in the BOF secondary — Specifies whether the configuration was loaded from the secondary location specified in the BOF tertiary — Specifies whether the configuration was loaded from the tertiary location specified in the BOF
Last Booted Config File	Displays the URL and filename of the configuration file used for the most recent boot

Label	Description
Last Boot Cfg Version	Displays the version of the configuration file used for the most recent boot
Last Boot Config Header	Displays header information of the configuration file used for the most recent boot
Last Boot Index Version	Displays the index version used in the most recent boot
Last Boot Index Header	Displays the header information of the index used in the most recent boot
Last Saved Config	Displays the filename of the last saved configuration
Time Last Saved	Displays the time the configuration was most recently saved
Changes Since Last Save	Yes — The configuration changed since the last save No — The configuration has not changed since the last save
Time Last Modified	Displays the time of the last modification
Max Cfg/BOF Backup Rev	The maximum number of backup revisions maintained for a configuration file This value also applies to the number of revisions maintained for the BOF.
Cfg-OK Script	URL — The location and name of the CLI script file executed following successful completion of the boot-up configuration file execution N/A — No CLI script file is executed
Cfg-OK Script Status	Successful/Failed — The results from the execution of the CLI script file specified in the Cfg-OK Script location Not used — No CLI script file was executed
Cfg-Fail Script	URL — The location and name of the CLI script file executed following a failed boot-up configuration file execution Not used — No CLI script file was executed
Cfg-Fail Script Status	Successful/Failed — The results from the execution of the CLI script file specified in the Cfg-Fail Script location Not used — No CLI script file was executed
Management IP address	The Management IP address of the node
DNS Server	The DNS address of the node

Label	Description
DNS Domain	The DNS domain name of the node
BOF Static Routes	To — The static route destination Next Hop — The next hop IP address used to reach the destination Metric — Displays the priority of this static route versus other static routes None — No static routes are configured

access-group

Syntax

access-group *group-name*

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays access-group information.

Output

The following output is an example of access group information, and [Table 37: Output fields: security access group](#) describes the output fields.

Sample output

```
A:ALA-1# show system security access-group
=====
Access Groups
=====
group name      security  security  read      write      notify
model          level    view      view      view
-----
snmp-ro         snmpv1   none      no-security      no-security
snmp-ro         snmpv2c  none      no-security      no-security
snmp-rw         snmpv1   none      no-security      no-security
snmp-rw         snmpv2c  none      no-security      no-security
snmp-rwa        snmpv1   none      iso             iso
snmp-rwa        snmpv2c  none      iso             iso
snmp-trap       snmpv1   none                        iso
snmp-trap       snmpv2c  none                        iso
-----
No. of Access Groups: 8
=====
A:ALA-1#
```

```
A:ALA-1# show system security access-group detail
=====
Access Groups
=====
group name      security  security  read      write      notify
model           level     view      view      view
-----
snmp-ro         snmpv1    none      no-security          no-security
-----
No. of Access Groups:
...
=====
A:ALA-1#
```

Table 37: Output fields: security access group

Label	Description
Group name	The access group name
Security model	The security model required to access the views configured in this node
Security level	Specifies the required authentication and privacy levels to access the views configured in this node
Read view	Specifies the view to read the MIB objects
Write view	Specifies the view to configure the contents of the agent
Notify view	Specifies the view to send a trap about MIB objects
No. of access groups	The total number of configured access groups

authentication

Syntax

authentication [statistics]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays authentication information.

Output

The following output is an example of authentication information, and [Table 38: Output fields: authentication](#) describes the output fields.

Sample output

```
A:ALA-49>show>system>security# authentication
=====
Authentication                sequence : radius tacplus local
=====
server address  status  type    timeout(secs)  single connection  retry count
-----
10.10.10.103    up      radius  5              n/a                5
10.10.0.1       up      radius  5              n/a                5
10.10.0.2       up      radius  5              n/a                5
10.10.0.3       up      radius  5              n/a                5
-----
radius admin status : down
tacplus admin status : up
health check        : enabled
-----
No. of Servers: 4
=====
A:ALA-49>show>system>security#
```

Table 38: Output fields: authentication

Label	Description
sequence	The authentication order in which password authentication, authorization, and accounting is attempted among RADIUS, TACACS+, and local passwords
server address	The address of the RADIUS, TACACS+, or local server
status	The status of the server
type	The type of server
timeout (secs)	Number of seconds the server waits before timing out
single connection	Specifies whether a single connection is established with the server The connection is kept open and is used by all the Telnet/SSH/FTP sessions for AAA operations.
retry count	The number of attempts to retry contacting the server
radius admin status	The administrative status of the RADIUS protocol operation
tacplus admin status	The administrative status of the TACACS+ protocol operation
health check	Specifies whether the RADIUS and TACACS+ servers are periodically monitored Each server is contacted every 30 seconds. If in this process a server is found to be unreachable, or a previously unreachable

Label	Description
	server starts responding, based on the type of the server, a trap is sent.
No. of Servers	The total number of servers configured

keychain

Syntax

keychain [*key-chain*] [**detail**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays keychain information.

Parameters

key-chain

Specifies the keychain name to display.

detail

Displays detailed keychain information.

Output

The following output is an example of keychain information.

Sample output

```
*A:ALA-A# show system security keychain test
=====
Key chain:test
=====
TCP-Option number send : 254 Admin state : Up
TCP-Option number receive : 254 Oper state : Up
=====
*A:ALA-A#
```

management-access-filter

Syntax

management-access-filter

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays management access filter information for IP and MAC filters.

ip-filter

Syntax

ip-filter [entry entry-id]

Context

show>system>security>mgmt-access-filter

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays management-access IP filters.

Parameters

entry-id

Displays information for the specified entry.

Values 1 to 9999

Output

The following output is an example of management access IP filter information, and [Table 39: Output fields: IP filter](#) describes the output fields.

Sample output

```
*7210-SAS>show>system>security>management-access-filter# ip-filter entry 1

=====
IPv4 Management Access Filter
=====
filter type      : ip
Def. Action      : permit
Admin Status     : enabled (no shutdown)
-----
Entry            : 1
Description      : (Not Specified)
Src IP           : undefined
Src interface    : undefined
```

```

Dest port      : undefined
Protocol       : undefined
Router        : undefined
Action        : none
Log           : disabled
Matches       : 0
=====
*7210-SAS>show>system>security>management-access-filter#

```

Table 39: Output fields: IP filter

Label	Description
Def. action	Permit — Specifies that packets not matching the configured selection criteria in any of the filter entries are permitted Deny — Specifies that packets not matching the configured selection criteria in any of the filter entries are denied and that a ICMP host unreachable message will be issued Deny-host-unreachable — Specifies that packets not matching the configured selection criteria in the filter entries are denied
Entry	The entry ID in a policy or filter table
Description	A text string describing the filter
Src IP	The source IP address used for management access filter match criteria
Src Interface	The interface name for the next-hop to which the packet should be forwarded if it hits this filter entry
Dest port	The destination port
Match	The number of times a management packet has matched this filter entry
Protocol	The IP protocol to match
Action	The action to take for packets that match this filter entry

password-options

Syntax

password-options

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays password options.

Output

The following output is an example of password options, and [Table 40: Output fields: password options](#) describes the output fields.

Sample output

```
A:ALA-48>show>system>security# password-options
=====
Password Options
=====
Password aging in days                : 365
Number of invalid attempts permitted per login : 5
Time in minutes per login attempt      : 5
Lockout period (when threshold breached) : 20
Authentication order                  : radius tacplus local
Configured complexity options          :
Minimum password length                : 8
=====
A:ALA-48>show>system>security#
```

Table 40: Output fields: password options

Label	Description
Password aging in days	Number of days a user password is valid before the user must change their password
Number of invalid attempts permitted per login	Displays the maximum number of unsuccessful login attempts allowed for a user
Time in minutes per login attempt	Displays the time in minutes that user is to be locked out
Lockout period (when threshold breached)	Displays the number of minutes the user is locked out if the threshold of unsuccessful login attempts has exceeded
Authentication order	Displays the most preferred method to authenticate and authorize a user
Configured complexity options	Displays the complexity requirements of locally administered passwords, HMAC-MD5-96, HMAC-SHA-96 and DES-keys configured in the authentication section
Minimum password length	Displays the minimum number of characters required in the password

profile

Syntax

profile [profile-name]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays user profiles for CLI command tree permissions.

Parameters

profile-name

Specifies the profile name to display information about a single user profile. If no profile name is displayed, the entire list of profile names are listed.

Output

The following output is an example of user profile information, and [Table 41: Output fields: profile](#) describes the output fields.

Sample output

```
A:ALA-48>config>system>snmp# show system security profile
=====
User Profile
=====
User Profile : test
Def. Action  : none
-----
Entry       : 1
Description :
Match Command:
Action      : unknown
=====
User Profile : default
Def. Action  : none
-----
Entry       : 10
Description :
Match Command: exec
Action      : permit
-----
Entry       : 20
Description :
Match Command: exit
Action      : permit
-----
Entry       : 30
Description :
```

```

Match Command: help
Action       : permit
-----
...
-----
Entry       : 80
Description :
Match Command: enable-admin
Action      : permit
=====

User Profile : administrative
Def. Action  : permit-all
-----
Entry       : 10
Description :
Match Command: configure system security
Action      : permit
-----
Entry       : 20
Description :
Match Command: show system security
Action      : permit
=====

No. of profiles: 3
=====
A:ALA-48>config>system>snmp#

```

Table 41: Output fields: profile

Label	Description
User Profile	default — The action to be given to the user profile if none of the entries match the command administrative — Specifies the administrative state for this profile
Def. Action	none — No action is given to the user profile when none of the entries match the command permit-all — The action to be taken when an entry matches the command
Entry	10 to 80 — Each entry represents the configuration for a system user
Description	A text string describing the entry
Match Command	administrative — Enables the user to execute all commands configure system security — Enables the user to execute the config system security command enable-admin — Enables the user to enter a special administrative mode by entering the enable-admin command exec — Enables the user to execute (exec) the contents of a text file as if they were CLI commands entered at the console exit — Enables the user to execute the exit command

Label	Description
	help — Enables the user to execute the help command logout — Enables the user to execute the logout command password — Enables the user to execute the password command show config — Enables the user to execute the show config command show — Enables the user to execute the show command show system security — Enables the user to execute the show system security command
Action	permit — Enables the user access to all commands deny-all — Denies the user access to all commands

snmp

Syntax

snmp

Context

show

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context displays SNMP information.

community

Syntax

community

community *community-string*

Context

show>system>security>snmp

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command lists SNMP communities and characteristics.

Parameters

community-string

Specifies the community name, up to 32 characters.

Output

The following output is an example of SNMP community information, and [Table 42: Output fields: SNMP community](#) describes the output fields.

Sample output

```
A:Dut-P# show system security snmp community
=====
Communities
=====
community      access  view          version  group name
-----
cli-readonly    r       iso           v2c      cli-readonly
cli-readwrite   rw      iso           v2c      cli-readwrite
private         rwa     iso           v1 v2c   snmp-rwa
public          rwa     iso           v1 v2c   snmp-rwa
-----
No. of Communities: 4
=====
A:Dut-P#
```

Table 42: Output fields: SNMP community

Label	Description
Community	Displays the community string name for SNMPv1 and SNMPv2c access only
Access	r — The community string allows read-only access rw — The community string allows read-write access rwa — The community string allows read-write access mgmt — The unique SNMP community string assigned to the management router
View	Displays the view name
Version	Displays the SNMP version
Group Name	Displays the access group name
No of Communities	Displays the total number of configured community strings

ssh

Syntax
ssh

Context
show>system>security

Platforms
Supported on all 7210 SAS platforms as described in this document

Description
This command displays all the SSH sessions as well as the SSH status and fingerprint.

Output
The following output is an example of SSH session information, and [Table 43: Output fields: SSH](#) describes the output fields.
Sample output

```
A:ALA-7# show system security ssh
SSH is enabled
Key fingerprint: 34:00:f4:97:05:71:aa:b1:63:99:dc:17:11:73:43:83
=====
Connection Encryption Username
=====
192.168.5.218 3des admin
-----
Number of SSH sessions : 1
=====
A:ALA-7#

A:ALA-49>config>system>security# show system security ssh
SSH is disabled

A:ALA-49>config>system>security#
```

Table 43: Output fields: SSH

Label	Description
SSH status	SSH is enabled — Displays that SSH server is enabled
	SSH is disabled — Displays that SSH server is disabled
Key fingerprint	The key fingerprint is the server identity. Clients trying to connect to the server verify the server fingerprint. If the server fingerprint is not known, the client may not continue with the SSH session because the server might be spoofed.

Label	Description
Connection	The IP address of the connected routers (remote client)
Encryption	des — Data encryption using a private (secret) key 3des — An encryption method that allows proprietary information to be transmitted over untrusted networks
Username	The name of the user
Number of SSH sessions	The total number of SSH sessions

user

Syntax

users [*user-id*] [**detail**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays user information.

Output

The following output is an example of user information, and [Table 44: Output fields: security user](#) describes the output fields.

Sample output

```
A:ALA-1# show system security user
=====
Users
=====
user id          need   user permissions  password  attempted  failed  local
new pwd  console ftp snmp  expires  logins   logins   conf
-----
admin           n      y      n  n    never     2        0        y
testuser        n      n      n  y    never     0        0        y
-----
Number of users : 2
=====
A:ALA-1#
```

Table 44: Output fields: security user

Label	Description
User ID	The name of a system user
Need New PWD	Yes — The user must change their password at the next login No — The user is not forced to change their password at the next login
User Permission	Console — Specifies whether the user is permitted console/ Telnet access FTP — Specifies whether the user is permitted FTP access SNMP — Specifies whether the user is permitted SNMP access
Password expires	The date on which the current password expires
Attempted logins	The number of times the user has attempted to login irrespective of whether the login succeeded or failed
Failed logins	The number of unsuccessful login attempts
Local Conf.	Y — Password authentication is based on the local password database N — Password authentication is not based on the local password database

view

Syntax

view [*view-name*] [**detail**]

Context

show>system>security

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command lists one or all views and permissions in the MIB-OID tree.

Output

The following output is an example of permissions views, and [Table 45: Output fields: security view](#) describes the output fields.

Sample output

```
A:ALA-1# show system security view
=====
Views
=====
view name      oid tree      mask      permission
-----
iso            1             included
no-security    1             included
no-security    1.3.6.1.6.3   excluded
no-security    1.3.6.1.6.3.10.2.1 included
no-security    1.3.6.1.6.3.11.2.1 included
no-security    1.3.6.1.6.3.15.1.1 included
-----
No. of Views: 6
=====
A:ALA-1#
```

```
A:ALA-1# show system security view no-security detail
=====
Views
=====
view name      oid tree      mask      permission
-----
no-security    1             included
no-security    1.3.6.1.6.3   excluded
no-security    1.3.6.1.6.3.10.2.1 included
no-security    1.3.6.1.6.3.11.2.1 included
no-security    1.3.6.1.6.3.15.1.1 included
-----
No. of Views: 5
=====
no-security used in
=====
group name
-----
snmp-ro
snmp-rw
=====
A:ALA-1#
```

Table 45: Output fields: security view

Label	Description
View name	The name of the view Views control the accessibility of a MIB object within the configured MIB view and subtree.
OID tree	The Object Identifier (OID) value OIDs uniquely identify MIB objects in the subtree.
Mask	The mask value and the mask type, along with the <i>oid-value</i> configured in the view command, determines the access of each sub-identifier of an object identifier (MIB subtree) in the view.

Label	Description
Permission	Included — Specifies to include MIB subtree objects Excluded — Specifies to exclude MIB subtree objects
No. of Views	The total number of configured views
Group name	The access group name

4 NETCONF



Note:

This feature is only supported on the 7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T.

This chapter describes the use of the Network Configuration Protocol (NETCONF) by the SR OS router to perform router management operations.


4.1 NETCONF overview

NETCONF is a standardized IETF configuration management and XML encoded protocol that can be used as an alternative to CLI or SNFMP to manage the SR OS routers. NETCONF is defined in RFC 6241, *NETCONF Configuration Protocol (NETCONF)*. It is secure and connection-oriented, and can run over the SSHv2 transport protocol, in accordance with RFC 6242, *Using the NETCONF Configuration Protocol over Secure Shell (SSH)*.

NETCONF uses Remote Procedure Call (RPC) messaging to facilitate communication between a NETCONF client and the NETCONF server that is running on the SR OS node. The RPC message and configuration data is encoded in an XML document. These XML documents are exchanged between the NETCONF client and a NETCONF server in a series of request and response type of messaging interactions. The SR OS NETCONF interface supports both configuration support and retrieval of operational information.


The following figure shows a NETCONF RPC messaging request.

Figure 6: NETCONF RPC request

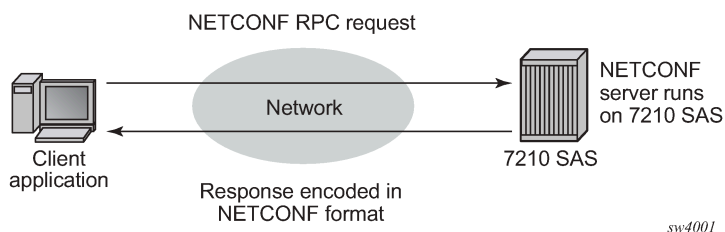

As defined in RFC 6241, NETCONF can be conceptually partitioned into four layers; these are shown in the following figure.

Figure 7: NETCONF layers (RFC 6241)

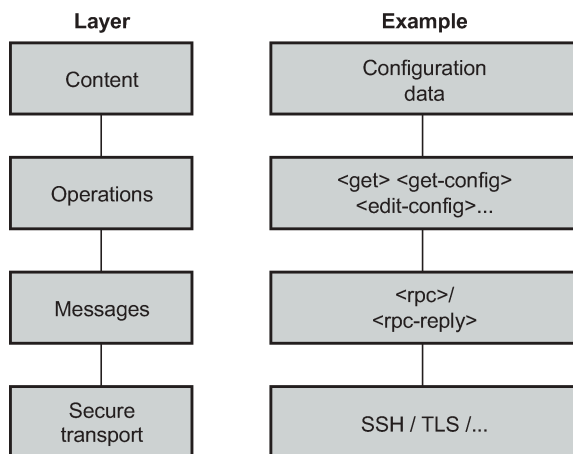

sw4000

4.2 NETCONF in SR OS

The SR OS router can use NETCONF to perform the following router management operations:

- change the router configuration using the <edit-config> operation
- read the router configuration using the <get-config> operation (equivalent to the **info** command in CLI)
- read operational status, data, and associated configuration information using the <get> operation (equivalent to the **show** commands in CLI)

NETCONF is not used to generate notifications on an SR OS router; for example, log events, syslog, or SNMP notifications (traps).

The equivalent of some **admin** commands are available through the SR OS NETCONF interface:

- **admin save** can be done using the <copy-config> operation
- **admin rollback** commands are supported using a CLI content layer <cli-action> RPC.

The **bof**, **debug**, **tools**, and other general CLI operational commands (for example, **telnet** or **ping**) are not supported through NETCONF on an SR OS router.

The SR OS NETCONF server supports both the base 1.1 and base 1.0 capabilities.

SR OS NETCONF supports both a CLI content layer and an XML-based content layer.

4.2.1 YANG data models

The SR OS NETCONF XML content layer configuration schema is described in a set of Alcatel-Lucent proprietary YANG modules. The configuration modules are advertised in the SR OS NETCONF server hello.

The configuration YANG data model closely aligns to the SR OS CLI configuration tree structure and commands.

A set of YANG modules are published and distributed as part of an SR OS image in the `cflash/support` directory (along with files like `dictionary-freeradius.txt` and `stats.dtd`).

The following areas of CLI do not have equivalent YANG data models:

- **bof**
- **admin**, **tools**, **debug**, or **show** branches

4.2.2 Transport and sessions

SSH transport for NETCONF is supported on TCP port 830 with IPv4 or IPv6 in the "Base" routing instance.

NETCONF SSH sessions (similar to CLI, Secure Copy (SCP), and SSH File Transfer Protocol (sFTP) sessions) are subject to any configurable and non-configurable session limits; for example, `inbound-max-sessions`. The SSH server and NETCONF protocol must be enabled in the router configuration to use NETCONF.

Unlike CLI sessions, NETCONF sessions are not subject to automatic session timeout. Operators can manually disconnect sessions using the **admin disconnect** command.

NETCONF user accounts must exist on the SR OS to enable a client establishing a NETCONF session to log into the router. A new access type **netconf** is provided. The user must be configured with both **console** and **netconf** access.

Only authentication through the local user database is supported for NETCONF users (no RADIUS or TACACS+ authentication). Access to various CLI configuration and **show** commands (authorization) through NETCONF is controlled through the assigned user profile that is used to authenticate the underlying SSH session.

If a NETCONF request attempts to execute a CLI command that is outside the scope of its access profile, the system sends an error response.

Example

The following example shows a user request where the **show** command usage is outside the scope of the user's access profile.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get>
    <filter>
      <oper-data-format-cli-block>
        <cli-show>system security</cli-show>
      </oper-data-format-cli-block>
    </filter>
  </get>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
```

```
<error-tag>operation-failed</error-tag>
<error-severity>error</error-severity>
<error-info>
  <err-element>cli-show</err-element>
</error-info>
<error-message>
  command failed - 'show system security'
  MINOR: CLI Command not allowed for this user.
</error-message>
</rpc-error>
</rpc-reply>
]]>]]>
```

4.2.3 NETCONF operations

The following base protocol operations are supported:

- <get>
- <get-config>
- <edit-config>
- <copy-config>
- <delete-config>
- <validate>
- <close-session>
- <kill-session>

The <lock> and <unlock> base protocol operations are not supported.

The <error-option> operation is not supported. SR OS implements the stop-on-error behavior by default. The continue-on-error and rollback-on-error behaviors are not supported.

4.2.3.1 <get>

CLI content layer <get> operation is supported. XML content layer <get> operation is not supported.

A <get> request is analyzed for syntax errors before it is executed. If a syntax error is found, a single global <rpc-error> for the entire request is sent in the reply.

Responses are provided for each item in the request until the first item with an error is found. A <response> tag containing the error information, followed by an <rpc-error> tag (and sub-tags) is attached to the erroneous item. The reply is returned, and no subsequent items are not executed.

For a non-syntax error, the <rpc-error> for an individual item is placed after the </response> information and not included in the <response> tag.

Example

The following example shows a <get> request with a non-syntax error in the second item.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get>
    <filter>
      <oper-data-format-cli-block>
```

```

                                <cli-show>router interface "system"</cli-show>
                                <cli-show>router mpls lsp</cli-show>
                                <cli-show>system security ssh</cli-show>
                                </oper-data-format-cli-block>
                            </filter>
                        </get>
                    </rpc>
                ]]>]]>

```

Example

The following example shows the reply.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <oper-data-format-cli-block>
      <item>
        <cli-show>router interface "system"</cli-show>
        <response>
          =====
          Interface Table (Router: Base)
          =====
          Interface-Name      Adm      Opr(v4/v6)  Mode      Port/SapId
          IP-Address          PfxState
          -----
          system              Up      Up/Down     Network   system
          144.23.63.5/32      n/a
          -----
          Interfaces : 1
          =====
        </response>
      </item>
      <item>
        <cli-show>router mpls lsp</cli-show>
        <response>
          MINOR: CLI MPLS is not configured.
        </response>
        <rpc-error>
          <error-type>application</error-type>
          <error-tag>operation-failed</error-tag>
          <error-severity>error</error-severity>
          <error-info>
            <err-element>cli-show</err-element>
          </error-info>
          <error-message>
            command failed - 'show router mpls lsp'
          </error-message>
        </rpc-error>
      </item>
    </oper-data-format-cli-block>
  </data>
</rpc-reply>
]]>]]>

```

4.2.3.2 <get-config>

The <get-config> operation returns non-default configuration by default (that is, the "trim" mode, as defined in RFC 6243).

4.2.3.3 <edit-config>

The following values for the <test-option> parameter under <edit-config> are supported:

- test-then-set
- set
- test-only

4.2.3.4 <copy-config> and <delete-config>

The <copy-config> and <delete-config> base protocol operations are supported for specific combinations of source and target datastores.

The <copy-config> operation is supported for the following combinations of sources and targets:

- <source>=<url> and <target>=<startup> (as long as both are not remote URLs)
- <source>=<startup> and <target>=<url> (as long as both are not remote URLs)
- <source>=<running> and <target>=<url>
 - equivalent of **admin save file-url**
 - an index file is also saved if **persist on** is configured in the BOF
- <source>=<running> and <target>=<startup>
 - equivalent of **admin save**
 - an index file is also saved if **persist on** is configured in the BOF

The <running> datastore cannot be a <target> for a <copy-config> operation.

Remote URL-to-remote URL copies are not supported. For example, if the primary-image is a remote URL, a <startup> to copy fails with an error.

The <copy-config> operation uses the CLI content layer format. The format of the source and target is block CLI.

The <delete-config> operation is supported for the following targets:

- <url>
- <startup>

The <delete-config> operation is not allowed on the <running> datastore.

4.2.3.5 <validate>

The following support is available for the validate:1.1 capability:

- The validate:1.1 and 1.0 capabilities are advertised in the NETCONF server <hello> as the following:
 - <capability>urn:ietf:params:netconf:capability:validate:1.0</capability>
 - <capability>urn:ietf:params:netconf:capability:validate:1.1</capability>
- The <validate> request is supported for an XML content layer request, but not for a CLI content layer request. Detection of a <config-format-cli-block> or <oper-data-format-cli-block> tag in a <validate> request results in an "operation not supported" error response.

- A <validate> operation is supported for a selection of config (<source><config>), or for the <running> datastore, which only returns 'OK'. The <validate> operation is not supported for URL sources or the <startup> datastore.

4.2.4 Datastores and URLs

The SR OS supports the following datastores:

- <running>
- <startup>
- <url>



Note:

<url> is not a datastore in itself.

The <candidate> datastore is not supported.

All configuration changes (<edit-config>) done to the <running> datastore through NETCONF take immediate operational effect.

The <startup> datastore and <url> tags can only be used with <copy-config> and <delete-config> and are not supported with any other operations (including <edit-config>, <get-config>, <get>, <validate>, and others).

The :startup capability is advertised in the SR OS NETCONF server <hello> as follows:

```
<capability>urn:ietf:params:netconf:capability:startup:1.0</capability>
```

The <url> tags support the same options as CLI <file-url>: local URLs (CF) and remote URLs (FTP and TFTP).

The :url capability is advertised in the SR OS NETCONF server <hello> as follows:

```
<capability>urn:ietf:params:netconf:capability:url:1.0?scheme=ftp,tftp,file</capability>
```

The following examples show the format of each URL scheme:



Note:

- The examples use "///" for the file URL.
- The file://localhost/... format is not supported.
- <target><url>ftp://name:passwd@a.b.c.d/usr/myfiles/myfile.cfg</url></target>
- <target><url>tftp://name:passwd@a.b.c.d/usr/myfiles/myfile.cfg</url></target>
- <target><url>file:///cf3:/myfiles/myfile.cfg</url></target>
- <target><url>cf3:/myfiles/myfile.cfg</url></target>

The <startup> datastore is identified by using the **bof primary-config**, **secondary-config**, and **tertiary-config** paths configured by the operator. The <startup> datastore is an alias for a special URL used for system startup with some extra resiliency (primary, secondary, and tertiary).

The BOF is not considered to be part of any configuration datastore.

Debug configurations (such as **debug mirrors**, or configurations saved using the **admin debug-save** command) are not considered to be part of any configuration datastore.

Configuration changes made through NETCONF are subject to CLI rollback operations (**revert**, **save**, and so on) and are included in the configuration when an **admin save** operation is performed in the CLI.

4.2.5 General NETCONF behavior

Use Ctrl-C in a NETCONF session to immediately terminate the session.

The SR OS NETCONF implementation does not support XML namespaces (xmlns). Any XML namespace or prefix declarations in the RPC tag are accepted and returned in the <rpc-reply> tag, but are ignored and unused. Any XML namespace or prefix declarations in the rest of the request are ignored and unused. The SR OS NETCONF server puts the correct NETCONF namespace declaration ("urn:ietf:params:xml:ns:netconf:base:1.0") in all replies. See the following sections for more information:

- [Example: multiple use of standard NETCONF namespace](#)
- [Example: non-standard namespace defined in <rpc> tag](#)
- [Example: non-standard namespace not defined in <rpc> tag](#)
- [Example: non-standard namespace or prefix not defined in <rpc> tag](#)

The chunked framing mechanism is supported in addition to the EOM mechanism. As described in RFC 6242, Section 4.1 - Framing Protocol, "... If the :base:1.1 capability is advertised by both peers, the chunked framing mechanism (see Section 4.2) is used for the remainder of the NETCONF session. Otherwise, the old end-of-message-based mechanism (see Section 4.3) is used." See [Example: chunked frame mechanism](#) for more information.

Default data handling (for example, **info** vs **info detail**) is supported in accordance with the mechanisms detailed in RFC 6243. The SR OS NETCONF server supports the "trim" method and advertises it in the <hello> as follows:

```
<capability>urn:ietf:params:netconf:capability:with-defaults:1.0?basic-mode=trim</capability>
```

Pseudo-transactional capabilities are supported. A user can save a rollback checkpoint (for example, before performing an <edit-config> or a series of <edit-config>) and, if required, later perform a rollback revert. See the following sections for more information:

- [Example: two rollback items with responses](#)
- [Example: syntax error in the rollback request](#)
- [Example: error in processing the request](#)
- [Example: error in second item of the request](#)

4.2.5.1 Example: multiple use of standard NETCONF namespace

Example

The following example shows the standard NETCONF namespace "urn:ietf:params:xml:ns:netconf:base:1.0" used more than once in the <rpc> element.

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<rpc message-id="101"
xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source> <running/> </source>
    <filter>
      <configure>
        <router>
          <interface>
            <interface-name>"system"</interface-name>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

Example

In the following reply, the namespace is accepted and no error message is returned.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-
id="101" xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0" xmlns="urn:ietf:params:
xml:ns:netconf:base:1.0">
  <data>
    <configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
      <router>
        <router-name>Base</router-name>
        <interface>
          <interface-name>system</interface-name>
          <address>
            <ip-address-mask>144.23.63.5/32</ip-address-mask>
          </address>
          <shutdown>false</shutdown>
        </interface>
      </router>
    </configure>
  </data>
</rpc-reply>
]]>]]>
```

4.2.5.2 Example: non-standard namespace defined in <rpc> tag

Example

The following example shows a non-standard NETCONF base namespace defined in the <rpc> tag.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
xmlns:alu="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
  <get-config>
    <source> <running/> </source>
    <filter>
      <configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
        <router>
          <interface>
            <interface-name>"system"</interface-name>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

```
        </interface>
      </router>
    </configure>
  </filter>
</get-config>
</rpc>
]]>]]>
```

Example

In the following reply, the non-standard namespace used in the <rpc> tag is ignored.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-
id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0" xmlns:alu="urn:alcatel-
lucent.com:sros:ns:yang:conf-r13">
  <data>
    <configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
      <router>
        <router-name>Base</router-name>
        <interface>
          <interface-name>system</interface-name>
          <address>
            <ip-address-mask>144.23.63.5/32</ip-address-mask>
          </address>
          <shutdown>false</shutdown>
        </interface>
      </router>
    </configure>
  </data>
</rpc-reply>
]]>]]>
```

4.2.5.3 Example: non-standard namespace not defined in <rpc> tag

Example

The following example shows a non-standard NETCONF namespace used in one of the tags, but not defined in the <rpc> tag.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source> <running/> </source>
    <filter>
      <configure>
        <router>
          <interface xmlns:alu="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
            <interface-name>"system"</interface-name>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```


Example

In the following reply, the non-standard namespace used in the tag is ignored.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-
id="101" xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0" xmlns="urn:ietf:params:
xml:ns:netconf:base:1.0">
  <data>
    <configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
      <router>
        <router-name>Base</router-name>
        <interface>
          <interface-name>system</interface-name>
          <address>
            <ip-address-mask>144.23.63.5/32</ip-address-mask>
          </address>
          <shutdown>false</shutdown>
        </interface>
      </router>
    </configure>
  </data>
</rpc-reply>
]]>]]>
```

4.2.5.4 Example: non-standard namespace or prefix not defined in <rpc> tag

Example

The following example shows a non-standard NETCONF namespace or prefix used in one of the tags but not defined in the <rpc> tag.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"
xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source> <running/> </source>
    <filter>
      <configure>
        <router>
          <interface xmlns:alu="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
            <alu:interface-name>"system"</alu:interface-name>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

Example

In the following reply, the non-standard namespace/prefix used in tag is ignored.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-
id="101" xmlns:alu="urn:ietf:params:xml:ns:netconf:base:1.0" xmlns="urn:ietf:params:
xml:ns:netconf:base:1.0">
  <data>
```

```
<configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
  <router>
    <router-name>Base</router-name>
    <interface>
      <interface-name>system</interface-name>
      <address>
        <ip-address-mask>144.23.63.5/32</ip-address-mask>
      </address>
      <shutdown>false</shutdown>
    </interface>
  </router>
</configure>
</data>
</rpc-reply>
]]>]]>
```

4.2.5.5 Example: chunked frame mechanism

Example

The following example shows a chunked message.

```
#302
<?xml version="1.0" encoding="UTF-8"?><rpc message-
id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0"><get-
config><source><running/></source><filter><config><configure><router><interface><interface-name>system</
interface-name></interface></router></configure></config></filter></get-config></
rpc>
##
```

Example

The following example shows the reply.

```
#38
<?xml version="1.0" encoding="UTF-8"?>
#85
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
#62
    <source><running/></source>
    <filter>
      <configure>
##79
        <system>
          <netconf>
            </netconf>
          </system>
##55
        </configure>
      </filter>
    </get-config>
  </rpc>
##
```

4.2.5.6 Example: two rollback items with responses

Example

The following example shows two rollback items with responses.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="102" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <cli-action>
    <admin>rollback compare active-cfg to 1</admin>
    <admin>rollback compare</admin>
  </cli-action>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="102" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <cli-action>
      <item>
        <admin>rollback compare active-cfg to 1</admin>
        <response>
0.150 s
0.450 s
-----
configure
router
-   mpls
-       shutdown
-       interface "system"
-         no shutdown
-       exit
-       lsp "test"
-         shutdown
-       exit
-     exit
-     rsvp
-       shutdown
-       interface "system"
-         no shutdown
-       exit
-     exit
-   exit
-   exit
-----
Finished in 0.720 s
        </response>
      </item>
      <item>
        <admin>rollback compare</admin>
        <response>
0.160 s
0.070 s
-----
configure
router
-   mpls
```

```
-      shutdown
-      interface "system"
-        no shutdown
-      exit
-      lsp "test"
-        shutdown
-      exit
-    exit
-    rsvp
-      shutdown
-      interface "system"
-        no shutdown
-      exit
-    exit
-  exit
-  service
-    vpls "99" customer 1 create
-      shutdown
-      stp
-        shutdown
-      exit
-    exit
-  exit
-  exit
-----
Finished in 0.350 s
      </response>
    </item>
  </cli-action>
</data>
</rpc-reply>
]]>]]>
```

4.2.5.7 Example: syntax error in the rollback request

Example

The following example shows a syntax error in the request, which results in a global <rpc-error> reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="103"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <cli-action>
    <admin>rollback compare active-cfg to 1</admin>
    <admin>rollback compare flee-fly</admin>
  </cli-action>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="103" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
    <error-severity>error</error-severity>
    <error-info>
```

```
        <err-element>admin</err-element>
      </error-info>
      <error-message>
        command failed - '/admin rollback compare flee-fly'
      </error-message>
    </rpc-error>
  </rpc-reply>
]>]]>
```

4.2.5.8 Example: error in processing the request

Example

The following example shows an error processing the request.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="103"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <cli-action>
    <admin>rollback compare active-cfg to 1</admin>
    <admin>rollback compare 1 to flee-fly</admin>
  </cli-action>
</rpc>
]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="103" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <cli-action>
      <item>
        <admin>rollback compare active-cfg to 1</admin>
        <response>
0.160 s
0.180 s
-----
configure
router
-   mpls
-       shutdown
-       interface "system"
-           no shutdown
-       exit
-     exit
-     rsvp
-       shutdown
-       interface "system"
-           no shutdown
-       exit
-     exit
-   exit
  exit
-----
Finished in 0.460 s
        </response>
      </item>
      <item>
```

```

        <admin>rollback compare 1 to flee-fly</admin>
      </response>
    </rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
    <error-severity>error</error-severity>
    <error-info>
      <err-element>admin</err-element>
    </error-info>
    <error-message>
      command failed - '/admin rollback compare 1 to flee-fly'
      MINOR: CLI No such file ('flee-fly').
    </error-message>
  </rpc-error>
</item>
</cli-action>
</data>
</rpc-reply>
]]>]]>

```

4.2.5.9 Example: error in second item of the request

Example

The following example shows an error in the second item of the request, resulting in no third item in the reply.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="104" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <cli-action>
    <admin>rollback compare active-cfg to 1</admin>
    <admin>rollback compare 1 to xyz</admin>
    <admin>rollback compare active-cfg to 1</admin>
  </cli-action>
</rpc>
]]>]]>

```

Example

The following example shows the reply.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="104" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <cli-action>
      <item>
        <admin>rollback compare active-cfg to 1</admin>
      </item>
    </cli-action>
  </data>
</rpc-reply>

```

0.170 s
1.350 s

```

-----
configure
router
-   mpls
-       shutdown
-       interface "system"
-       no shutdown
-       exit
-   exit

```

```
-      rsvp
-      shutdown
-      interface "system"
-          no shutdown
-      exit
-      exit
-      exit
-      exit
-----
Finished in 1.640 s
      </response>
    </item>
    <item>
      <admin>rollback compare 1 to xyz</admin>
      <response>
      </response>
      <rpc-error>
        <error-type>application</error-type>
        <error-tag>operation-failed</error-tag>
        <error-severity>error</error-severity>
        <error-info>
          <err-element>admin</err-element>
        </error-info>
        <error-message>
          command failed - '/admin rollback compare 1 to xyz'
          MINOR: CLI No such file ('xyz').
        </error-message>
      </rpc-error>
    </item>
  </cli-action>
</data>
</rpc-reply>
]]>]]>
```

4.2.5.10 System provisioned configuration objects

There is a set of configurable objects that are provisioned (added to the <running> datastore) automatically by SR OS; for example, **log-id 99**.

Some of these SPC objects can be deleted or removed by a user (deletable system provisioned configuration (SPC) objects):

- In CLI, the SPC objects are removed by specifying the keyword **no**, which is then visible in an **info** command or in a saved configuration (**admin save**); for example, **no log-id 99**.
- The deletable SPC objects can be removed or recreated using NETCONF <edit-config> requests, but they are not visible in a <get-config> response if they are:
 - set to their default values, including all child leaves and objects
 - removed or deleted
- The deletable SPC objects are visible in a <get-config> response if a child leaf or object is changed from the default value; for example, changing log-99 to time-format local.
- The list of deletable SPC objects is as follows:

```
Config system security profile default
Config system security profile default entry 10-100
Config system security profile administrative
Config system security profile administrative entry 10-112
Config system security user "admin"
```

```
Config system security user console member "default"
Config system security snmp access group xyz (a set of access groups)
Config system security ssh client-cipher-list protocol-version 1 cipher 200-210
Config system security ssh client-cipher-list protocol-version 2 cipher 190-235
Config system security ssh server-cipher-list protocol-version 1 cipher 200-205
Config system security ssh server-cipher-list protocol-version 2 cipher 190-235
Config log filter 1001
Config log filter 1001 entry 10
Config log log-id 99 & 100
```

Some SPC objects cannot be deleted (non-deletable SPC objects):

- Although they cannot be deleted, some of these non-deletable objects contain modifiable leaves.
- The non-deletable SPC objects are not visible in a <get-config> response when the SPC objects are set to their default values, including all child leaves and objects.
- The non-deletable SPC objects are visible in a <get-config> response if a child leaf or object is changed from the default value; for example, setting the **card-type**.
- The list of non-deletable SPC objects is as follows:

```
Config system security user-template {tacplus_default|radius_default}
Config system security snmp view iso ...
Config system security snmp view li-view ...
Config system security snmp view mgmt-view ...
Config system security snmp view vprn-view ...
Config system security snmp view no-security-view ...Config log event-control ...
Config filter log 101
Config qos ... various default policies can't be deleted
Config qos queue-group-templates ... these can't be deleted
Config card <x>
Config router network-domains network-domain "default"
Config oam-pm bin-group 1
Config call-trace trace-profile "default"
```

Some non-deletable SPC objects are visible in a <get-config> request, even if they are set to default values:

```
Config system security cpu-protection policy 254 and 255
Config router interface "system"
Config service customer 1
```

4.3 Establishing a NETCONF session

Example

The following example shows a client on a Linux PC initiating a connection to an SR OS NETCONF server. In accordance with RFC 6242, the SSH session must be invoked using an SSH subsystem.

```
ssh -s my_username@a.b.c.d -p 830 netconf
```

Example

The following example shows an exchange of hello messages that include advertisement of capabilities.

The following is a message from the SR OS server.

```
<?xml version="1.0" encoding="UTF-8"?>
<hello xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <capabilities>
    <capability>urn:ietf:params:netconf:base:1.0</capability>
    <capability>urn:ietf:params:netconf:base:1.1</capability>
    <capability>urn:ietf:params:netconf:capability:writable-running:1.0</
  capability>
    <capability>urn:ietf:params:netconf:capability:validate:1.0</capability>
    <capability>urn:ietf:params:netconf:capability:validate:1.1</capability>
    <capability>urn:ietf:params:netconf:capability:startup:1.0</capability>
    <capability>urn:ietf:params:netconf:capability:url:1.0?scheme=ftp,tftp,file<
  /capability>
    <capability>urn:ietf:params:netconf:capability:with-defaults:1.0?basic-
mode=trim</capability>
    <capability>urn:ietf:params:xml:ns:netconf:base:1.0?module=ietf-
netconf&revision=2015-02-27&features=writable-
running,validate,startup,url&deviations=alu-netconf-deviations-r13</capability>
    <capability>urn:alcatel-lucent.com:sros:ns:yang:netconf-deviations-
r13?module=alu-netconf-deviations-r13&revision=2015-02-27</capability>
    <capability>urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-
r13?module=alu-cli-content-layer-r13&revision=2015-02-27</capability>
    <capability>urn:alcatel-lucent.com:sros:ns:yang:conf-r13?module=conf-
r13&revision=2015-02-27</capability>
    <capability>urn:alcatel-lucent.com:sros:ns:yang:conf-aaa-r13?module=conf-
aaa-r13&revision=2015-02-27</capability>
    ...
    ...
    ...
    ...
    <capability>urn:alcatel-lucent.com:sros:ns:yang:conf-vsm-r13?module=conf-
vsm-r13&revision=2015-02-27</capability>
  </capabilities>
  <session-id>54</session-id>
</hello>
]]>]]>
```

Example

The following is a reply from a NETCONF client.

```
<?xml version="1.0" encoding="UTF-8"?>
  <hello>
    <capabilities>
      <capability>urn:ietf:params:netconf:base:1.0</capability>
    </capabilities>
  </hello>
]]>]]>
```

4.4 XML content layer

XML is the default content layer format for the SR OS NETCONF server. When the XML format is used at the NETCONF content layer, configuration changes and configuration information retrieved are expressed as XML tags.

The XML formatted configuration information must be correctly ordered and has the same dependencies and behavior as the equivalent CLI commands.

4.4.1 <edit-config> with XML content layer

An <edit-config> operation is supported with the <running> datastore only. The following <edit-config> operation attribute values are supported:

- merge
- remove
- delete
 - A "delete" operation for a leaf or a presence container does not return an error if the item is already deleted.
 - An error is returned if attempting to delete a list node that does not exist.
 - A "delete" operation for a container without presence returns an error
- create
 - A "create" operation for a leaf or a presence container does not return an error if the item is being set to the same value.
 - An error is returned if attempting to create a list node that already exists.
 - A "create" operation for a container without presence results in an "OK" response (no error) but is silently ignored.

The "replace" operation is not supported as an attribute value for the <edit-config> operation.

Both "delete" and "remove" operations have the following behavior:

Delete or remove operations are not supported for boolean leaves. For example, any of the following samples return an error:

- <shutdown operation="delete"/>
- <shutdown operation="delete">>false</shutdown>
- <interface operation="delete">
- <interface-name>abc</interface-name>
- <shutdown>true</shutdown>
- </interface>

For this last case <shutdown operation="merge">true</shutdown> can be used instead to make the request valid:

- A <delete> or <remove> operation is the equivalent of the **no** command in CLI. This **no** command is applied whether the default for the command is enabled, disabled (**no**), or a specific value. The delete operation is not aware of the default value of the object/leaf being deleted.
- A <delete> or <remove> operation for a leaf, where the request also specifies a value for the leaf, results in an error.

The <edit-config> <default-operation> parameter is supported merge and none values. The "replace" value is not supported. An operation of "none" on a leaf node (inherited or direct) causes that leaf statement to be ignored. No error is returned if the leaf does not exist in the data model.

For merge and create operations, the operations and tags specified in an <edit-config> request are order-aware and order-dependent, and the sequence of operations must follow the required sequence of the equivalent CLI commands. The <edit-config> is processed and executed in a top-down order. The same

leaf can be enabled, disabled, or enabled and then disabled, and the final result is whatever was last specified for that leaf in the <edit-config> request.

For <delete> and <remove> operations, the SR OS NETCONF server recursively unwinds any children of the node being deleted or removed first before removing the node itself. The deepest child branch of the request is examined first and any leaves are processed, after which the server works backwards out of the deepest branches back up to the object where the delete operation was specified. If children branches of an object must be removed before deleting the object in CLI, the equivalent delete request in a NETCONF <edit-config> must contain all those children if they exist, such as if the children are configured in the config datastore).

Example

In the following example, SR OS shuts down the test interface, deletes the interface, shuts down the VPLS, and removes it.

```
<config>
  <configure>
    <service>
      <vpls operation="delete">
        <service-id>11</service-id>
        <interface>
          <ip-int-name>test</ip-int-name>
          <shutdown operation="merge">true</shutdown>
        </interface>
        <shutdown operation="merge">true</shutdown>
      </vpls>
    </service>
  </configure>
</config>
```



Note: The 'operation="merge"' is required in the shutdown nodes; otherwise, the inherited operation is <delete>, which is not supported on boolean leaves.

In the preceding example, if other children of vpls 11 exist in the config besides the interface test specified in the delete request, and it is required to delete those children in CLI before vpls 11 is removed, the deletion request fails. All configured children must be specified in the delete request.

4.4.2 <get-config> with XML content layer

A <get-config> operation is supported with the <running> datastore only.

Subtree filtering for basic subtree selection is supported for XML content layer <get-config> requests. Post-filtering of the selected subtrees is not supported.

The subtree filtering behavior is as follows:

- Attribute match expressions, as defined in section 6.2.2 of RFC 6241, are not supported.
- Only containers are supported as selection nodes, as defined in section 6.2.4 of RFC 6241. Empty leaf nodes or list name nodes are not supported as selection nodes.
 - Nodes that represent lists must also include content match nodes for all keys of the list; for example, <configure><router><interface><interface-name>abc</interface-name>.
 - A selection node that is a list, without also specifying the key, is not supported; for example, <configure><router><interface/> is not supported. An alternative is to request the parent

containment node that contains the wanted list node; for example, <configure><router> instead of <configure><router><interface>.

- Content match nodes, as defined in section 6.2.5 of RFC 6241, are only supported for key leaves; for example, <configure><router><interface> <interface-name>abc</interface-name>.

Content match nodes that are leaves but are not also keys result in an error (not silently ignored).

A <get-config> request that specify a non-existent list node or presence container results in a reply that contains no data for those list nodes or containers. An <rpc-error> is not sent in this case.

See the following sections for examples of <get-config> request and response messages:

- [Example: request that returns an error](#)
- [Example: content match node on a list key](#)
- [Example: selection node that is a container](#)
- [Example: list name node as an invalid selection node](#)
- [Example: empty leaf node as invalid selection node](#)
- [Example: key repeated in the same instance of the list node](#)
- [Example: retrieving the full configuration](#)

4.4.2.1 Example: request that returns an error

Example

The following example shows a request that returns an error.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <configure>
        <router>
          <interface>
            <interface-name>abc</interface-name>
            <delayed-enable>30</delayed-enable>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
  </rpc-error>
</rpc-reply>
```

```
<error-severity>error</error-severity>
<error-info>
  <err-element>get-config</err-element>
</error-info>
<error-message>
  command failed - 'configure router interface "abc" delayed-enable'
</error-message>
</rpc-error>
</rpc-reply>
]]>]]>
```

4.4.2.2 Example: content match node on a list key

Multiple key leaves for the same key cannot be requested inside the same instance of the list name node; for example, `<interface-name>abc</interface-name>` `<interface-name>def</interface-name>`. Each key value must be inside its own instance of the list name node; for example, `<interface>` `<interface-name>abc</interface-name>` `</interface>` `<interface>` `<interface-name>def</interface-name>` `</interface>`.

Example

The following example shows a valid `<get-config>` request for a content match node on a list key.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <configure>
        <router>
          <interface>
            <interface-name>abc</interface-name>
          </interface>
        </router>
      </configure>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

4.4.2.3 Example: selection node that is a container

Example

The following example shows a valid `<get-config>` request selection node that is a container.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
```

```
        <configure>
          <router/>
        </configure>
      </filter>
    </get-config>
  </rpc>
]>]]>
```

Example

The reply contains the configuration for all child nodes of **config>router**.

4.4.2.4 Example: list name node as an invalid selection node

Example

The following example shows an invalid <get-config> request for a list name node that is an invalid selection node.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <configure>
        <router>
          <interface>
            </interface>
          </router>
        </configure>
      </filter>
    </get-config>
  </rpc>
]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
    <error-severity>error</error-severity>
    <error-info>
      <err-element>get-config</err-element>
    </error-info>
    <error-message>
      command failed - 'configure router interface'
    </error-message>
  </rpc-error>
</rpc-reply>
]>]]>
```

4.4.2.5 Example: empty leaf node as invalid selection node

Example

The following example shows an invalid <get-config> request for an empty leaf node that is an invalid selection node.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <configure>
        <system>
          <security>
            <ftp-server>
              </ftp-server>
            </security>
          </system>
        </configure>
      </filter>
    </get-config>
  </rpc>
]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>protocol</error-type>
    <error-tag>bad-element</error-tag>
    <error-severity>error</error-severity>
    <error-info>
      <bad-element>ftp-server</bad-element>
    </error-info>
    <error-message>
      Element is not valid in the specified context.
    </error-message>
  </rpc-error>
</rpc-reply>
]>]]>
```

4.4.2.6 Example: key repeated in the same instance of the list node

Example

The following example shows an invalid <get-config> request for a key that is repeated in the same instance of the list node.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
```

```
<get-config>
  <source>
    <running/>
  </source>
  <filter>
    <configure>
      <router>
        <interface>
          <interface-name>abc</interface-name>
          <interface-name>def</interface-name>
        </interface>
      </router>
    </configure>
  </filter>
</get-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
    <error-severity>error</error-severity>
    <error-info>
      <err-element>get-config</err-element>
    </error-info>
    <error-message>
      command failed - 'configure router interface "abc" "def"'
    </error-message>
  </rpc-error>
</rpc-reply>
]]>]]>
```

4.4.2.7 Example: retrieving the full configuration

The full configuration (equivalent to the CLI command **admin display-config**) can be retrieved using a **<get-config>** request:

- when the **<filter>** tag is not present

For example:

```
<get-config>
  <source>
    <running/>
  </source>
</get-config>
```

- when only the **<configure>** tag is present inside a **<filter>** tag

For example:

```
<get-config>
  <source>
    <running/>
```



```
</source>
</filter>
  <configure/>
</filter>
</get-config>
```

4.5 XML content layer examples

The following examples can be used after a NETCONF session has been established including the exchange of the <hello> messages.

4.5.1 Example: checking NETCONF status

Example

The following example shows a <get-config> request and response to check whether NETCONF is shut down on the router.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source> <running/> </source>
    <filter>
      <configure>
        <system>
          <netconf>
            </netconf>
          </system>
        </configure>
      </filter>
    </get-config>
  </rpc>
]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data>
    <configure xmlns="urn:alcatel-lucent.com:sros:ns:yang:conf-r13">
      <system>
        <netconf>
          <shutdown>false</shutdown>
        </netconf>
      </system>
    </configure>
  </data>
</rpc-reply>
]>]]>
```

4.5.2 Example: creating a basic VPRN service

Example

The following example shows a <edit-config> request and response to create a basic VPRN service.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <configure>
        <service>
          <vprn operation="create">
            <service-id>200</service-id>
            <customer>1</customer>
          </vprn>
        </service>
      </configure>
    </config>
  </edit-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <ok/>
</rpc-reply>
]]>]]>
```

4.5.3 Example: creating a VPRN service with a SAP

Example

The following example shows a <edit-config> request and response to create a basic VPRN service with a SAP; the system creates the service/interface, but fails to create the SAP because the specified port encapsulation is invalid.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101"
  xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <edit-config>
    <target>
      <running/>
    </target>
    <config>
      <configure>
        <service>
          <vprn operation="create">
            <interface>
```

```

        <ip-int-name>"test"</ip-int-name>
        <sap>
          <sap-id>"2/1/1"</sap-id>
        </sap>
      </interface>
      <service-id>201</service-id>
      <customer>1</customer>
    </vprn>
  </service>
</configure>
</config>
</edit-config>
</rpc>
]]>]]>

```

Example

The following example shows the reply.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <rpc-error>
    <error-type>application</error-type>
    <error-tag>operation-failed</error-tag>
    <error-severity>error</error-severity>
    <error-info>
      <err-element>edit-config</err-element>
    </error-info>
    <error-message>
      command failed -
      'configure service vprn "201" customer 1 interface "test" sap "2/1/1"'
      MINOR: CLI SAP-id has an invalid port number or encapsulation value.
    </error-message>
  </rpc-error>
</rpc-reply>
]]>]]>

```

4.6 CLI content layer

When the CLI format is used at the NETCONF content layer, configuration changes and information retrieved are expressed as untagged (non-XML) CLI commands; for example, CLI script.

The script must be correctly ordered and has the same dependencies and behavior as CLI. The location of CR/LF (ENTER) within the CLI for an <edit-config> request is significant and affects the processing of the CLI commands, such as which CLI branch is considered the "working context". In the following two examples the "working context" after the commands issued are different.

Example: 1

```

exit all [<-ENTER]
configure system time zone EST [<-ENTER]

```

Example: 2

```

exit all [<-ENTER]
configure [<-ENTER]
  system [<-ENTER]
    time [<-ENTER]

```

```
zone EST [<-ENTER]
```

After example 1, the CLI working context is the root, and immediately sending "dst-zone CEST" would return an error. After example 2, the CLI working context is **config>system>time** and sending "dst-zone CEST" would work as expected.

Configuration changes made using NETCONF trigger the same "change" log events (for example, `tmnxConfigCreate`) as a normal CLI user doing the same changes.

The `<with-defaults>` tag, as defined in RFC 6243, is not supported in a CLI content layer request.

The operator can get a full configuration, including defaults for a CLI content layer, using an empty `<cli-info-detail>`. The full configuration (equivalent to the CLI command **admin display-config [detail]**) can be obtained using a `<get-config>` request in a CLI content layer format with an empty `<cli-info>` or `<cli-info-detail>` tag inside a `<config-format-cli-block>`. The `<report-all>` tag is not supported.

The following post-processing commands are ignored: "| match" (pipe match), "| count" (pipe count) and ">" (redirect to file). CLI ranges are not supported for any command; for example, **show card [1..5]**.

See [CLI content layer examples](#) for more information.

4.7 CLI content layer examples

The following examples can be used after a NETCONF session has been established including the exchange of the `<hello>` messages.

4.7.1 Example: configuration change



Note:

The `exit all` command is not required at the beginning of the CLI block; it is automatically assumed by the SR OS NETCONF server.

Example

The following example shows a configuration change request and response.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="104" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <edit-config>
    <target><running/></target>
    <config>
      <config-format-cli-block>
        configure system
          time zone EST
          location over-here
        exit all
      </config-format-cli-block>
    </config>
  </edit-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="104"
xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
<ok/>
</rpc-reply>
]]>]]>
```

4.7.2 Example: retrieving configuration information

Example

The following example shows a <get-config> request and response to retrieve configuration information.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <config-format-cli-block>
        <cli-info>router</cli-info>
        <cli-info-detail>system login-control</cli-info-detail>
      </config-format-cli-block>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <config-format-cli-block>
      <item>
        <cli-info>router</cli-info>
        <response>
          -----
          #-----
          echo "IP Configuration"
          #-----
          interface "system"
            no shutdown
          exit
          -----
        </response>
      </item>
      <item>
        <cli-info-detail>system login-control</cli-info-detail>
        <response>
          -----

```

```
ftp
  inbound-max-sessions 3
exit
ssh
  no disable-graceful-shutdown
  inbound-max-sessions 5
  outbound-max-sessions 5
exit
telnet
  no enable-graceful-shutdown
  inbound-max-sessions 5
  outbound-max-sessions 5
exit
idle-timeout 30
no pre-login-message
no motd
login-banner
no exponential-backoff
-----
      </response>
    </item>
  </config-format-cli-block>
</data>
</rpc-reply>
]]>]]>
```

4.7.3 Example: retrieving full configuration information



Note:

The `<cli-info-detail/>` request can be used to get the full configuration, including default settings.

Example

The following example shows a `<get-config>` request and response to retrieve full configuration information.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get-config>
    <source>
      <running/>
    </source>
    <filter>
      <config-format-cli-block>
        <cli-info/>
      </config-format-cli-block>
    </filter>
  </get-config>
</rpc>
]]>]]>
```

Example

The following example shows the reply.

```
<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <config-format-cli-block>
```

```
<item>
  <cli-info></cli-info>
  <response>
# TiMOS-C-0.0.I4301 cpm/x86_64 ALCATEL SR 7750 Copyright (c) 2000-2015 Alcatel-
Lucent.
# All rights reserved. All use subject to applicable license agreements.
# Built on Sun Jan 4 19:11:11 PST 2015 by builder in /rel0.0/I4301/panos/main

# Generated WED JAN 07 01:07:43 2015 UTC

exit all
configure
#-----
echo "System Configuration"
#-----
  system
    chassis-mode d
    dns
    exit
    load-balancing
      lsr-load-balancing lbl-ip
      system-ip-load-balancing
    exit
    netconf
      no shutdown
    exit
    snmp
      shutdown
      engineID "deadbeefdeadbeef"
    exit
    time
      ntp
        authentication-key 1 key "0AwgNUlbzgI" hash2 type des
        no shutdown
      exit
      sntp
        shutdown
      exit
      zone EST
    exit
    thresholds
      rmon
    exit
  exit
#-----
echo "Cron Configuration"
#-----
    cron
    ...
    ...
    ...
    exit
  exit
#-----
echo "System Security Configuration"
#-----
  ...
  ...
  ...
#-----
echo "System Time NTP Configuration"
#-----
    system
      time
```

```

        ntp
        exit
    exit
exit
exit all

# Finished WED JAN 07 01:07:43 2015 UTC
-----
-----
        </response>
    </item>
</config-format-cli-block>
</data>
</rpc-reply>
]]>]]>

```

4.7.4 Example: <get> request

Example

The following example shows a <get> request.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <get>
    <filter>
      <oper-data-format-cli-block>
        <cli-show>system security ssh</cli-show>
      </oper-data-format-cli-block>
    </filter>
  </get>
</rpc>
]]>]]>

```

Example

The following example shows the reply.

```

<?xml version="1.0" encoding="UTF-8"?>
<rpc-reply message-id="101" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
  <data xmlns="urn:alcatel-lucent.com:sros:ns:yang:cli-content-layer-r13">
    <oper-data-format-cli-block>
      <item>
        <cli-show>system security ssh</cli-show>
        <response>
          =====
          SSH Server
          =====
          Administrative State      : Enabled
          Operational State        : Up
          Preserve Key              : Enabled

          SSH Protocol Version 1   : Disabled

          SSH Protocol Version 2   : Enabled
          DSA Host Key Fingerprint : ca:ce:37:90:49:7d:cc:68:22:b3:06:2c:11:cd:3c:8e
          RSA Host Key Fingerprint : 49:7c:21:97:42:35:83:61:06:95:cd:a8:78:4c:1e:76
        
```



```
-----
Connection                               Username
  Version Cipher                      ServerName  Status
-----
135.121.143.254                          admin
   2      aes128-cbc                     netconf    connected
-----
Number of SSH sessions : 1
=====
                                </response>
                                </item>
                                </oper-data-format-cli-block>
                                </data>
</rpc-reply>
]]>]]>
```

4.8 NETCONF command reference

4.8.1 Command hierarchies

- [Configuration commands](#)
 - [NETCONF system commands](#)
 - [NETCONF security commands](#)
- [Show commands](#)

4.8.1.1 Configuration commands

4.8.1.1.1 NETCONF system commands

```
config
- system
  - netconf
    - listen
      - port port
      - no port
      - [no] shutdown
```

4.8.1.1.2 NETCONF security commands

```
config
- system
  - security
    - profile profile-id
      - netconf
        - base-op-authorization
          - [no] close-session
          - [no] copy-config
          - [no] delete-config
```

```
- [no] edit-config
- [no] get
- [no] get-config
- [no] kill-session
```

4.8.1.2 Show commands

```
show
- system
  - netconf
    - counters
```

4.8.1.3 Configuration commands

- [NETCONF system commands](#)
- [NETCONF security commands](#)



Note:

NETCONF is only supported on 7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T.

4.8.1.3.1 NETCONF system commands

listen

Syntax

listen

Context

config>system>netconf

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

Commands in this context configure NETCONF listen parameters.

port

Syntax

port *port*

no port

Context

config>system>netconf>listen

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command configures the port on which the server listens for connections.

The **no** form of this command disables the port on which the server listens for connections.

Default

no port

Parameters

port

Specifies the port number.

Values 22, 830

shutdown

Syntax

[no] shutdown

Context

config>system>netconf>listen

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command disables the NETCONF server. The **shutdown** command is blocked if there are any active NETCONF sessions. The user should use the **admin disconnect** command to disconnect all NETCONF sessions before shutting down the NETCONF service.

The **no** form of this command enables the NETCONF server.

4.8.1.3.2 NETCONF security commands

netconf

Syntax

netconf

Context

config>system>security>profile

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command authorizes NETCONF capability for the user.

base-op-authorization

Syntax

base-op-authorization

Context

config>system>security>profile>netconf

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the context where permission to use various NETCONF operations is controlled.

close-session

Syntax

[no] close-session

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <close-session> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no close-session

copy-config

Syntax

[no] copy-config

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <copy-config> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no copy-config

delete-config

Syntax

[no] delete-config

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <delete-config> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no delete-config

edit-config

Syntax

[no] edit-config

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <edit-config> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no edit-config

get

Syntax

[no] get

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <get> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no get

get-config

Syntax

[no] get-config

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command enables the NETCONF <get-config> RPC.

The **no** form of this command disables the RPC.



Note: The operation is enabled by default in the built-in system-generated administrative profile.

Default

no get-config

kill-session

Syntax

[no] kill-session

Context

config>system>security>profile>netconf>base-op-authorization

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command authorizes a user associated with the profile to send a kill session NETCONF operation. This kill session operation allows a NETCONF client to kill another NETCONF session, but not the session in which the operation is requested.

The **no** form of this command disables access to the kill session NETCONF RPC.

Default

no kill-session

4.8.1.4 Show commands

netconf

Syntax

netconf

Context

show>system

Platforms

7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description

This command displays NETCONF SSH sessions.

Output

The following output is an example of NETCONF SSH session information, and [Table 46: Output fields: system NETCONF](#) describes the output fields.

Sample output

```
7210SAS>show>system# netconf

=====
NETCONF Server
=====
Administrative State      : Disabled
Operational State        : Down
=====
7210SAS>show>system#
```

Table 46: Output fields: system NETCONF

Label	Description
Administrative State	Enabled — Displays that NETCONF is enabled

Label	Description
	Disabled — Displays that NETCONF is disabled
Operational State	Up — Displays that NETCONF is operational Down — Displays that NETCONF is not operational
Connection	The IP address of the connected router or routers (remote client)

counters

Syntax
counters

Context
show>system>netconf

Platforms
7210 SAS-K 2F1C2T and 7210 SAS-K 2F6C4T

Description
This command displays NETCONF counters.

Output
The following output is an example of NETCONF counter information, and [Table 47: Output fields: NETCONF counters](#) describes the output fields.

Sample output

```
7210SAS>show>system# netconf counters
=====
NETCONF counters:
=====
    Rx Messages
-----
    in gets           : 0
    in get-configs    : 0
    in edit-configs   : 0
    in copy-configs   : 0
    in delete-configs : 0
    in validates      : 0
    in close-sessions : 0
    in kill-sessions  : 0
-----
    Rx Total          : 0
=====
    Tx Messages
-----
    out rpc-errors    : 0
-----
    Tx Total          : 0
```




Table 47: Output fields: NETCONF counters

Label	Description
RX Messages	Types and numbers of received messages
RX Total	Total of all received messages
TX Messages	Types and numbers of sent messages
TX Total	Total of all sent messages
failed edit-configs	Number of failed <edit-config> requests as a result of a lock (including implicit ones) being taken by other NETCONF sessions
failed locks	Number of failed <lock> requests as a result of a lock (including implicit ones) being taken by other NETCONF sessions

5 Event and accounting logs

This chapter provides information about configuring event and accounting logs on the 7210 SAS.

5.1 Logging overview

The two primary types of logging supported on the 7210 SAS are event logging and accounting logs.

Event logging controls the generation, dissemination and recording of system events for monitoring status and troubleshooting faults within the system. The 7210 SAS groups events into four major categories or event sources:

- **security events**

These are events that pertain to attempts to breach system security.

- **change events**

These are events that pertain to the configuration and operation of the node.

- **main events**

These are events that pertain to applications that are not assigned to other event categories/sources.

- **debug events**

These are events that pertain to trace or other debugging information.

The following are events within the 7210 SAS and have the following characteristics:

- a time stamp in UTC or local time
- the generating application
- a unique event ID within the application
- the VRF-ID
- a subject identifying the affected object
- a short text description

Event control assigns the severity for each application event and whether the event should be generated or suppressed. The severity numbers and severity names supported on the 7210 SAS conform to ITU standards M.3100 X.733 and X.21 and are listed in the following table.

Table 48: Event severity levels

Severity number	Severity name
1	cleared
2	indeterminate (info)
3	critical

Severity number	Severity name
4	major
5	minor
6	warning

Events that are suppressed by event control do not generate event log entries. Event control maintains a count of the number of events generated (logged) and dropped (suppressed) for each application event. The severity of an application event can be configured in event control.

An event log in the 7210 SAS associates the event sources with logging destinations. Examples of logging destinations include, the console session, a specific Telnet or SSH session, memory logs, file destinations, SNMP trap groups and syslog destinations. A log filter policy can be associated with the event log to control which events are logged in the event log based on combinations of application, severity, event ID range, VRF ID, and the subject of the event.

The 7210 SAS accounting logs collect comprehensive accounting statistics to support a variety of billing models. The routers collect accounting data on services and network ports on a per-service class basis. In addition to gathering information critical for service billing, accounting records can be analyzed to provide insight about customer service trends for potential service revenue opportunities. Accounting statistics on network ports can be used to track link utilization and network traffic pattern trends. This information is valuable for traffic engineering and capacity planning within the network core.

Accounting statistics are collected according to the parameters defined within the context of an accounting policy. Accounting policies are applied to access objects (such as access ports and SAPs) or network objects (such as SDPs, network ports, network IP interface). Accounting statistics are collected by counters for individual services defined on the customer's SAP or by the counters within forwarding class (FC) queues defined on the network ports.

The type of record defined within the accounting policy determines where a policy is applied, what statistics are collected and time interval at which to collect statistics.

The "location" field of the file-id allows the user configure the device and store it in any directory. The default value is `cf1:`, but it can also be `uf1:` (for devices supporting USB).

5.2 Log destinations

Both event logs and accounting logs use a common mechanism for referencing a log destination.

Only a single log destination can be associated with an event log or with an accounting log. An event log can be associated with multiple event sources, but it can only have a single log destination.

A file destination is the only type of log destination that can be configured for an accounting log.

5.2.1 Console

Sending events to a console destination means the message is sent to the system console. The console device can be used as an event log destination.

5.2.2 Session

A session destination is a temporary log destination that directs entries to the active Telnet or SSH session for the duration of the session. When the session is terminated, for example, when the user logs out, the event log is removed. Event logs configured with a session destination are not stored in the configuration file. Event logs can direct log entries to the session destination.

5.2.3 Memory logs

A memory log is a circular buffer. When the log is full, the oldest entry in the log is replaced with the new entry. When a memory log is created, the specific number of entries it can hold can be specified, otherwise it assumes a default size. An event log can send entries to a memory log destination.

5.2.4 Log files

Log files can be used by both event logs and accounting logs and are stored on the compact flash devices (specifically cf1:) in the file system.

A log file is identified with a single log file ID, but a log file is generally composed of a number individual files in the file system. A log file is configured with a rollover parameter, expressed in minutes, which represents the length of time an individual log file should be written to before a new file is created for the relevant log file ID. The rollover time is checked only when an update to the log is performed. Therefore, complying to this rule is subject to the incoming rate of the data being logged. For example, if the rate is very low, the actual rollover time may be longer than the configured value.

The retention time for a log file specifies the amount of time the file should be retained on the system based on the creation date and time of the file.

When a log file is created, only the compact flash device for the log file is specified. Log files are created in specific subdirectories with standardized names depending on the type of information stored in the log file.

Event log files are always created in the \log directory on the specified compact flash device. The naming convention for event log files is:

`\log ee $ff$ -timestamp`

where:

- *ee* is the event log ID
- *ff* is the log file destination ID
- *timestamp* is the timestamp when the file is created in the form of *yyyymmdd-hhmmss* where:
 - *yyyy* is the four-digit year (for example, 2007)
 - *mm* is the two digit number representing the month (for example, 12 for December)
 - *dd* is the two digit number representing the day of the month (for example, 03 for the 3rd of the month)
 - *hh* is the two digit hour in a 24-hour clock (for example, 04 for 4 a.m.)
 - *mm* is the two digit minute (for example, 30 for 30 minutes past the hour)
 - *ss* is the two digit second (for example, 14 for 14 seconds)

Accounting log files are created in the `\act-collect` directory on a compact flash device (cf1). The naming convention for accounting log files is nearly the same as for log files except the prefix **act** is used instead of the prefix **log**. The naming convention for accounting logs is:

`act aaff-timestamp.xml.gz`

where:

- *aa* is the accounting policy ID
- *ff* is the log file destination ID
- *timestamp* is the timestamp when the file is created in the form of *yyyymmdd-hhmmss* where:
 - *yyyy* is the four-digit year (for example, 2022)
 - *mm* is the two digit number representing the month (for example, 12 for December)
 - *dd* is the two digit number representing the day of the month (for example, 03 for the 3rd of the month)
 - *hh* is the two digit hour in a 24-hour clock (for example, 04 for 4 a.m.)
 - *mm* is the two digit minute (for example, 30 for 30 minutes past the hour)
 - *ss* is the two digit second (for example, 14 for 14 seconds)

Accounting logs are `.xml` files created in a compressed format and have a `.gz` extension.

The `\act-collect` directory is where active accounting logs are written. When an accounting log is rolled over, the active file is closed and archived in the `\act` directory before a new active accounting log file created in `\act-collect`.

5.2.5 SNMP trap group

An event log can be configured to send events to SNMP trap receivers by specifying an SNMP trap group destination.

An SNMP trap group can have multiple trap targets. Each trap target can have different operational parameters.

A trap destination has the following properties:

- the IP address of the trap receiver
- the UDP port used to send the SNMP trap
- SNMP version (v1, v2c, or v3) used to format the SNMP notification
- SNMP community name for SNMPv1 and SNMPv2c receivers
- security name and level for SNMPv3 trap receivers

For SNMP traps that are sent in-band, the source IP address of the trap is the system IP address of the 7210 SAS.

Each trap target destination of a trap group receives the identical sequence of events as defined by the log ID and the associated sources and log filter applied.

5.2.6 Syslog

5.2.6.1 Syslog implementation overview

An event log can be configured to send events to one syslog destination. Syslog destinations have the following properties:

- Syslog server IP address or Fully Qualified Domain Name (FQDN)
- UDP port or TLS profile used to send the syslog message
- Syslog Facility Code (0 to 23) (default 23 - local 7)
- Syslog Severity Threshold (0 to 7); sends events exceeding the configured level

Because syslog uses eight severity levels, whereas the 7210 SAS uses six internal severity levels, the 7210 SAS severity levels are mapped to syslog severities. The following table describes the severity-level mappings.

Table 49: Router to syslog severity-level mappings

7210 SAS event severity	Syslog severity numerical code	Syslog severity name	Syslog severity definition
—	0	emergency	System is unusable
critical	1	alert	Action must be taken immediately
major	2	critical	Critical conditions
minor	3	error	Error conditions
warning	4	warning	Warning conditions
—	5	notice	Normal but significant condition
cleared or indeterminate	6	info	Informational messages
—	7	debug	Debug-level messages

The general format of an 7210 SAS syslog message is the following, as defined in RFC 3164, *The BSD Syslog Protocol*:

<PRI><HEADER> <MSG>



Note: The "<" and ">" are informational delimiters to make reading and understanding the format easier. They do not appear in the actual syslog message except as part of the PRI.

where:

- <PRI> is a number that is calculated from the message Facility and Severity codes as follows:

Facility * 8 + Severity

The calculated PRI value is enclosed in "<" and ">" angle brackets in the transmitted syslog message.

- <HEADER> is composed of the following:

<TIMESTAMP> <HOSTNAME>

- <TIMESTAMP> immediately follows the trailing ">" from the PRI part, without a space between. Depending on the configuration of the **configure log syslog timestamp-format** command, the format is either:

MMM DD HH:MM:SS

or

MMM DD HH:MM:SS.sss

There are always two characters for the day (DD). Single-digit days are preceded with a space character. Either UTC or local time is used, depending on the configuration of the **time-format** command for the event log.

- <HOSTNAME> follows the <TIMESTAMP> with a space between. It is an IP address by default, or for event logs (but not filter syslogs), can be configured to use other values using the following commands:

```
configure log syslog hostname
```

- <MSG> is composed of the following:

<log-prefix>: <seq> <vrtr-name> <application>-<severity>-<Event Name>-<Event ID> [<subject>]:
<message>\n

- <log-prefix> is an optional 32 characters of text (default = 'TMNX') as configured using the **log-prefix** command.
- <seq> is the log event sequence number (always preceded by a colon and a space char)
- <vrtr-name> is vprn1, vprn2, ... | Base | management | vpls-management
- <subject> may be empty, resulting in []:
- \n is the standard ASCII newline character (0x0A)

Examples (from different nodes)

default log-prefix (TMNX):

```
<188>Jan  2 18:43:23 10.221.38.108 TMNX: 17 Base SYSTEM-WARNING-tmnxStateChange-  
2009 [CHASSIS]: Status of Card 1 changed administrative state: inService,  
operational state: outOfService\n  
<186>Jan  2 18:43:23 10.221.38.108 TMNX: 18 Base CHASSIS-MAJOR-tmnxEqCardRemoved-  
2003 [Card 1]: Class IO Module : removed\n
```

no log-prefix:

```
<188>Jan 11 18:48:12 10.221.38.108 : 32 Base SYSTEM-WARNING-tmnxStateChange-2009  
[CHASSIS]: Status of Card 1 changed administrative state: inService,  
operational state: outOfService\n  
<186>Jan 11 18:48:12 10.221.38.108 : 33 Base CHASSIS-MAJOR-tmnxEqCardRemoved-  
2003 [Card 1]: Class IO Module : removed\n
```

log-prefix "test":

```
<186>Jan 11 18:51:22 10.221.38.108 test: 47 Base CHASSIS-MAJOR-tmnxEqCardRemoved-  
2003 [Card 1]: Class IO Module : removed\n  
<188>Jan 11 18:51:22 10.221.38.108 test: 48 Base SYSTEM-WARNING-tmnxStateChange-
```



```
2009 [CHASSIS]: Status of Card 1 changed administrative state: inService,  
operational state: outOfService\n
```

Syslog IP header source address

The source IP address field of the IP header on syslog message packets depends on a number of factors, including which interface the message is transmitted on and a few configuration commands.

When a syslog packet is transmitted out-of-band (out a CPM Ethernet port in the management router instance), the source IP address contains the address of the management interface as configured in the BOF.

When a syslog packet is transmitted in-band (for example, out a port on an IMM) in the Base router instance, the order of precedence for how the source IP address is populated is the following:

Classic CLI

1. source address

```
configure system security source-address application syslog  
configure system security source-address application6 syslog
```

2. system address

```
configure router interface "system" address  
configure router interface "system" ipv6 address
```

Syslog HOSTNAME

The HOSTNAME field of syslog messages can be populated with an IP address, the system name, or a number of other options.

For event logs, use the following commands if a system name or other string is wanted. This command is ignored for filter syslogs.

```
configure log syslog hostname
```

For filter syslogs, and for event logs if the **hostname** command is not configured, SR OS populates the syslog HOSTNAME field with an IP address as follows.

When a syslog packet is transmitted out-of-band (out a CPM Ethernet port in the management router instance), the HOSTNAME field contains the address of the management interface as configured in the BOF.

When a syslog packet is transmitted in-band (for example, out a port on an IMM) in the Base router instance, the order of precedence for how the source IP address is populated is the following:

Classic CLI

1. source address

```
configure system security source-address application syslog  
configure system security source-address application6 syslog
```

2. system address

```
configure router interface "system" address  
configure router interface "system" ipv6 address
```

5.2.6.2 Syslog over TLS for log events

Syslog messages containing log events can be optionally sent over TCP and TLS instead of UDP. TLS support for log event syslog messages is based on RFC 5425, which provides security for syslog through the use of encryption and authentication. Use the following command to enable TLS for syslog log events by configuring a TLS profile against the syslog profile.

```
configure log syslog tls-client-profile
```

Syslog over TLS packets are sent with a fixed TCP source port of 6514.

TLS is supported for the following log event syslogs:

- system syslogs (**configure log syslog**), which can send syslog messages as follows:
 - in-band (for example, out a port on an IMM)
 - out-of-band (out a CPM Ethernet port in the management router instance)

The **configure log route-preference** command configuration determines where the TLS connection is established for the base system syslogs.


If the TLS connection to the syslog collector is not established correctly or is broken during operation, the connection is retried each time there is a new log event to send.

5.3 Event logs

Event logs are the means of recording system generated events for later analysis. Events are messages generated by the system by applications or processes within the 7210 SAS.

The following figure shows a function block diagram of event logging.

Figure 8: Event logging block diagram

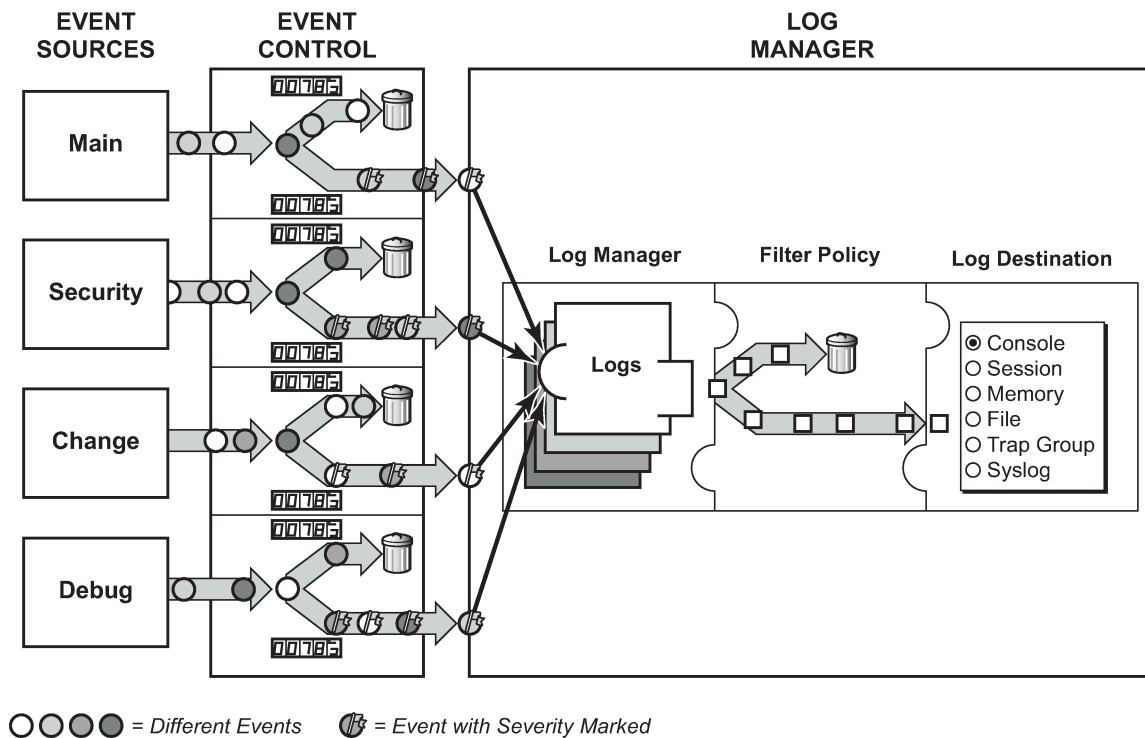

CLI0001B

5.3.1 Event sources

In [Figure 8: Event logging block diagram](#), the event sources are the main categories of events that feed the log manager:

- **security**

The security event source is all events that affect attempts to breach system security such as failed login attempts, attempts to access MIB tables to which the user is not granted access or attempts to enter a branch of the CLI to which access has not been granted. Security events are generated by the SECURITY application and the authenticationFailure event in the SNMP application.

- **change**

The change activity event source is all events that directly affect the configuration or operation of the node. Change events are generated by the USER application. The Change event stream also includes the tmnxConfigModify(#2006), tmnxConfigCreate (#2007), tmnxConfigDelete (#2008) and tmnxStateChange (#2009) change events from the SYSTEM application.

- **debug**

The debug event source is the debugging configuration that has been enabled on the system. Debug events are generated by the DEBUG application.

- **main**

The main event source receives events from all other applications within the 7210 SAS.

Examples of applications within 7210 SAS include IP, MPLS, OSPF, CLI, and services.

Output example

The following shows an example of the **show log applications** command output that displays all applications.

```
*A:ALU-7210# show log applications
=====
Log Event Application Names
=====
Application Name
-----
CHASSIS
DEBUG
DOT1AG
DOT1X
EFM_OAM
FILTER
IGMP
IP
LAG
LOGGER
MIRROR
NTP
OAM
PORT
QOS
SECURITY
SNMP
STP
SVCNMR
SYSTEM
TIP
TOD
USER
VRTR
=====
```

5.3.2 Event control

Event control preprocesses the events generated by applications before the event is passed into the main event stream. Event control assigns a severity to application events and can either forward the event to the main event source or suppress the event. Suppressed events are counted in event control, but these events do not generate log entries because they never reach the log manager.

Simple event throttling is another method of event control and is configured similarly to the generation and suppression options. See [Simple logger event throttling](#).

Events are assigned a default severity level in the system, but the application event severities can be changed by the user.

Application events contain an event number and description that describe why the event is generated. The event number is unique within an application, but the number can be duplicated in other applications.

Output example

The following example, generated by querying event control for application generated events, displays a partial list of event numbers and names.

```
router# show log event-control
=====
Log Events
=====
Application
ID#      Event Name                                P   g/s    Logged    Dropped
-----
CHASSIS:
  2001 cardFailure                               MA  gen      0         0
  2002 cardInserted                             MI  gen      2         0
  2003 cardRemoved                              MI  gen      0         0
  2004 cardWrong                                MI  gen      0         0
  2005 EnvTemperatureTooHigh                     MA  gen      0         0
  2006 fanFailure                               CR  gen      0         0
...
EFM_OAM:
  2001 tmnxDot30amPeerChanged                    MI  gen      0         0
  2002 tmnxDot30amLoopDetected                   MI  gen      0         0
  2003 tmnxDot30amLoopCleared                    MI  gen      0         0
FILTER:
  2001 tIPFilterPBRPacketsDrop                   WA  gen      0         0
  2002 tFilterEntryActivationFailed               WA  gen      0         0
  2003 tFilterEntryActivationRestored             WA  gen      0         0
IGMP:
  2001 vRtrIgmpIfRxQueryVerMismatch              WA  gen      0         0
  2002 vRtrIgmpIfCModeRxQueryMismatch            WA  gen      0         0
  2003 vRtrIgmpMaxGrpsLimitExceeded              WA  gen      0         0
  2004 vRtrIgmpMcacPlcyDropped                   WA  gen      0         0
IP:
L  2001 clearRTMError                             MI  gen      0         0
L  2002 ipEtherBroadcast                         MI  gen      0         0
L  2003 ipDuplicateAddress                       MI  gen      0         0
L  2004 ipArpInfoOverwritten                     MI  gen      0         0
L  2005 fibAddFailed                             MA  gen      0         0
...
SYSTEM:
  2001 stiDateAndTimeChanged                      WA  gen      0         0
  2002 ssiSaveConfigSucceeded                     MA  gen      1         0
  2003 ssiSaveConfigFailed                        CR  gen      1         0
  2004 sbiBootConfig                             MA  gen      1         0
  2005 sbiBootSnmpd                              MA  gen      1         0
...
VRTR:
  2001 tmnxVRtrMidRouteTCA                        MI  gen      0         0
  2002 tmnxVRtrHighRouteTCA                      MI  gen      0         0
  2003 tmnxVRtrHighRouteCleared                  MI  gen      0         0
...
=====
router#
```

5.3.3 Log manager and event logs

Events that are forwarded by event control are sent to the log manager. The log manager manages the event logs in the system and the relationships between the log sources, event logs and log destinations, and log filter policies.

An event log has the following properties:

- a unique log ID
- the log ID is a short, numeric identifier for the event log (a maximum of ten logs can be configured at a time)
- one or more log sources
- the source stream or streams to be sent to log destinations can be specified. The source must be identified before the destination can be specified. The events can be from the main event stream, events in the security event stream, or events in the user activity stream
- one event log destination
- a log can only have a single destination (the destination for the log ID destination can be one of console, session, syslog, snmp-trap-group, memory, or a file on the local file system)
- an optional event filter policy
- an event filter policy defines whether to forward or drop an event or trap-based on match criteria

5.3.4 Event filter policies

The log manager uses event filter policies to allow fine control over which events are forwarded or dropped based on various criteria. Like other policies with the 7210 SAS, filter policies have a default action. The default actions are either:

- Forward
- Drop

Filter policies also include a number of filter policy entries that are identified with an entry ID and define specific match criteria and a forward or drop action for the match criteria.

Each entry contains a combination of matching criteria that define the application, event number, router, severity, and subject conditions. The entry's action determines how the packets should be treated if they have met the match criteria.

Entries are evaluated in order from the lowest to the highest entry ID. The first matching event is subject to the forward or drop action for that entry.

Valid operators are listed in the following table.

Table 50: Valid filter policy operators

Operator	Description
eq	equal to
neq	not equal to
lt	less than
lte	less than or equal to
gt	greater than
gte	greater than or equal to

A match criteria entry can include combinations of:

- equal to or not equal to a specific system application
- equal to, not equal to, less than, less than or equal to, greater than or greater than or equal to an event number within the application
- equal to, not equal to, less than, less than or equal to, greater than or greater than or equal to a severity level
- equal to or not equal to a router name string or regular expression match
- equal to or not equal to an event subject string or regular expression match

5.3.5 Event log entries

Log entries that are forwarded to a destination are formatted in a way appropriate for the specific destination whether it be recorded to a file or sent as an SNMP trap, but log event entries have common elements or properties. All application generated events have the following properties:

- a time stamp in UTC or local time
- the generating application
- a unique event ID within the application
- a router name identifying the VRF-ID that generated the event
- a subject identifying the affected object
- a short text description

The general format for an event in an event log with either a memory, console or file destination is as follows.

```
nnnn YYYY/MM/DD HH:MM:SS.SS <severity>:<application> # <event_id> <router-name> <subject> description
```

The following is an event log example:

```
475 2006/11/27 00:19:40.38 WARNING: SNMP #2007 Base 1/1/1  
"interface 1/1/1 came up"
```

The specific elements that compose the general format are described in the following table.

Table 51: Log entry field descriptions

Label	Description
nnnn	The log entry sequence number.
YYYY/MM/DD	The UTC date stamp for the log entry. YYYY — year MM — month DD — date
HH:MM:SS.SS	The UTC time stamp for the event.

Label	Description
	<i>HH</i> — hours (24 hour format) <i>MM</i> — minutes <i>SS.SS</i> — seconds
<severity>	The severity level name of the event. CLEARED — a cleared event (severity number 1) INFO — an indeterminate/informational severity event (severity level 2) CRITICAL — a critical severity event (severity level 3) MAJOR — a major severity event (severity level 4) MINOR — a minor severity event (severity level 5) WARNING — a warning severity event (severity 6)
<application>	The application generating the log message.
<event_id>	The application's event ID number for the event.
<router>	The router name representing the VRF-ID that generated the event.
<subject>	The subject/affected object for the event.
<description>	A text description of the event.

5.3.6 Simple logger event throttling

Simple event throttling provides a mechanism to protect event receivers from being overloaded when a scenario causes many events to be generated in a very short period of time. A throttling rate, # events/ # seconds, can be configured. Specific event types can be configured to be throttled. After the throttling event limit is exceeded in a throttling interval, any further events of that type cause the dropped events counter to be incremented. Dropped events counts are displayed by the **show>log>event-control** context. Events are dropped before being sent to one of the logger event collector tasks. There is no record of the details of the dropped events and therefore no way to retrieve event history data lost by this throttling method.

A specific event type can be generated by multiple managed objects within the system. At the point this throttling method is applied the logger application has no information about the managed object that generated the event and cannot distinguish between events generated by object "A" from events generated by object "B". If the events have the same event-id, they are throttled regardless of the managed object that generated them. It also does not know which events may eventually be logged to destination log-id <n> from events that will be logged to destination log-id <m>.

Throttle rate applies commonly to all event types. It is not configurable for a specific event-type. A timer task checks for events dropped by throttling when the throttle interval expires. If any events have been dropped, a TIMETRA-SYSTEM-MIB::tmnxTrapDropped notification is sent.

5.3.7 Default system log

Log 99 is a preconfigured memory-based log that logs events from the main event source (not security, debug, and so on). Log 99 exists by default.

Example: Log 99 configuration

```
ALA-1>config>log# info detail
#-----
echo "Log Configuration "
#-----
...
    snmp-trap-group 7
    exit
...
    log-id 99
        description "Default system log"
        no filter
        from main
        to memory 500
        no shutdown
    exit
#-----
ALA-1>config>log#
```

5.3.8 Event handling system



Note:

The event handling system (EHS) tool is only supported on the 7210 SAS-Dxp.


The EHS tool allows operator-defined behavior to be configured on the router. EHS adds user-controlled programmatic handling by allowing the execution of a CLI script upon the detection of a log event (the "trigger"). Regular expression type of pattern matching is available for various fields in the log event to give flexibility in the trigger definition.

EHS handler objects are used to tie together the following:

- trigger events (typically log events that match some configurable criteria)
- a set of actions to perform (typically one or more CLI scripts)

EHS makes use of the generic CLI script-control functions for scripts. Any command available in the CLI (with some limited exceptions, such as **candidate** commands) can be executed in a script as the result of an EHS handler being triggered. The following figure illustrates the relationships between the different configurable objects used by EHS.

Figure 9: EHS object relationships

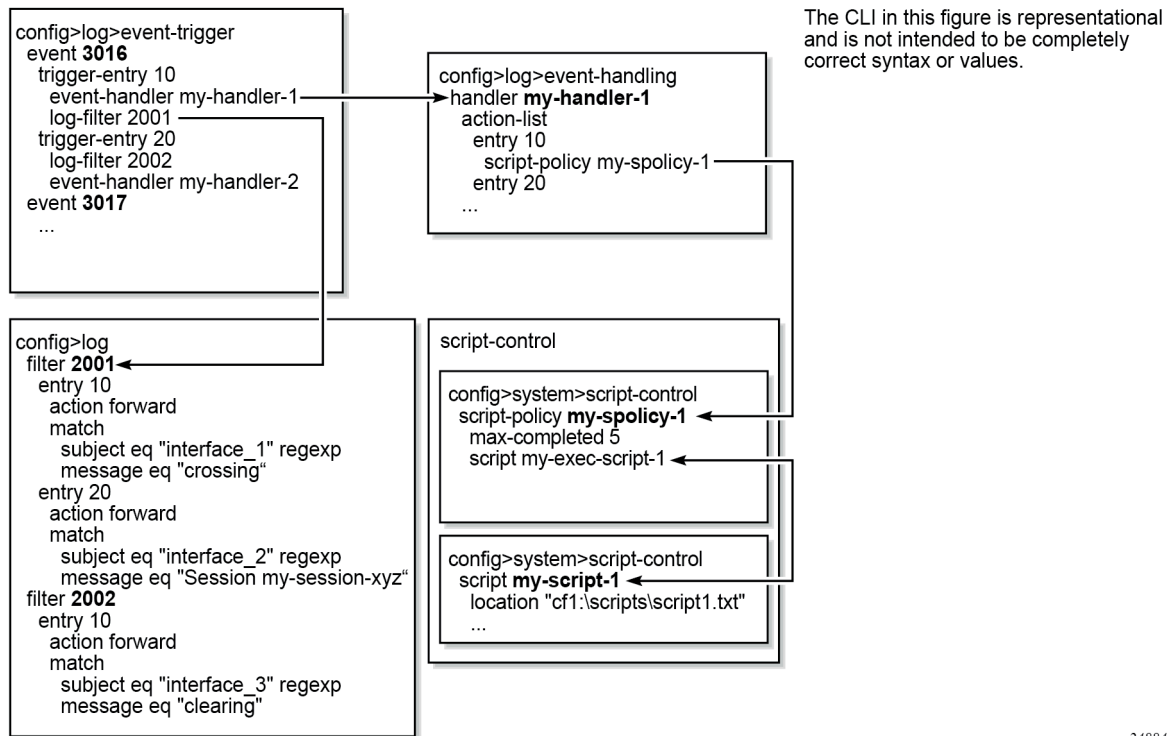

24884

Complex rules can be configured to match on log events as a trigger for an EHS handler.

When a log event is generated in SR OS, it is subject to discard using suppression and throttling (**config>log>event-control**) before it is evaluated as a trigger for EHS:

- EHS does not trigger on log events that are suppressed through **config>log>event-control**
- EHS does not trigger on log events that are throttled by the logger

EHS triggers on log events that are dropped by user-configured log filters assigned to individual logs (**config>log>filter**). The EHS event trigger logic occurs before the distribution of log event streams into individual logs.

A triggering log event's common parameters and varbinds are passed in to the triggered EHS script and can be used within the EHS script as passed in dynamic variables. Passed in dynamic variables are:

- the common event parameters appid, name, eventid, severity, subject, and gentime
- the predefined varbinds in a log event's message

For example, the following are the passed in dynamic variables for an event:

- appid
- eventid
- severity
- subject
- gentime
- event_varbind_1

- event_varbind_2
- event_varbind_N



Note:

- The passed in event's gentime is always UTC.
- The event's sequence number is not passed in to the script.

An EHS script has the ability to define local static variables and use basic `.if` and `.set` commands in the script. The use of variables with the `.if` and `.set` commands within an EHS script adds more logic to EHS scripting and allows the reuse of a single EHS script for more than one trigger or action.

Both imported and local variables can be used within the EHS script, either as part of the CLI commands or as part of the `.if` or `.set` commands.

The following applies to both CLI commands and `.if` or `.set` commands:

- Using `$X` without using single or double quotes, replaces the variable `X` with its string or integer value.
- Using `"X"` with double quotes, means the literal string `X`.
- Using `"$X"` with double quotes, replaces the variable `X` with its string or integer value.
- Using `'X'` with single quotes, means the literal string `X`.
- Using `'$X'` with single quotes, does not replace the variable `X` with its value but means the literal string `$X`.

In summary:

- All characters enclosed within single quotes are interpreted as a string character.
- All characters enclosed within double quotes are interpreted as regular characters except for `$`, which replaces the variable with its value (for example, shell expansion inside a string).

5.3.8.1 Supported shell command scenarios and examples

Some supported shell command scenarios are (the following are pseudo commands):

- `.if $string_variable==string_value_or_string_variable {`
 `CLI_commands_set1`
 `.} else {`
 `CLI_commands_set2`
 `.} endif`
- `.if ($string_variable==string_value_or_string_variable) {`
 `CLI_commands_set1`
 `.} else {`
 `CLI_commands_set2`
 `.} endif`
- `.if $integer_variable==integer_value_or_integer_variable {`
 `CLI_commands_set1`
 `.} else {`

```
CLI_commands_set2
} endif
• .if ($integer_variable==integer_value_or_integer_variable) {
CLI_commands_set1
} else {
CLI_commands_set2
} endif
• .if $string_variable!=string_value_or_string_variable {
CLI_commands_set1
} else {
CLI_commands_set2
} endif
• .if ($string_variable!=string_value_or_string_variable) {
CLI_commands_set1
} else {
CLI_commands_set2
} endif
• .if $integer_variable!=integer_value_or_integer_variable {
CLI_commands_set1
} else {
CLI_commands_set2
} endif
• .if ($integer_variable!=integer_value_or_integer_variable) {
CLI_commands_set1
} else {
CLI_commands_set2
} endif
• .set $string_variable = string_value_or_string_variable
• .set ($string_variable = string_value_or_string_variable)
• .set $integer_variable = integer_value_or_integer_variable
• .set ($integer_variable = integer_value_or_integer_variable)
```

where:

- *CLI_commands_set1* is a set of one or more CLI commands
- *CLI_commands_set2* is a set of one or more CLI commands
- *string_variable* is a local (static) string variable
- *string_value_or_string_variable* is a string value/variable

- *integer_variable* is a local (static) integer variable
- *integer_value_or_integer_variable* is an integer value/variable



Note:

- A limit of 100 local static variables per EHS script is imposed. Exceeding this limit may result in an error and partial execution of the script.
- When a set statement is used to set a *string_variable* to a *string_value*, the *string_value* can be any non-integer value not enclosed in single or double quotes or it can be enclosed in single or double quotes.
- A "." preceding a directive (for example, if, set, and so on) is always expected to start a new line.
- An end of line is always expected after {.
- A CLI command is always expected to start a new line.
- Passed-in dynamic variables are always read-only inside an EHS script and cannot be overwritten using a set statement.
- .if commands support == and != operators only.
- .if and .set commands support addition, subtraction, multiplication, and division of integers.
- .if and .set commands support addition, which means concatenation, of strings.

Valid examples:

- configure service epipe \$serviceID
where *\$serviceID* is either a local static integer variable or passed-in (dynamic) integer variable
- echo srcAddr is \$srcAddr
where *\$srcAddr* is a passed-in dynamic string variable
- .set \$ipAddr = "10.0.0.1"
where *\$ipAddr* is a local static string variable
- .set \$ipAddr = \$srcAddr
where *\$srcAddr* is a passed-in dynamic string variable
\$ipAddr is a local static string variable.
- .set (\$customerID = 50)
where *\$customerID* is a local static integer variable
- .set (\$totalPackets = \$numIngrPackets + \$numEgrPackets)
where *\$totalPackets*, *\$numIngrPackets*, *\$numEgrPackets* are local (static) integer variables
- .set (\$portDescription = \$portName + \$portLocation)
where *\$portDescription*, *\$portName*, *\$portLocation* are local (static) string variables
- if (\$srcAddr == "CONSOLE") {
CLI_commands_set1
.else {
CLI_commands_set2

```
.} endif
```

where *\$srcAddr* is a passed-in dynamic string variable

CLI_commands_set1 is a set of one or more CLI commands

CLI_commands_set2 is a set of one or more CLI commands

- ```
.if ($customerId == 10) {
```

```
CLI_commands_set1
```

```
.else {
```

```
CLI_commands_set2
```

```
.} endif
```

where *\$customerID* is a passed-in dynamic integer variable *CLI\_commands\_set1* is a set of one or more CLI commands

*CLI\_commands\_set2* is a set of one or more CLI commands

- ```
.if ($numIngrPackets == $numEgrPackets) {
```

```
CLI_commands_set1
```

```
.else {
```

```
CLI_commands_set2
```

```
.} endif
```

where *\$numIngrPackets* and *\$numEgrPackets* are local static integer variables

CLI_commands_set1 is a set of one or more CLI commands

CLI_commands_set2 is a set of one or more CLI commands

Invalid examples:

- ```
.set $srcAddr = "10.0.0.1"
```

where *\$srcAddr* is a passed-in dynamic string variable

Reason: passed-in variables are read only inside an EHS script.

- ```
.set ($ipAddr = $numIngrPackets + $numEgrPackets)
```

where *\$ipAddr* is a local (static) string variable

\$numIngrPackets and *\$numEgrPackets* are local static integer variables

Reason: variable types do not match, cannot assign a string to an integer.

- ```
.set ($numIngrPackets = $ipAddr + $numEgrPackets)
```

where *\$ipAddr* is a local static string variable

*\$numIngrPackets* and *\$numEgrPackets* are local static integer variables

Reason: variable types do not match, cannot concatenate a string to an integer.

- ```
.set $ipAddr = "10.0.0.1"100
```

where *\$ipAddr* is a local static string variable

Reason: when double quotes are used, they have to surround the entire string.

- ```
.if ($totalPackets == "10.1.1.1") {
```

```
.} endif
```

where *\$totalPackets* is a local static integer variables

Reason: cannot compare an integer variable to a string value.

- ```
.if ($ipAddr == 10) {  
.} endif
```

where *\$ipAddr* is a local static string variable

Reason: cannot compare a string variable to an integer value.

- ```
.if ($totalPackets == $ipAddr) {
```

where *\$totalPackets* is a local static integer variables

*\$ipAddr* is a local static string variable

Reason: cannot compare an integer variable to a string variable.

### 5.3.8.2 EHS support on 7210 SAS



**Note:**

On the 7210 SAS, EHS script triggers are limited to these dot1x events. They cannot be used with any other events though it is not blocked in the software.

On the 7210 SAS, an EHS script is triggered for the following dot1x events only:

- *tmnxPortDot1xAuthSuccess* - triggered upon successful authentication of user/device using dot1x RADIUS authentication
- *tmnxPortDot1xAuthLost* - triggered upon loss of authentication, either because the device disconnected or the device sent an EAP-Logoff message, or because of subsequent unsuccessful authentication when reauthentication is attempted
- *tmnxPortDot1xAuthLostGRvC* - triggered when the RADIUS server returns an authentication failure and there is no response from the RADIUS server, or if dot1x authentication is enabled on a port but no EAPOL packets are received from the connected device
- *tmnxPortDot1xAuthLostGRvD* - triggered when the previously created SAP in the guest or restricted VLAN service must be deleted because of the successful reauthentication of the connected device, device disconnection, or the device sends an EAP-Logoff message

Users can configure an EHS script to associate an authenticated port or MAC with a service and SAP that is provisioned based on the VLAN-ID provided by the RADIUS server upon a successful authentication. The software invokes the EHS script when the *tmnxPortDot1xAuthSuccess* event is triggered.

Users can also configure an EHS script to associate the port or MAC with a service and SAP that is provisioned using the **config>port>ethernet>dot1x>guest-service** *service-id* [*vlan-id* *vlan-id*] and **config>port>ethernet>dot1x>restricted-service** *service-id* [*vlan-id* *vlan-id*] commands. The software invokes the EHS script when the *tmnxPortDot1xAuthLostGRvC* event is triggered so that the corresponding port or MAC can be associated with a guest or restricted VLAN service.

#### Example: EHS script configuration for a SAP in a service

The following EHS script provides an example of:

- SAP creation and association with the VPLS service when the dot1x event *tmnxPortDot1xAuthSuccess* is generated

- SAP deletion after it is shut down when the dot1x event tmnxPortDot1xAuthLost is generated

The VLAN ID returned by the RADIUS server is used as the service-delimiting VLAN tag of the newly created SAP, and also used to identify the VPLS service ID. See the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Services Guide* for configuration guidelines of a VLAN ID returned by the RADIUS server.

```
exit all

.if $eventid == 3016 (tmnxPortDot1xAuthSuccess) {

echo $tmnxPortNotifyPortId
echo $tmnxPortDot1xVlanId

.set ($sapStr = $tmnxPortNotifyPortId + ":" + "$tmnxPortDot1xVlanId")

/configure service vpls $tmnxPortDot1xVlanId sap $sapStr create
exit all

.} endif

.if $eventid == 3017 (tmnxPortDot1xAuthLost) {
exit all

echo $tmnxPortNotifyPortId
echo $tmnxPortDot1xVlanId
.set ($sapStr = $tmnxPortNotifyPortId + ":" + "$tmnxPortDot1xVlanId")
/configure service vpls $tmnxPortDot1xVlanId sap $sapStr shutdown
/configure service vpls $tmnxPortDot1xVlanId no sap $sapStr
exit all

.} endif
```

### Example: Node configuration for an EHS script



**Note:**

The dot1x configuration per port is not displayed in the following example.

```
system
 script-control
 script <script-name>
 location <ehs-script-path>
 no shutdown
 exit
 script-policy <script-policy-name>
 results <results-path>
 script <script-name>
 no shutdown
 exit
 exit
exit

log
 filter 11
 default-action drop
 entry 11
 action forward
 exit
 exit
```



```
event-handling
 handler <handler-name>
 action-list
 entry 11
 script-policy <script-policy-name> ==> created under system ==>
script-control
 no shutdown
 exit
 exit
 no shutdown
 exit
 exit
event-trigger
 event "port" 3016
 trigger-entry 1
 event-handler <handler-name>
 log-filter 11
 no shutdown
 exit
 no shutdown
 exit
 event "port" 3017
 trigger-entry 1
 event-handler <handler-name>
 log-filter 11
 no shutdown
 exit
 no shutdown
 exit
 exit
 exit
```

### Example: Restricted and guest VLAN configuration

The following provides an example of an EHS script used for SAP creation and deletion in a guest or restricted VLAN service.

```
.if $eventid == 3018 (tmnxPortDot1xAuthLostGRvC){
echo $name
echo $tmnxPortNotifyPortId
echo $tmnxPortDot1xVlanId
echo $tmnxPortDot1xGRSvcId

.set ($sapStr = $tmnxPortNotifyPortId + ":" + "$tmnxPortDot1xVlanId")
echo $sapStr
.if $tmnxPortDot1xGRSvcId == 1 {
/configure service vpls $tmnxPortDot1xGRSvcId sap $sapStr create
/configure service vpls $tmnxPortDot1xGRSvcId sap $sapStr no shutdown
exit all
.} endif

.if $tmnxPortDot1xGRSvcId == 2 {
/configure service epipe $tmnxPortDot1xGRSvcId sap $sapStr create
/configure service epipe $tmnxPortDot1xGRSvcId sap $sapStr no shutdown
exit all
.} endif
.} endif

.if $eventid == 3019 (tmnxPortDot1xAuthLostGRvD){
echo $name
.set ($sapStr = $tmnxPortNotifyPortId + ":" + "$tmnxPortDot1xVlanId")
```

```
.if $tmnxPortDotlXGRSvcId == 1 {
/configure service vpls $tmnxPortDotlXGRSvcId sap $sapStr shutdown
/configure service vpls $tmnxPortDotlXGRSvcId no sap $sapStr
.} endif

.if $tmnxPortDotlXGRSvcId == 2 {
/configure service epipe $tmnxPortDotlXGRSvcId sap $sapStr shutdown
/configure service epipe $tmnxPortDotlXGRSvcId no sap $sapStr
.} endif
.} endif
```

## 5.4 Accounting logs

Before an accounting policy can be created, a target log file must be created to collect the accounting records. The files are stored in system memory on compact flash (cfl:) in a compressed (tar) XML format and can be retrieved using FTP or SCP.

A file ID can only be assigned to either one event log ID or one accounting log.

### 5.4.1 Accounting records

An accounting policy must define a record name and collection interval. Only one record name can be configured per accounting policy. Also, a record name can only be used in one accounting policy.

When creating accounting policies, one service accounting policy and one network accounting policy can be defined as default. If statistics collection is enabled on a SAP, access-uplink, or network port and no accounting policy is applied, then the respective default policy is used. If no default policy is defined, then no statistics are collected unless a specifically defined accounting policy is applied.

The record name, sub-record types, and default collection period for service and network accounting policies are listed in [Table 52: Accounting record names and collection periods for 7210 SAS-D](#), [Table 53: Accounting record names and collection periods for 7210 SAS-Dxp](#), [Table 54: Accounting record names and collection periods for 7210 SAS-K 2F1C2T](#), [Table 55: Accounting record names and collection periods for 7210 SAS-K 2F6C4T](#), and [Table 56: Accounting record names and collection periods for 7210 SAS-K 3SFP+ 8C](#).

### 5.4.2 Accounting record names and collection periods

Table 52: Accounting record names and collection periods for 7210 SAS-D

| Record name             | Sub-record types | Accounting object | Default collection period (minutes) |
|-------------------------|------------------|-------------------|-------------------------------------|
| service-ingress-octets  | sio              | Access SAP        | 5                                   |
| service-egress-octets   | seo              | Access SAP        | 5                                   |
| service-ingress-packets | sip              | Access SAP        | 5                                   |

| Record name                            | Sub-record types   | Accounting object  | Default collection period (minutes) |
|----------------------------------------|--------------------|--------------------|-------------------------------------|
| service-egress-packets                 | sep                | Access SAP         | 5                                   |
| combined-service-ingress               | sip, sio           | Access SAP         | 5                                   |
| combined-service-egress                | seo, sep           | Access SAP         | 5                                   |
| complete-service-ingress-egress        | sip, sio, seo, sep | Access SAP         | 5                                   |
| access-egress-packets                  | aep                | Access-port        | 5                                   |
| access-egress-octets                   | aeo                | Access-port        | 5                                   |
| combined-access-egress                 | cmAeo, cmAep       | Access-port        | 5                                   |
| network-ingress-octets                 | nio                | Access-uplink-port | 15                                  |
| network-ingress-packets                | nip                | Access-uplink-port | 15                                  |
| network-egress-octets                  | neo                | Access-uplink-port | 15                                  |
| network-egress-packets                 | neo                | Access-uplink-port | 15                                  |
| combined-network-egress                | cmNeo, cmNep       | Access-uplink-port | 15                                  |
| combined-network-ingress-egress-octets | cmNio, cmNeo       | Access-uplink-port | 15                                  |
| saa                                    |                    |                    | 5                                   |

Table 53: Accounting record names and collection periods for 7210 SAS-Dxp

| Record name                     | Sub-record types   | Accounting object | Default collection period (minutes) |
|---------------------------------|--------------------|-------------------|-------------------------------------|
| service-ingress-octets          | sio                | Access SAP        | 5                                   |
| service-egress-octets           | seo                | Access SAP        | 5                                   |
| service-ingress-packets         | sip                | Access SAP        | 5                                   |
| service-egress-packets          | sep                | Access SAP        | 5                                   |
| combined-service-ingress        | sip, sio           | Access SAP        | 5                                   |
| combined-service-egress         | seo, sep           | Access SAP        | 5                                   |
| complete-service-ingress-egress | sip, sio, seo, sep | Access SAP        | 5                                   |
| access-egress-packets           | aep                | Access-port       | 5                                   |

| Record name                            | Sub-record types | Accounting object  | Default collection period (minutes) |
|----------------------------------------|------------------|--------------------|-------------------------------------|
| access-egress-octets                   | aeo              | Access-port        | 5                                   |
| combined-access-egress                 | cmAeo, cmAep     | Access-port        | 5                                   |
| network-ingress-octets                 | nio              | Access-uplink-port | 15                                  |
| network-ingress-packets                | nip              | Access-uplink-port | 15                                  |
| network-egress-octets                  | neo              | Access-uplink-port | 15                                  |
| network-egress-packets                 | nep              | Access-uplink-port | 15                                  |
| combined-network-egress                | cmNeo, cmNep     | Access-uplink-port | 15                                  |
| combined-network-ingress-egress-octets | cmNio, cmNeo     | Access-uplink-port | 15                                  |
| saa                                    |                  |                    | 5                                   |
| complete-pm                            |                  |                    | 5                                   |

Table 54: Accounting record names and collection periods for 7210 SAS-K 2F1C2T

| Record name                     | Sub-record types   | Accounting object  | Default collection period (minutes) |
|---------------------------------|--------------------|--------------------|-------------------------------------|
| service-ingress-octets          | sio                | Access SAP         | 5                                   |
| service-egress-octets           | seo                | Access SAP         | 5                                   |
| service-ingress-packets         | sip                | Access SAP         | 5                                   |
| service-egress-packets          | sep                | Access SAP         | 5                                   |
| combined-service-ingress        | sip, sio           | Access SAP         | 5                                   |
| combined-service-egress         | seo, sep           | Access SAP         | 5                                   |
| complete-service-ingress-egress | sip, sio, seo, sep | Access SAP         | 5                                   |
| network-ingress-octets          | nio                | Access-uplink-port | 15                                  |
| network-ingress-packets         | nip                | Access-uplink-port | 15                                  |
| network-egress-octets           | neo                | Access-uplink-port | 15                                  |
| network-egress-packets          | neo                | Access-uplink-port | 15                                  |
| combined-network-egress         | cmNeo, cmNep       | Access-uplink-port | 15                                  |

| Record name                            | Sub-record types | Accounting object  | Default collection period (minutes) |
|----------------------------------------|------------------|--------------------|-------------------------------------|
| combined-network-ingress-egress-octets | cmNio, cmNeo     | Access-uplink-port | 15                                  |
| saa                                    |                  |                    | 5                                   |
| y1564                                  |                  |                    | 5                                   |
| complete-pm                            |                  |                    | 5                                   |

Table 55: Accounting record names and collection periods for 7210 SAS-K 2F6C4T

| Record name                            | Sub-record types   | Accounting object                   | Default collection period (minutes) |
|----------------------------------------|--------------------|-------------------------------------|-------------------------------------|
| service-ingress-octets                 | sio                | Access SAP                          | 5                                   |
| service-egress-octets                  | seo                | Access SAP                          | 5                                   |
| service-ingress-packets                | sip                | Access SAP                          | 5                                   |
| service-egress-packets                 | sep                | Access SAP                          | 5                                   |
| combined-service-ingress               | sip, sio           | Access SAP                          | 5                                   |
| combined-service-egress                | seo, sep           | Access SAP                          | 5                                   |
| complete-service-ingress-egress        | sip, sio, seo, sep | Access SAP                          | 5                                   |
| combined-access-egress                 | cmAeo, cmAep       | Access-port                         | 5                                   |
| network-ingress-octets                 | nio                | Access-uplink-port and Network port | 15                                  |
| network-ingress-packets                | nip                | Access-uplink-port and Network port | 15                                  |
| network-egress-octets                  | neo                | Access-uplink-port and Network port | 15                                  |
| network-egress-packets                 | neo                | Access-uplink-port and Network port | 15                                  |
| combined-network-egress                | cmNeo, cmNep       | Access-uplink-port and Network port | 15                                  |
| combined-network-ingress-egress-octets | cmNio, cmNeo       | Access-uplink-port and Network port | 15                                  |

| Record name | Sub-record types | Accounting object | Default collection period (minutes) |
|-------------|------------------|-------------------|-------------------------------------|
| saa         |                  |                   | 5                                   |
| y1564       |                  |                   | 5                                   |
| complete-pm |                  |                   | 5                                   |

Table 56: Accounting record names and collection periods for 7210 SAS-K 3SFP+ 8C

| Record name                            | Sub-record types   | Accounting object                   | Default collection period (minutes) |
|----------------------------------------|--------------------|-------------------------------------|-------------------------------------|
| service-ingress-octets                 | sio                | Access SAP                          | 5                                   |
| service-egress-octets                  | seo                | Access SAP                          | 5                                   |
| service-ingress-packets                | sip                | Access SAP                          | 5                                   |
| service-egress-packets                 | sep                | Access SAP                          | 5                                   |
| combined-service-ingress               | sip, sio           | Access SAP                          | 5                                   |
| combined-service-egress                | seo, sep           | Access SAP                          | 5                                   |
| complete-service-ingress-egress        | sip, sio, seo, sep | Access SAP                          | 5                                   |
| combined-access-egress                 | cmAeo, cmAep       | Access-port                         | 5                                   |
| network-ingress-octets                 | nio                | Access-uplink-port and Network port | 15                                  |
| network-ingress-packets                | nip                | Access-uplink-port and Network port | 15                                  |
| network-egress-octets                  | neo                | Access-uplink-port and Network port | 15                                  |
| network-egress-packets                 | neo                | Access-uplink-port and Network port | 15                                  |
| combined-network-egress                | cmNeo, cmNep       | Access-uplink-port and Network port | 15                                  |
| combined-network-ingress-egress-octets | cmNio, cmNeo       | Access-uplink-port and Network port | 15                                  |
| saa                                    |                    |                                     | 5                                   |
| y1564                                  |                    |                                     | 5                                   |

| Record name | Sub-record types | Accounting object | Default collection period (minutes) |
|-------------|------------------|-------------------|-------------------------------------|
| complete-pm |                  |                   | 5                                   |

### 5.4.3 Accounting record details

Each accounting record name is composed of one or more sub-records, which are in turn composed of multiple fields.

See [Appendix: accounting record name details for 7210 SAS platforms](#) for more information about accounting records and statistics for the 7210 SAS platforms.

### 5.4.4 Configuration guidelines

The following information describes configuration guidelines:

- On the 7210 SAS-D and 7210 SAS-Dxp, the ingress SAP counter counts both octets and packets simultaneously.
- On the 7210 SAS-D, the egress SAP counter is disabled by default.
- Ensure that egress SAP counters are enabled on 7210 SAS-D devices before associating accounting records of type service-egress-octets, service-egress-packets, combined-service-egress and complete-service-ingress-egress.
- Before modifying the counter mode, disable account log generation. Execute the **no collect-stats** command. Changing the mode of the counter results in loss of previously collected counts and resets the counter.
- Egress SAP statistics are not available on any of the SAPs of a port on which a dot1q SAP and dot1q default SAP configuration are present at the same time.
- On the 7210 SAS-D and 7210 SAS-Dxp for VLL and VPLS services, the counter-mode of counters associated with SAP ingress meters/policers can be changed by executing the following command:

For 7210 SAS-D and 7210 SAS-Dxp devices — **config>service>epipe/  
vpls>sap>statistics>ingress>counter-mode {in-out-profile-count | forward-drop-count}**

For more information about the **counter-mode** command, See the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C Services Guide*.

The statistics collected for the following accounting records vary based on the counter-mode selected:

- Service-ingress-octets
- Service-ingress-packets
- Combined-service-ingress
- Complete-service-ingress-egress

### 5.4.5 Reporting and time-based accounting

Node support for volume and time-based accounting concept provides an extra level of intelligence at the network element level to provide service models such as “prepaid access” in a scalable manner. This means that the network element gathers and stores per-subscriber accounting information and compare it with predefined quotas. After a quota is exceeded, the predefined action (such as redirection to a web portal or disconnect) is applied.

## 5.5 Configuration notes

This following information describes logging configuration restrictions:

- A file or filter cannot be deleted if it has been applied to a log.
- File IDs, syslog IDs, or SNMP trap groups must be configured before they can be applied to a log ID.
- A file ID can only be assigned to either one log ID or one accounting policy.
- Accounting policies must be configured in the **config>log** context before they can be applied to a service SAP or service interface, or applied to a network port.
- The *snmp-trap-id* must be the same as the *log-id*.

## 5.6 Configuring logging with CLI

This section provides information to configure logging using the command line interface.

### 5.6.1 Log configuration overview

Configure logging parameters to save information in a log file or direct the messages to other devices. Logging does the following:

- provides you with logging information for monitoring and troubleshooting
- allows you to select the types of logging information to be recorded
- allows you to assign a severity to the log messages
- allows you to select the source and target of logging information

#### 5.6.1.1 Log types

Logs can be configured in the following contexts:

- **Log file**

Log files can contain log event message streams or accounting/billing information. Log file IDs are used to direct events, alarms/traps and debug information to their respective targets.

- **SNMP trap groups**



SNMP trap groups contain an IP address and community names which identify targets to send traps following specified events.

- **Syslog**

Information can be sent to a syslog host that is capable of receiving selected syslog messages from a network element.

- **Event control**

Configures a particular event or all events associated with an application to be generated or suppressed.

- **Event filters**

An event filter defines whether to forward or drop an event or trap based on match criteria.

- **Accounting policies**

An accounting policy defines the accounting records that will be created. Accounting policies can be applied to one or more service access points (SAPs), access-uplink (network) ports, and access ports.

- **Event logs**

An event log defines the types of events to be delivered to its associated destination.

- **Event throttling rate**

Defines the rate of throttling events.

## 5.6.2 Basic event log configuration

The most basic log configuration must have the following:

- log ID or accounting policy ID
- a log source
- a log destination

### Example: Log configuration

```
A:ALA-12>config>log# info
#-----
echo "Log Configuration "
#-----
 event-control 2001 generate critical
 file-id 1
 description "This is a test file-id."
 location cf1:
 exit
 file-id 2
 description "This is a test log."
 location cf1:
 exit
 snmp-trap-group 7
 trap-target 11.22.33.44 "snmpv2c" notify-community "public"
 exit
 log-id 2
 from main
 to file 2
 exit
#-----
```

```
A:ALA-12>config>log#
```

## 5.6.3 Common configuration tasks

The following sections describe basic system tasks that must be performed.

### 5.6.3.1 Configuring an event log

A event log file contains information used to direct events, alarms, traps, and debug information to their respective destinations. One or more event sources can be specified. File IDs, SNMP trap groups, or syslog IDs must be configured before they can be applied to an event log ID.

Use the following CLI syntax to configure a log file:

```
config>log
 log-id log-id
 description description-string
 filter filter-id
 from {[main] [security] [change] [debug-trace]}
 to console
 to file file-id
 to memory [size]
 to session
 to snmp [size]
 to syslog syslog-id
 time-format {local|utc}
 no shutdown
```

#### Example: Log file configuration

```
ALA-12>config>log>log-id# info

...
log-id 2
 description "This is a test log file."
 filter 1
 from main security
 to file 1
exit
...

ALA-12>config>log>log-id#
```

### 5.6.3.2 Configuring a file ID

To create a log file, a file ID is defined, the target CF or USB drive is specified, and the rollover retention interval period for the log file is defined. The rollover interval is defined in minutes and determines how long a file is used before it is closed and a new log file is created. The retention interval determines how long the file is stored on the storage device before it is deleted.

Use the following CLI syntax to configure a log file:

```
config>log
 file-id log-file-id
```

```
description description-string
location cflash-id
rollover minutes [retention hours]
```

### Example: log file configuration

```
A:ALA-12>config>log# info

file-id 1
description "This is a log file."
location cf1:
rollover 600 retention 24
exit

A:ALA-12>config>log#
```

### 5.6.3.3 Configuring an accounting policy

Before an accounting policy can be created a target log file must be created to collect the accounting records. The files are stored in system memory of compact flash (cf1:) in a compressed (tar) XML format and can be retrieved using FTP or SCP. See [Configuring an event log](#) and [Configuring a file ID](#).

Accounting policies must be configured in the **config>log** context before they can be applied to a service SAP or service interface, or applied to a network port.

The default accounting policy statement cannot be applied to LDP nor RSVP statistics collection records.

An accounting policy must define a record type and collection interval. Only one record type can be configured per accounting policy.

policy can be defined as default. If statistics collection is enabled on an accounting object, and no accounting policy is applied, then the respective default accounting policy is used. If no default policy is defined, then no statistics are collected unless a specifically-defined accounting policy is applied.

Use the following CLI syntax to configure an accounting policy:

```
config>log>
 accounting-policy acct-policy-id interval minutes
 description description-string
 default
 record record-name
 to file log-file-id
 no shutdown
```

### Example: Accounting policy configuration

```
A:ALA-12>config>log# info

accounting-policy 5
description "This is a test accounting policy."
record service-ingress-packets
to file 3
exit

A:ALA-12>config>log#
```

### 5.6.3.4 Configuring event control

Use the following CLI syntax to configure event control. Note that the **throttle** parameter used in the **event-control** command syntax enables throttling for a specific event type. The **config>log>throttle-rate** command configures the number of events and interval length to be applied to all event types that have throttling enabled by this **event-control** command.

```
config>log
 event-control application-id [event-name|event-number] generate [severity-level]
 [throttle]
 event-control application-id [event-name|event-number] suppress
 throttle-rate events [interval seconds]
```

#### Example: Event control configuration

```
A:ALA-12>config>log# info
#-----
echo "Log Configuration"
#-----
 throttle-rate 500 interval 10
 event-control "oam" 2001 generate throttle
 event-control "ospf" 2001 suppress
 event-control "ospf" 2003 generate cleared
 event-control "ospf" 2014 generate critical
..
#-----
A:ALA-12>config>log>filter#
```

### 5.6.3.5 Configuring throttle rate

This command configures the number of events and interval length to be applied to all event types that have throttling enabled by the **event-control** command.

Use the following CLI syntax to configure the throttle rate.

```
config>log#
 throttle-rate events [interval seconds]
```

#### Example: Throttle rate configuration

```
*A:gal171>config>log# info

 throttle-rate 500 interval 10
 event-control "aps" 2001 generate throttle

```

### 5.6.3.6 Configuring a log filter

Use the following CLI syntax to configure a log filter:

```
config>log
 filter filter-id
 default-action {drop|forward}
```

```
description description-string
entry entry-id
 action {drop|forward}
 description description-string
 match
 application {eq|neq} application-id
 number {eq|neq|lt|lte|gt|gte} event-id
 router {eq|neq} router-instance [regex]
 severity {eq|neq|lt|lte|gt|gte} severity-level
 subject {eq|neq} subject [regex]
```

### Example: Log filter configuration

```
A:ALA-12>config>log# info
#-----
echo "Log Configuration "
#-----
 file-id 1
 description "This is our log file."
 location cfl:
 rollover 600 retention 24
 exit
 filter 1
 default-action drop
 description "This is a sample filter."
 entry 1
 action forward
 match
 application eq "mirror"
 severity eq critical
 exit
 exit
 exit
...
log-id 2
 shutdown
 description "This is a test log file."
 filter 1
 from main security
 to file 1
 exit
...
#-----
```

### 5.6.3.7 Configuring an SNMP trap group

The associated *log-id* does not have to be configured before a **snmp-trap-group** can be created, however, the **snmp-trap-group** must exist before the *log-id* can be configured to use it.

Use the following CLI syntax to configure an SNMP trap group:

```
config>log
 snmp-trap-group log-id
 trap-target name [address ip-address] [port port] [snmpv1|snmpv2c| snmpv3] notify-
community communityName |snmpv3SecurityName [security-level {no-auth-no-privacy|auth-no-
privacy|privacy}]
```

### Example: Basic SNMP trap group configuration

```
A:ALA-12>config>log# info

...
snmp-trap-group 2
trap-target 10.10.10.104:5 "snmpv3" notify-community "ccommunitystring"
exit
...
log-id 2
 description "This is a test log file."
 filter 1
 from main security
 to file 1
exit
...

A:ALA-12>config>log#
```

### 5.6.3.8 Configuring SNMP dying gasp

Use the following CLI syntax to configure SNMP dying gasp:

```
config>log
 no snmp-dying-gasp primary <trap-target-group-num> < trap-target-name> [secondary
 {<trap-target-group-num><trap-target-name>} [tertiary {<trap-target-group-num> <trap-target-
 name>}]]
```

### Example: SNMP dying gasp configuration

```
*A:Dut-A>config>log# snmp-dying-gasp primary 7 server1 secondary 8 server2
*A:Dut-A>config>log# info

 snmp-trap-group 7
 trap-target "server1" address 10.1.1.1 snmpv2c notify-community "public"
 exit
 snmp-trap-group 8
 trap-target "server2" address 10.135.2.10 snmpv3 notify
community "snmpv3user" security-level auth-no-privacy
 exit
 snmp-trap-group 9
 trap-target "server3" address 10.2.2.2 snmpv3 notify
community "snmpv3user" security-level auth-no-privacy
 exit
 log-id 7
 from main
 to snmp
 exit
 log-id 8
 from main
 to snmp
 exit
 log-id 9
 from main
 to snmp
 exit
 snmp-dying-gasp primary 7 "server1" secondary 8 "server2"

*A:Dut-A>config>log#
```

### 5.6.3.8.1 Configuration guidelines for SNMP dying gasp trap

The system does not try to resolve the ARP when it needs to send out the SNMP dying-gasp trap, because the amount of time available during power loss event is very less. Instead, the system assumes that ARP entry to the gateway used to reach the SNMP trap server is always available. It is recommended that user run a periodic ping query to the SNMP trap server in the background using the cron utility.

#### Example

The following is an example configuration of a cron job that initiates a ping to the server mentioned in the pingscript file every one minute.

```
*7210-SAS># configure cron
*7210-SAS >config>cron# info

 time-range "NO-TIME-RANGE" create
 description "NO-TIME-RANGE is the default always-on time-range"
 exit

7210SAS>config>cron#
```

### 5.6.3.9 Configuring a syslog target

Log events cannot be sent to a syslog target host until a valid syslog ID exists.

Use the following CLI syntax to configure a syslog file:

```
config>log
 syslog syslog-id
 description description-string
 address ip-address
 log-prefix log-prefix-string
 port port
 level {emergency|alert|critical|error|warning|notice|info|debug}
 facility syslog-facility
```

#### Example: Syslog configuration

```
A:ALA-12>config>log# info

...
 syslog 1
 description "This is a syslog file."
 address 10.10.10.104
 facility user
 level warning
 exit
...

A:ALA-12>config>log#
```

## 5.6.4 Log management tasks

This section discusses the logging management tasks.

### 5.6.4.1 Modifying a log file

Use the following CLI syntax to modify a log file:

```
config>log
 log-id log-id
 description description-string
 filter filter-id
 from {[main] [security] [change] [debug-trace]}
 to console
 to file file-id
 to memory [size]
 to session
 to snmp [size]
 to syslog syslog-id
```

#### Example: Current log configuration

```
ALA-12>config>log>log-id# info

...
log-id 2
 description "This is a test log file."
 filter 1
 from main security
 to file 1
exit
...

ALA-12>config>log>log-id#
```

#### Example: Modifying log file parameters

```
config# log
config>log# log-id 2
config>log>log-id# description "Chassis log file."
config>log>log-id# filter 2
config>log>log-id# from security
config>log>log-id# exit
```

#### Example: Modified log file configuration

```
A:ALA-12>config>log# info

...
log-id 2
 description "Chassis log file."
 filter 2
 from security
 to file 1
exit
...

A:ALA-12>config>log#
```



### 5.6.4.2 Deleting a log file

The log ID must be shut down before it can be deleted. In a previous example, **file 1** is associated with **log-id 2**.

#### Example

```
A:ALA-12>config>log# info

file-id 1
 description "LocationTest."
 location cf1:
 rollover 600 retention 24
 exit
...
log-id 2
 description "Chassis log file."
 filter 2
 from security
 to file 1
 exit
...

A:ALA-12>config>log#
```

Use the following CLI syntax to delete a log file.

```
config>log
 no log-id log-id
 shutdown
```

#### Example

The following shows an example to delete a log file.

```
config# log
 config>log# log-id 2
 config>log>log-id# shutdown
 config>log>log-id# exit
 config>log# no log-id 2
```

### 5.6.4.3 Modifying a file ID



#### Note:

When the **file-id** location parameter is modified, log files are not written to the new location until a rollover occurs or the log is manually cleared. A rollover can be forced by using the **clear>log** command. Subsequent log entries are then written to the new location. If a rollover does not occur or the log not cleared, the old location remains in effect.

The location can be CF (cflash-id) or USB (usb-flash-id).

Use the following CLI syntax to modify a log file ID:

```
config>log
 file-id log-file-id
 description description-string
```

```
location [cflash-id]
rollover minutes [retention hours]
```

### Example

The following displays the current log configuration.

```
A:ALA-12>config>log# info

file-id 1
description "This is a log file."
location cf1:
rollover 600 retention 24
exit

A:ALA-12>config>log#
```

### Example

The following displays an example to modify log file parameters.

```
config# log
config>log# file-id 1
config>log>file-id# description "LocationTest."
config>log>file-id# rollover 2880 retention 500
config>log>file-id# exit
```

The following displays the file modifications.

```
A:ALA-12>config>log# info

...
file-id 1
description "LocationTest."
location cf1:
rollover 2880 retention 500
exit
...

A:ALA-12>config>log#
```

## 5.6.4.4 Deleting a file ID



### Note:

All references to the file ID must be deleted before the file ID can be removed.

Use the following CLI syntax to delete a file ID:

```
config>log
no file-id log-file-id
```

### Example: Deleting a file ID

```
config>log# no file-id 1
```

### 5.6.4.5 Modifying a syslog ID



**Note:**

All references to the syslog ID must be deleted before the syslog ID can be removed.

Use the following CLI syntax to modify a syslog ID parameters:

```
config>log
 syslog syslog-id
 description description-string
 address ip-address
 log-prefix log-prefix-string
 port port
 level {emergency|alert|critical|error|warning|notice|info|debug}
 facility syslog-facility
```

#### Example: Syslog ID modifications

```
config# log
config>log# syslog 1
config>log>syslog$ description "Test syslog."
config>log>syslog# address 10.10.0.91
config>log>syslog# facility mail
config>log>syslog# level info
```

#### Example: Syslog configuration

```
A:ALA-12>config>log# info

...
 syslog 1
 description "Test syslog."
 address 10.10.10.91
 facility mail
 level info
 exit
...

A:ALA-12>config>log#
```

### 5.6.4.6 Deleting a syslog

Use the following CLI syntax to delete a syslog file:

```
config>log
 no syslog syslog-id
```

#### Example: Deleting a syslog ID

```
config# log
config>log# no syslog 1
```

### 5.6.4.7 Modifying an SNMP trap group

Use the following CLI syntax to modify an SNMP trap group:

```
config>log
 snmp-trap-group log-id
 trap-target name [address ip-address] [port port] [snmpv1|snmpv2c| snmpv3] notify-
community communityName |snmpv3SecurityName [security-level {no-auth-no-privacy|auth-no-
privacy|privacy}]
```

#### Example: Current SNMP trap group configuration

```
A:ALA-12>config>log# info

...
snmp-trap-group 10
trap-target 10.10.10.104:5 "snmpv3" notify-community "communitystring"
exit
...

A:ALA-12>config>log#
```

#### Example: Command usage to modify an SNMP trap group

```
config# log
 config>log# snmp-trap-group 10
 config>log>snmp-trap-group# no trap-target 10.10.10.104:5
 config>log>snmp-trap-group# snmp-trap-group# trap-target 10.10.0.91:1 snmpv2c notify-
community "com1"
```

#### Example: SNMP trap group configuration

```
A:ALA-12>config>log# info

...
 snmp-trap-group 10
 trap-target 10.10.0.91:1 "snmpv2c" notify-community "com1"
 exit
...

A:ALA-12>config>log#
```

### 5.6.4.8 Deleting an SNMP trap group

Use the following CLI syntax to delete a trap target and SNMP trap group:

```
config>log
 no snmp-trap-group log-id
 no trap-target name
```

#### Example: SNMP trap group configuration

```
A:ALA-12>config>log# info

...
```

```
snmp-trap-group 10
 trap-target 10.10.0.91:1 "snmpv2c" notify-community "com1"
exit
...

A:ALA-12>config>log#
```

### Example: Deleting a trap target and an SNMP trap group

```
- config>log# snmp-trap-group 10
- config>log>snmp-trap-group# no trap-target 10.10.0.91:1
- config>log>snmp-trap-group# exit
- config>log# no snmp-trap-group 10
```

## 5.6.4.9 Modifying a log filter

Use the following CLI syntax to modify a log filter:

```
config>log
 filter filter-id
 default-action {drop|forward}
 description description-string
 entry entry-id
 action {drop|forward}
 description description-string
 match
 application {eq|neq} application-id
 number {eq|neq|lt|lte|gt|gte} event-id
 router {eq|neq} router-instance [regex]
 severity {eq|neq|lt|lte|gt|gte} severity-level
 subject {eq|neq} subject [regex]
```

### Example: Current log filter configuration

```
ALA-12>config>log# info
#-----
echo "Log Configuration "
#-----
...
 filter 1
 default-action drop
 description "This is a sample filter."
 entry 1
 action forward
 match
 application eq "mirror"
 severity eq critical
 exit
 exit
 exit
...

ALA-12>config>log#
```

### Example: Log filter modifications

```
config# log
config>log# filter 1
```

```
config>log>filter# description "This allows <n>."
config>log>filter# default-action forward
config>log>filter# entry 1
config>log>filter>entry$ action drop
config>log>filter>entry# match
config>log>filter>entry>match# application eq user
config>log>filter>entry>match# number eq 2001
config>log>filter>entry>match# no severity
config>log>filter>entry>match# exit
```

### Example: Log filter configuration

```
A:ALA-12>config>log>filter# info

...
 filter 1
 description "This allows <n>."
 entry 1
 action drop
 match
 application eq "user"
 number eq 2001
 exit
 exit
 exit
 ...

A:ALA-12>config>log>filter#
```

### 5.6.4.10 Deleting a log filter

Use the following CLI syntax to delete a log filter:

```
config>log
 no filter filter-id
```

### Example: Current log filter configuration

```
A:ALA-12>config>log>filter# info

...
 filter 1
 description "This allows <n>."
 entry 1
 action drop
 match
 application eq "user"
 number eq 2001
 exit
 exit
 exit
 ...

A:ALA-12>config>log>filter#
```

### Example: Command usage to delete a log filter

```
– config>log# no filter 1
```

## 5.6.4.11 Modifying event control parameters

Use the following CLI syntax to modify event control parameters:

```
config>log
 event-control application-id [event-name|event-number] generate[severity-level] [throttle]
 event-control application-id [event-name|event-number] suppress
```

### Example: Current event control configuration

```
A:ALA-12>config>log# info

...
event-control 2014 generate critical
...

A:ALA-12>config>log#
```

### Example: Event control modification

```
config# log
config>log# event-control 2014 suppress
```

### Example: Log filter configuration

```
A:ALA-12>config>log# info

...
 event-control 2014 suppress
...

A:ALA-12>config>log#
```

## 5.6.4.12 Returning to the default event control configuration

The **no** form of the **event-control** command returns modified values back to the default values.

Use the following CLI syntax to modify event control parameters:

```
config>log
 no event-control application [event-name |event-number]
```

### Example: Command usage to return to the default values

```
config# log
config>log# no event-control 2001
config>log# no event-control 2002
```

```
config>log# no event-control 2014

A:ALA-12>config>log# info detail

#-----
echo "Log Configuration"
#-----
 event-control 2001 generate minor
 event-control 2002 generate warning
 event-control 2003 generate warning
 event-control 2004 generate critical
 event-control 2005 generate warning
 event-control 2006 generate warning
 event-control 2007 generate warning
 event-control 2008 generate warning
 event-control 2009 generate warning
 event-control 2010 generate warning
 event-control 2011 generate warning
 event-control 2012 generate warning
 event-control 2013 generate warning
 event-control 2014 generate warning
 event-control 2015 generate critical
 event-control 2016 generate warning
...

A:ALA-12>config>log#
```

## 5.7 Log command reference

### 5.7.1 Command hierarchies

- [Configuration commands](#)
  - [Event control commands](#)
  - [Event handling system commands](#)
  - [Event trigger commands](#)
  - [Accounting policy commands](#)
  - [File ID commands](#)
  - [Event filter commands](#)
  - [Log ID commands](#)
  - [SNMP trap group commands](#)
  - [Syslog commands](#)
- [Show commands](#)
- [Clear commands](#)
- [Tools dump commands](#)



## 5.7.1.1 Configuration commands

### 5.7.1.1.1 Event control commands

```
config
- log
- event-control application-id [event-name | event-number] [generate [severity-level]
[throttle]
- event-control application-id [event-name | event-number] suppress
- no event-control application [event-name | event-number]
- route-preference primary {inband | outband} secondary {inband | outband | none}
- no route-preference
- throttle-rate events [interval seconds]
- no throttle-rate
```

### 5.7.1.1.2 Event handling system commands

```
config
- log
- event-handling
- [no] handler every-handler-name
- action-list
- [no] entry entry-id
- description string
- no description
- min-delay [delay]
- no min-delay
- script-policy script-policy-name [owner owner-name]
- no script-policy
- description string
- no description
- [no] shutdown
```

### 5.7.1.1.3 Event trigger commands

```
config
- log
- event-trigger
- [no] event application-id event-name-id
- description string
- no description
- [no] shutdown
- [no] trigger-entry entry-id
- event-handler event-handler
- no event-handler
- log-filter filter-id
- no log-filter
```

#### 5.7.1.1.4 Accounting policy commands

```
config
- log
- accounting-policy acct-policy-id
- no accounting-policy acct-policy-id
- align
- no align
- collection-interval minutes
- [no] collection-interval
- [no] default
- description description-string
- no description
- [no] log-memory
- record record-name
- no record
- [no] shutdown
- [no] to file log-file-id
```

#### 5.7.1.1.5 File ID commands

```
config
- log
- [no] file-id log-file-id
- description description-string
- no description
- location [cflash-id | usb-flash-id]
- rollover minutes [retention hours]
- no rollover
```

#### 5.7.1.1.6 Event filter commands

```
config
- log
- [no] filter filter-id
- default-action {drop | forward}
- no default-action
- description description-string
- no description
- [no] entry entry-id
- action {drop | forward}
- no action
- description description-string
- no description
- [no] match
- application {eq | neq} application-id
- no application
- number {eq | neq | lt | lte | gt | gte} event-id
- no number
- router {eq | neq} router-instance [regexp]
- no router
- severity {eq | neq | lt | lte | gt | gte} severity-level
- no severity
- subject {eq | neq} subject [regexp]
- no subject
```

### 5.7.1.1.7 Log ID commands

```
config
- log
 - [no] log-id log-id
 - description description-string
 - no description
 - filter filter-id
 - no filter
 - from {[main] [security] [change] [debug-trace]}
 - no from
 - [no] shutdown
 - time-format {local | utc}
 - to console
 - to file log-file-id
 - to memory [size]
 - to session
 - to snmp [size]
 - to syslog syslog-id
```

### 5.7.1.1.8 SNMP trap group commands

```
config
- log
 - [no] snmp-dying-gasp primary trap-target-group-num trap-target-name [secondary {trap-
target-group-num trap-target-name} [tertiary {trap-target-group-num trap-target-name}]]
 - [no] snmp-trap-group log-id
 - description description-string
 - no description
 - trap-target name [address ip-address] [port port] [snmpv1 | snmpv2c | snmpv3]
notify-community communityName | snmpv3SecurityName [security-level {no-auth-no-privacy |
auth-no-privacy | privacy} [replay]]
 - no trap-target name
```

### 5.7.1.1.9 Syslog commands

```
config
- log
 - [no] syslog syslog-id
 - address ip-address
 - no address
 - description description-string
 - no description
 - facility syslog-facility
 - no facility
 - level syslog-level
 - no level
 - log-prefix log-prefix-string
 - no log-prefix
 - port port
 - no port
 - tls-client-profile tls-client-profile
 - no tls-client-profile
```

### 5.7.1.2 Show commands

```
show
- log
 - accounting-policy [acct-policy-id] [access | network]
 - accounting-records
 - applications
 - event-control [application-id [event-name | event-number]]
 - file-id [log-file-id]
 - filter-id [filter-id]
 - log-collector
 - log-id [log-id] [severity severity-level] [application application] [sequence from-
seq [to-seq]] [count count] [router router-instance [expression]] [subject subject [regexp]]
[ascending | descending]
 - snmp-trap-group [log-id]
 - syslog [syslog-id]
```

### 5.7.1.3 Clear commands

```
clear
- log log-id
```

### 5.7.1.4 Tools dump commands

```
tools
- dump
 - accounting-policy [id] flash-write-count [clear]
```



**Note:**

For more information, see the *7210 SAS-D, Dxp, K 2F1C2T, K 2F6C4T, K 3SFP+ 8C OAM and Diagnostics Guide*.

## 5.7.2 Command descriptions

- [Configuration commands](#)
- [Show commands](#)
- [Clear commands](#)

### 5.7.2.1 Configuration commands

- [Generic commands](#)
- [Event control commands](#)
- [Log file commands](#)
- [Log filter commands](#)
- [Log filter entry commands](#)

- [Log filter entry match commands](#)
- [Syslog commands](#)
- [SNMP trap group commands](#)
- [Logging destination commands](#)
- [Accounting policy commands](#)

### 5.7.2.1.1 Generic commands

#### description

##### Syntax

**description** *string*

**no description**

##### Context

config>log

config>log>event-handling>handler

config>log>event-handling>handler>action-list>entry

config>log>event-trigger>event

config>log>filter

config>log>filter>entry

config>log>accounting-policy

config>log>syslog

config>log>snmp-trap-group

##### Platforms

Supported on all 7210 SAS platforms as described in this document

##### Description

This command creates a text description stored in the configuration file for a configuration context. The **description** command associates a text string with a configuration context to help identify the content in the configuration file.

The **no** form of the command removes the string from the configuration.

##### Parameters

***string***

The description can contain a string of up to 80 characters composed of printable, 7-bit ASCII characters. If the string contains special characters (#, \$, spaces, and so on), the entire string must be enclosed within double quotes.

## shutdown

### Syntax

[no] shutdown

### Context

```
config>log
config>log>accounting-policy
config>log>event-handling>handler>action-list>entry
config>log>event-trigger>event
```

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command administratively disables an entity. When disabled, an entity does not change, reset, or remove any configuration settings or statistics. The operational state of the entity is disabled as well as the operational state of any entities contained within. Many objects must be shut down before they may be deleted.

The **no** form of this command administratively enables an entity.

### Default

no shutdown

### Special Cases

#### log-id

When a *log-id* is shut down, no events are collected for the entity. This leads to the loss of event data.

#### accounting-policy

When an accounting policy is shut down, no accounting data is written to the destination log ID. Counters in the billing data reflect totals, not increments, so when the policy is re-enabled (**no shutdown**) the counters include the data collected during the period the policy was shut down.

## 5.7.2.1.2 Event control commands

## event-control

### Syntax

**event-control** *application-id* [**event-name** | *event-number*] [**generate** [*severity-level*] [*throttle*]

**event-control** *application-id* [**event-name** | *event-number*] **suppress**  
**no event-control** *application* [**event-name** | *event-number*]

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies that a particular event or all events associated with an application is either generated or suppressed.

Events are generated by an application and contain an event number and description describing the cause of the event. Each event has a default designation which directs it to be generated or suppressed.

Events are generated with a default severity level that can be modified by using the *severity-level* option.

Events that are suppressed by default are typically used for debugging purposes. Events are suppressed at the time the application requests the event generation. No event log entry is generated regardless of the destination. While this feature can save processor resources, there may be a negative effect on the ability to troubleshoot problems if the logging entries are squelched. In reverse, indiscriminate application may cause excessive overhead.

The rate of event generation can be throttled by using the **throttle** parameter.

The **no** form of the command reverts the parameters to the default setting for events for the application or a specific event within the application. The severity, generate, suppress, and throttle options are also reset to the initial values.

## Default

Each event has a set of default settings. To display a list of all events and the current configuration use the [event-control](#) command.

## Parameters

### ***application-id***

The application whose events are affected by this event control filter.

**Default**    None, this parameter must be explicitly specified.

**Values**    A valid application name. To display a list of valid application names, use the **applications** command. Valid applications are:

### ***event-name* | *event-number***

To generate, suppress, or revert to default for a single event, enter the specific number or event short name. If no event number or name is specified, the command applies to all events in the application. To display a list of all event short names use the [event-control](#) command.

**Default**    none

**Values** A valid event name or event number.

**generate**

Specifies that logger event is created when this event occurs. The generate keyword can be used with two optional parameters, *severity-level* and **throttle**.

**Default** generate

**severity-name**

An ASCII string representing the severity level to associate with the specified generated events

**Default** The system assigned severity name

**Values** One of: cleared, indeterminate, critical, major, minor, warning.

**throttle**

Specifies whether events of this type are throttled. By default, event throttling is on for most event types.

**suppress**

Indicates that the specified events are not logged. If this keyword is not specified, the events are generated by default.

## route-preference

### Syntax

**route-preference primary {inband | outband} secondary {inband | outband | none}**

**no route-preference**

### Context

config>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command specifies the primary and secondary routing preference for traffic generated for SNMP notifications and syslog messages. If the remote destination is not reachable through the routing context specified by primary route preference, the secondary routing preference is attempted.

The **no** form of the command reverts to the default values.

### Default

no route-preference



## Parameters

### primary

Specifies the primary routing preference for traffic generated for SNMP notifications and syslog messages.

**Default** outband

### secondary

Specifies the secondary routing preference for traffic generated for SNMP notifications and syslog messages. The routing context specified by the secondary route preference is attempted if the remote destination was not reachable by the primary routing preference, specified by primary route preference. The value specified for the secondary routing preference must be distinct from the value for primary route preference.

**Default** inband

### inband

Specifies that the logging utility attempts to use the base routing context to send SNMP notifications and syslog messages to remote destinations.

### outband

Specifies that the logging utility attempts to use the management routing context to send SNMP notifications and syslog messages to remote destinations.

### none

Specifies that no attempt is made to send SNMP notifications and syslog messages to remote destinations.

## 5.7.2.1.3 Event handling system commands

### event-handling

#### Syntax

**event-handling**

#### Context

config>log

#### Platforms

7210 SAS-Dxp

#### Description

Commands in this context configure event handling within the Event Handler System (EHS).

## handler

### Syntax

**[no] handler** *event-handler-name*

### Context

config>log>event-handling

### Platforms

7210 SAS-Dxp

### Description

This command configures an EHS handler.

The **no** form of this command removes the specified EHS handler.

### Default

no handler

### Parameters

***event-handler-name***

Specifies the name of the EHS handler, up to 32 characters.

## action-list

### Syntax

**action-list**

### Context

config>log>event-handling>handler

### Platforms

7210 SAS-Dxp

### Description

Commands in this context configure the EHS handler action list.

## entry

### Syntax

**[no] entry** *entry-id*

## Context

config>log>event-handling>handler>action-list

## Platforms

7210 SAS-Dxp

## Description

This command configures an EHS handler action list entry. A handler can have multiple actions where each action, for example, can request the execution of a different script. When the handler is triggered it walks through the list of configured actions.

The **no** form of this command removes the specified EHS handler action list entry.

## Default

no entry

## Parameters

**entry-id**

Specifies the identifier of the EHS handler entry.

**Values** 1 to 1500

## min-delay

## Syntax

**min-delay** [*delay*]

**no min-delay**

## Context

config>log>event-handling>handler>action-list>entry

## Platforms

7210 SAS-Dxp

## Description

This command specifies the minimum delay, in seconds, between subsequent executions of the action specified in this entry. This is useful, for example, to ensure that a script does not get triggered too often.

The **no** form of this command disables the minimum delay.

## Default

no min-delay

**Parameters**

**delay**  
Specifies the minimum delay, in seconds.  
**Values** 1 to 604800

script-policy

**Syntax**

**script-policy** *policy-name* [**owner** *policy-owner*]  
**no script-policy**

**Context**

config>log>event-handling>handler>action-list>entry

**Platforms**

7210 SAS-Dxp

**Description**

This command configures the script policy parameters to use for the EHS handler action list entry. The associated script is launched when the handler is triggered.  
The **no** form of this command disables the script policy parameters.

**Default**

no script-policy

**Parameters**

**policy-name**  
Specifies the script policy name, up to 32 characters.  
**owner** *policy-owner*  
Specifies the script policy owner, up to 32 characters.  
**Default** "TiMOS CLI"

5.7.2.1.4 Event trigger commands

event-trigger

**Syntax**

**event-trigger**

**Context**

config>log

**Platforms**

7210 SAS-Dxp

**Description**

Commands in this context configure log events as triggers for EHS handlers.

event

**Syntax**

[no] event *application-id event-name-id*

**Context**

config>log>event-trigger

**Platforms**

7210 SAS-Dxp

**Description**

This command configures a specific log event as a trigger for one or more EHS handlers. Further matching criteria can be applied to only trigger specific handlers with specific instances of the log event.

The **no** form of this command removes the specified trigger event.

**Default**

no event

**Parameters**

***application-id***  
Specifies the type of application that triggers the event.

**Values** dot1x

***event-name-id***  
Specifies the name or numerical identifier of the event.

**Values** 0 to 4294967295 | event-name: 32 characters max

trigger-entry

**Syntax**

[no] trigger-entry *entry-id*

## Context

config>log>event-trigger>event

## Platforms

7210 SAS-Dxp

## Description

This command configures an instance of a trigger for an EHS handler. A trigger entry binds a set of matching criteria for a log event to a specific handler. If the log event occurs in the system and matches the criteria configured in the associated log filter, the handler is executed.

The **no** form of this command removes the specified trigger entry.

## Default

no trigger-entry

## Parameters

***entry-id***

Specifies the identifier of the EHS event trigger entry.

**Values** 1 to 1500

## event-handler

## Syntax

**event-handler** *event-handler*

**no event-handler**

## Context

config>log>event-trigger>event>trigger-entry

## Platforms

7210 SAS-Dxp

## Description

This command configures the event handler to be used for this trigger entry.

The **no** form of this command removes the event handler to be used for the trigger entry.

## Default

no event-handler

## Parameters

***event-handler***

Specifies the name of the event handler, up to 32 characters.

## log-filter

### Syntax

**log-filter** *filter-id*

**no log-filter**

### Context

config>log>event-trigger>event>trigger-entry

### Platforms

7210 SAS-Dxp

### Description

This command configures the log filter to be used for this trigger entry. The log filter defines the matching criteria that must be met for the log event to trigger the handler execution. The log filter is applied to the log event and, if the filtering decision results in a "forward" action, the handler is triggered.

It is typically unnecessary to configure match criteria for "application" or "number" in the log filter used for the EHS since the specific filter is only applied for a specific log event application and number, as configured under **config>log>event-trigger**.

The **no** form of this command removes the log filter to be used for this trigger entry.

### Default

no log-filter

### Parameters

*filter-id*

Specifies the ID of the filter.

**Values** 1 to 1500

## 5.7.2.1.5 Log file commands

## file-id

### Syntax

[no] **file-id** *file-id*

### Context

config>log

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

Commands in this context configure a file ID template to be used as a destination for an event log or billing file.

This command defines the file location and characteristics that are to be used as the destination for a log event message stream or accounting/billing information. The file defined in this context is subsequently specified in the **to** command under **log-id** or **accounting-policy** to direct specific logging or billing source streams to the file destination.

A file ID can only be assigned to either one **log-id** or one **accounting-policy**. It cannot be reused for multiple instances. A file ID and associated file definition must exist for each log and billing file that must be stored in the file system.

A file is created when the file ID defined in this command is selected as the destination type for a specific log or accounting record. Log files are collected in a "log" directory. Accounting files are collected in an "act" directory.

The filenames for a log are created by the system as summarized in the following table.

Table 57: Log filenames

| File type       | File name                 |
|-----------------|---------------------------|
| Log File        | log <i>lff-timestamp</i>  |
| Accounting File | act <i>aaff-timestamp</i> |

where:

- *ll* is the *log-id*
- *aa* is the accounting *policy-id*
- *ff* is the file-id
- The *timestamp* is the actual timestamp when the file is created. The format for the timestamp is *yyyymmdd-hhmmss* where:

*yyyy* is the year (for example, 2022)

*mm* is the month number (for example, 12 for December)

*dd* is the day of the month (for example, 03 for the 3rd of the month)

*hh* is the hour of the day in 24 hour format (for example, 04 for 4 a.m.)

*mm* is the minutes (for example, 30 for 30 minutes past the hour)

*ss* is the number of seconds (for example, 14 for 14 seconds)

The accounting file is compressed and has a `.gz` extension.

When initialized, each file contains the following:

- the *log-id* description
- the time the file was opened
- the reason the file was created



- if the event log file was closed properly, the sequence number of the last event stored on the log is recorded

If the process of writing to a log file fails (for example, the compact flash card is full) and a backup location is not specified or fails, the log file does not become operational even if the compact flash card is replaced. Enter either a **clear log** command or a **shutdown/no shutdown** command to reinitialize the file.

If the primary location fails (for example, the compact flash card fills up during the write process), a trap is sent and logging continues to the specified backup location. This can result in truncated files in different locations.

The **no** form of this command removes the *file-id* from the configuration. A *file-id* can only be removed from the configuration if the file is not the designated output for a log destination. The actual file remains on the file system.

## Parameters

### *file-id*

The file identification number, expressed as a decimal integer.

**Values** 1 to 99

## location

## Syntax

**location** [*cflash-id* | *usb-flash-id*]

**no location**

## Context

config>log>file *file-id*

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies the primary location where the log or billing file is created.

When creating files, the primary location is used as long as there is available space. If no space is available, an attempt is made to delete unnecessary files that are past their retention date.

If sufficient space is not available, an attempt is made to remove the oldest to newest closed log or accounting files. After each file is deleted, the system attempts to create the new file.

A medium severity trap is issued to indicate that a compact flash is either not available or that no space is available on the specified flash and that the backup location is being used.

A high priority alarm condition is raised if none of the configured compact flash devices for this file ID are present or if there is insufficient space available. If space becomes available, the alarm condition is cleared.

The **no** form of this command reverts to default settings.

## Default

Log files are created on cf1: and accounting files are created on cf1:.

## Parameters

### *cflash-id*

Specifies the primary location.

**Values** cflash-id: cf1: | uf1:

### *usb-flash-id*

Specifies the USB location.



**Note:**

The *usb-flash-id* parameter is applicable only to platforms that support USB port and USB storage devices.

## rollover

## Syntax

**rollover** *minutes* [**retention** *hours*]

**no rollover**

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command configures how often an event or accounting log is rolled over or partitioned into a new file.

An event or accounting log is actually composed of multiple individual files. The system creates a new file for the log based on the **rollover** time, expressed in minutes.

The **retention** option, expressed in hours, allows you to modify the default time to keep the file in the system. The retention time is based on the rollover time of the file.

When multiple **rollover** commands for a *file-id* are entered, the last command overwrites the previous command.

## Default

rollover 1440 retention 12

## Parameters

### *minutes*

Specifies the rollover time, in minutes.

**Values** 5 to 10080

**hours**

Specifies the retention, period in hours, expressed as a decimal integer. The retention time is based on the creation time of the file. The file becomes a candidate for removal when the creation datestamp, rollover time, and retention time added together is less than the current timestamp.

**Default** 12

**Values** 1 to 500

5.7.2.1.6 Log filter commands

filter

Syntax

[no] filter filter-id

Context

config>log

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command configured an event filter. An event filter specifies whether to forward or drop an event or trap based on the match criteria.

Filters are configured in the **filter filter-id** context and applied to a log in the **log-id log-id** context. Only events for the configured log source streams destined for the log ID where the filter is applied are filtered.

Any changes made to an existing filter, using any of the sub-commands, are immediately applied to the destinations where the filter is applied.

The **no** form of the command removes the filter association from log IDs, which causes those logs to forward all events.

Parameters

**filter-id**

Specifies the filter ID.

**Values** 1 to 1001

## default-action

### Syntax

**default-action** {drop | forward}  
**no default-action**

### Context

config>log>filter

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command specifies the action that is applied to events when no action is specified in the event filter entries or when an event does not match the specified criteria. When multiple **default-action** commands are entered, the last command overwrites the previous command.

The **no** form of this command reverts the default action to the default value.

### Default

default-action forward

### Parameters

#### drop

Specifies that the events that are not explicitly forwarded by an event filter match are dropped.

#### forward

Specifies that the events that are not explicitly dropped by an event filter match are forwarded.

## 5.7.2.1.7 Log filter entry commands

## action

### Syntax

**action** {drop | forward}  
**no action**

### Context

config>log>filter>entry

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies a drop or forward action associated with the filter entry. If neither **drop** nor **forward** is specified, the **default-action** is used for traffic that conforms to the match criteria. This could be considered a no-op filter entry used to explicitly exit a set of filter entries without modifying previous actions.

Multiple action statements entered overwrite previous actions.

The **no** form of this command removes the specified **action** statement.

## Default

Action specified by the **default-action** command applies.

## Parameters

### drop

Specifies packets matching the entry criteria are dropped.

### forward

Specifies packets matching the entry criteria are forwarded.

## entry

## Syntax

[no] **entry** *entry-id*

## Context

config>log>filter

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command creates or edits an event filter entry. Multiple entries may be created using unique *entry-id* numbers. The -TIMOS implementation exits the filter on the first match found and executes the action in accordance with the action command.

Comparisons are performed in an ascending entry ID order. When entries are created, they should be arranged sequentially from the most explicit entry to the least explicit. Matching ceases when a packet matches an entry. The entry action is performed on the packet, either drop or forward. To be considered a match, the packet must meet all the conditions defined in the entry.

An entry may not have any match criteria defined (in which case, everything matches) but must have at least the keyword **action** for it to be considered complete. Entries without the **action** keyword are considered incomplete and rendered inactive.

The **no** form of this command removes the specified entry from the event filter. Entries removed from the event filter are immediately removed from all log IDs where the filter is applied.

### Parameters

#### *entry-id*

The entry ID uniquely identifies a set of match criteria corresponding action within a filter. Entry ID values should be configured in staggered increments so you can insert a new entry in an existing policy without renumbering the existing entries.

**Values** 1 to 999

## 5.7.2.1.8 Log filter entry match commands

### match

#### Syntax

[no] match

#### Context

config>log>filter>entry

#### Platforms

Supported on all 7210 SAS platforms as described in this document

#### Description

This command creates or edits match criteria for a filter entry. When the match criteria is satisfied, the action associated with the entry is executed.

If more than one match parameter (within one match statement) is specified, all the criteria must be satisfied (and functional) before the action associated with the match is executed.

Use the [application](#) command to display a list of the valid applications.

Match context can consist of multiple match parameters (application, event-number, severity, subject), but multiple **match** statements cannot be entered per entry.

The **no** form of this command removes the match criteria for the *entry-id*.

### application

#### Syntax

**application** {eq | neq} *application-id*

**no application**

## Context

config>log>filter>entry>match

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command adds a 7210 SAS application as an event filter match criterion.

A 7210 SAS application is the software entity that reports the event. Applications include IP, MPLS, OSPF, CLI, services, and so on. Only one application can be specified. The latest **application** command overwrites the previous command.

The **no** form of the command removes the application as a match criterion.

## Default

no application

## Parameters

**eq | neq**

Specifies the operator specifying the type of match. Valid operators are listed in the following table.

Table 58: Valid operators

| Operator | Notes        |
|----------|--------------|
| eq       | equal to     |
| neq      | not equal to |

***application-id***

Specifies the application name string.

number

## Syntax

**number {eq | neq | lt | lte | gt | gte} event-id**

**no number**

## Context

config>log>filter>entry>match

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command adds an application event number as a match criterion.

The event numbers uniquely identify a specific logging event within an application.

Only one **number** command can be entered per event filter entry. The latest **number** command overwrites the previous command.

The **no** form of the command removes the event number as a match criterion.

## Default

no event-number

## Parameters

**eq | neq | lt | lte | gt | gte**

This operator specifies the type of match. Valid operators are listed in the following table.

Table 59: Valid operators

| Operator | Notes                    |
|----------|--------------------------|
| eq       | equal to                 |
| neq      | not equal to             |
| lt       | less than                |
| lte      | less than or equal to    |
| gt       | greater than             |
| gte      | greater than or equal to |

### **event-id**

Specifies the event ID, expressed as a decimal integer.

**Values** 1 to 4294967295

## router

## Syntax

**router {eq | neq} router-instance [regex]**

**no router**

## Context

config>log>filter>entry>match

## Platforms

Supported on all 7210 SAS platforms as described in this document



## Description

This command specifies the log event matches for the router.

## Parameters

### **eq**

Determines if the matching criteria should be equal to the specified value.

### **neq**

Determines if the matching criteria should not be equal to the specified value.

### **router-instance**

Specifies a router name up to 32 characters to be used in the match criteria.

### **regexp**

Specifies the type of string comparison to use to determine whether the log event matches the value of **router** command parameters. When the **regexp** keyword is specified, the string in the **router** command is a regular expression string that is matched against the subject string in the log event being filtered.

## severity

## Syntax

**severity** {**eq** | **neq** | **lt** | **lte** | **gt** | **gte**} *severity-level*

**no severity**

## Context

config>log>filter>entry>match

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command adds an event severity level as a match criterion. Only one severity command can be entered per event filter entry. The latest severity command overwrites the previous command.

The **no** form of this command removes the severity match criterion.

## Default

no severity

## Parameters

**eq** | **neq** | **lt** | **lte** | **gt** | **gte**

Specifies the type of match. Valid operators are listed in the following table.

Table 60: Valid operators

| Operator | Notes                    |
|----------|--------------------------|
| eq       | equal to                 |
| neq      | not equal to             |
| lt       | less than                |
| lte      | less than or equal to    |
| gt       | greater than             |
| gte      | greater than or equal to |

**severity-level**

Specifies the ITU severity level name. The following table lists severity names and corresponding numbers per ITU standards M.3100 X.733 and X.21 severity levels.

Table 61: Severity levels

| Severity number | Severity name        |
|-----------------|----------------------|
| 1               | cleared              |
| 2               | indeterminate (info) |
| 3               | critical             |
| 4               | major                |
| 5               | minor                |
| 6               | warning              |

**Values** cleared, intermediate, critical, major, minor, warning

## subject

### Syntax

**subject** {eq|neq} *subject* [regex]

**no subject**

### Context

config>log>filter>entry>match

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command adds an event subject as a match criterion.

The subject is the entity for which the event is reported, such as a port. In this case the port-id string would be the subject. Only one **subject** command can be entered per event filter entry. The latest **subject** command overwrites the previous command.

The **no** form of this command removes the subject match criterion.

Default

no subject

Parameters

**eq | neq**

Specifies the type of match. Valid operators are listed in the following table.

Table 62: Valid operators

| Operator | Notes        |
|----------|--------------|
| eq       | equal to     |
| neg      | not equal to |

**subject**

Specifies a string used as the subject match criterion.

**regexp**

Specifies the type of string comparison to use to determine whether the log event matches the value of **subject** command parameters. When the **regexp** keyword is specified, the string in the **subject** command is a regular expression string that is matched against the subject string in the log event being filtered.

When the **regexp** keyword is not specified, the **subject** command string is matched exactly by the event filter.

5.7.2.1.9 Syslog commands

syslog

Syntax

[no] syslog syslog-id

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

Commands in this context configure a syslog target host that is capable of receiving selected syslog messages from this network element.

A valid *syslog-id* must have the target syslog host address configured. A maximum of 10 syslog IDs can be configured.

No log events are sent to a syslog target address until the *syslog-id* has been configured as the log destination (**to**) in the log-id node.

The **no** form of this command removes the syslog configuration.

## Parameters

### *syslog-id*

Specifies the syslog ID number for the syslog destination, expressed as a decimal integer.

**Values** 1 to 10

## address

## Syntax

**address** *ip-address*

**no address**

## Context

config>log>syslog

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command adds the syslog target host IP address to/from a syslog ID.

This parameter is mandatory. If no **address** is configured, syslog data cannot be forwarded to the syslog target host.

Only one address can be associated with a *syslog-id*. If multiple addresses are entered, the last address entered overwrites the previous address.

The same syslog target host can be used by multiple log IDs.

The **no** form of this command removes the syslog target host IP address.

## Default

no address

## Parameters

### *ip-address*

Specifies the IP address of the syslog target host in dotted decimal notation.

**Values**    ipv4-address — a.b.c.d  
              ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)  
                              x:x:x:x:x:d.d.d.d  
              x — [0..FFFF]H  
              d — [0..255]D

## facility

## Syntax

**facility** *syslog-facility*

**no facility**

## Context

config>log>syslog

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command configures the facility code for messages sent to the syslog target host.

Multiple syslog IDs can be created with the same target host, but each syslog ID can only have one facility code. If multiple facility codes are entered, the last facility code entered overwrites the previous facility code.

If multiple facilities need to be generated for a single syslog target host, multiple log ID entries must be created, each with its own filter criteria to select the events to be sent to the syslog target host with a specific facility code.

The **no** form of this command reverts to the default value.

## Default

facility local7

## Parameters

### *syslog-facility*

Specifies the syslog facility name. The syslog facility name represents a specific numeric facility code. The code should be entered in accordance with the syslog RFC. However,

the software does not validate if the facility code configured is appropriate for the event type being sent to the syslog target host.

**Values** kernel, user, mail, systemd, auth, syslogd, printer, netnews, uucp, cron, authpriv, ftp, ntp, logaudit, logalert, cron2, local0, local1, local2, local3, local4, local5, local6, local7

The following table lists valid responses in accordance with RFC 3164, *The BSD syslog Protocol*.

Table 63: Facility codes

| Numerical code | Facility code |
|----------------|---------------|
| 0              | kernel        |
| 1              | user          |
| 2              | mail          |
| 3              | systemd       |
| 4              | auth          |
| 5              | syslogd       |
| 6              | printer       |
| 7              | net-news      |
| 8              | uucp          |
| 9              | cron          |
| 10             | auth-priv     |
| 11             | ftp           |
| 12             | ntp           |
| 13             | log-audit     |
| 14             | log-alert     |
| 15             | cron2         |
| 16             | local0        |
| 17             | local1        |
| 18             | local2        |
| 19             | local3        |
| 20             | local4        |

| Numerical code | Facility code |
|----------------|---------------|
| 21             | local5        |
| 22             | local6        |
| 23             | local7        |

## log-prefix

### Syntax

**log-prefix** *log-prefix-string*

**no log-prefix**

### Context

config>log>syslog

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command adds the string prepended to every syslog message sent to the syslog host.

RFC 3164, *The BSD syslog Protocol*, allows an alphanumeric string (tag) to be prepended to the content of every log message sent to the syslog host. This alphanumeric string can, for example, be used to identify the node that generates the log entry. The software appends a colon (:) and a space to the string and it is inserted in the syslog message after the date stamp and before the syslog message content.

Only one string can be entered. If multiple strings are entered, the last string overwrites the previous string. The alphanumeric string can contain lowercase (a-z), uppercase (A-Z), and numeric (0-9) characters.

The **no** form of this command removes the log prefix string.

### Default

no log-prefix

### Parameters

***log-prefix-string***

Specifies an alphanumeric string, up to 32 characters. Spaces and colons cannot be used in the string.

## level

### Syntax

**level** *syslog-level*

**no level**

## Context

config>log>syslog

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command configures the syslog message severity level threshold. All messages with a severity level equal to or higher than the threshold are sent to the syslog target host. Severity levels are shown in [Table 64: Syslog message severity levels](#).

Only a single threshold level can be specified. If multiple levels are entered, the last **level** entered overwrites the previously entered commands.

The **no** form of this command reverts to the default value.

## Default

level info

## Parameters

### **syslog-level**

Specifies the threshold severity level name.

**Values** emergency, alert, critical, error, warning, notice, info, debug

Table 64: Syslog message severity levels

| Severity level               | Numerical severity (highest to lowest) | Configured severity | Definition                       |
|------------------------------|----------------------------------------|---------------------|----------------------------------|
|                              | 0                                      | emergency           | system is unusable               |
| 3                            | 1                                      | alert               | action must be taken immediately |
| 4                            | 2                                      | critical            | critical condition               |
| 5                            | 3                                      | error               | error condition                  |
| 6                            | 4                                      | warning             | warning condition                |
|                              | 5                                      | notice              | normal but significant condition |
| 1 cleared<br>2 indeterminate | 6                                      | info                | informational messages           |
|                              | 7                                      | debug               | debug-level messages             |



## port

### Syntax

**port** *port*

**no port**

### Context

config>log>syslog

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command configures the UDP port that is used to send syslog messages to the syslog target host.

The port configuration is needed if the syslog target host uses a port other than the standard UDP syslog port 514.

Only one port can be configured. If multiple **port** commands are entered, the last entered port overwrites the previously entered ports.

The **no** form of this command removes the value from the configuration.

### Default

no port

### Parameters

**port**

Specifies the UDP port number to use when sending syslog messages.

**Values** 0 to 65535

## throttle-rate

### Syntax

**throttle-rate** *events* [*interval seconds*]

**no throttle-rate**

### Context

config>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command configures an event throttling rate.

## Parameters

### *events*

Specifies the number of log events that can be logged within the specified interval for a specific event. When the limit is reached, any additional events of that type are dropped, for example, the event drop count is incremented. At the end of the throttle interval, if any events have been dropped, a trap notification is sent.

**Values** 10 to 20000

**Default** 500

### *interval seconds*

Specifies the number of seconds that an event throttling interval lasts.

**Values** 1 to 60

**Default** 1

## tls-client-profile

## Syntax

**tls-client-profile** *tls-client-profile*

**no tls-client-profile**

## Context

config>log>syslog

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the TLS client profile used to encrypt syslog communications for event logs. When configured, syslog log event messages are sent using TLS.

Any change to this command results in a brief interruption of the event log, potentially causing the loss of a few syslog messages.

The **no** form of this command removes TLS encryption of syslog communications and sends syslog messages over UDP.

## Default

no tls-client-profile

## Parameters

### *tls-client-profile*

Specifies the name of a TLS profile configured in the **config>system>security>tls** context, up to 32 characters in length.

## 5.7.2.1.10 SNMP trap group commands

### snmp-trap-group

## Syntax

[no] **snmp-trap-group** *log-id*

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

Commands in this context configure a group of SNMP trap receivers and their operational parameters for a specific *log-id*.

A group specifies the types of SNMP traps and the log ID that will receive the group of SNMP traps. A trap group must be configured for SNMP traps to be sent.

To suppress the generation of all alarms and traps, see the [event-control](#) command. To suppress alarms and traps that are sent to this log-id, see the [filter](#) command. When alarms and traps are generated, they can be directed to one or more SNMP trap groups. Logger events that can be forwarded as SNMP traps are always defined on the main event source.

The **no** form of this command deletes the SNMP trap group.

## Parameters

### *log-id*

Specifies the log ID value of a log configured in the [log-id](#) context. Alarms and traps cannot be sent to the trap receivers until a valid *log-id* exists.

**Values** 1 to 100

### snmp-dying-gasp

## Syntax

**snmp-dying-gasp primary** *trap-target-group-num trap-target-name* [**secondary** {*trap-target-group-num trap-target-name*} [**tertiary** {*trap-target-group-num trap-target-name*}]]

## no snmp-dying-gasp

### Context

config>log

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-Dxp 16p and 7210 SAS-Dxp 24p

### Description

This command notifies the SNMP trap server about node power failure. On power failure, the system sends dying gasp traps to the configured SNMP trap servers. Up to three SNMP trap servers can be configured to receive the trap. The traps are sent in the following order:

1. primary SNMP trap receiver
2. Secondary SNMP trap receiver
3. tertiary SNMP trap receiver

When this command is enabled, the node does not generate EFM OAM dying gasp message even if EFM OAM is enabled. That is, generation of an SNMP dying gasp trap is mutually exclusive to the use of an EFM OAM dying gasp message.

By default, the system generates an EFM OAM dying gasp message to remain compatible with earlier versions of the software releases. The user must explicitly configure the system to send out an SNMP trap on loss of power to the node using this command.

Typically, SNMP traps are generated only if the user configures a log to direct the system log events to SNMP. For an SNMP dying gasp trap, it is not required to do so. The DSCP value used by a SNMP dying gasp packet is AF (Assured Forwarding class, value 22).



#### Note:

- The system IP address must be configured. The node uses this address to generate dying gasp traps. If it is not configured, SNMP dying gasp traps are not generated.
- When sending out SNMP dying gasp traps, one of the available routes in either the management routing instance or the base routing instance is used to resolve the next-hop gateway IP address to reach the trap-server destinations configured under primary, secondary, and tertiary trap targets. The route to the destination is always searched first in the management routing instance and if not found, the routes in the base routing instance is looked up. Configuration of route preference does not change this behavior (that is, the order of route lookup does not change).

The **no** form of this command disables generation of SNMP trap messages. It enables generation of EFM OAM dying gasp on access-uplink ports, if EFM OAM is enabled on those ports. The generation of SNMP dying gasp traps is disabled by default.

### Default

no snmp-dying-gasp

## Parameters

### **primary *trap-target-group-num* *trap-target-name***

Specifies the primary SNMP trap receiver to which the system addresses the SNMP trap. The *trap-target-group-num* must correspond to one of the SNMP trap groups configured in the **config>log>snmp-trap-group *trap-num*** command. The *trap-target-name* must correspond to one of the SNMP trap receiver targets configured under **config>log>snmp-trap-group *trap-num* trap-target *target-name***.

### **secondary *trap-target-group-num* *trap-target-name***

Specifies the secondary SNMP trap receiver to which the system addresses the SNMP trap. The *trap-target-group-num* must correspond to one of the SNMP trap groups configured under **config>log>snmp-trap-group *trap-num***. The *trap-target-name* must correspond to one of the SNMP trap receiver target configured under **config>log>snmp-trap-group *trap-num* trap-target *target-name***.

### **tertiary *trap-target-group-num* *trap-target-name***

Specifies the tertiary SNMP trap receiver to which the system addresses the SNMP trap. The *trap-target-group-num* must correspond to one of the SNMP trap group configuration under **config>log>snmp-trap-group *trap-num***. The *trap-target-name* must correspond to one of the SNMP trap receiver target configured under **config>log>snmp-trap-group *trap-num* trap-target *target-name***.

### ***trap-target-group-num***

Specifies the trap target group number, expressed as a decimal integer.

**Values** 1 to 100

### ***trap-target-name***

Specifies the trap target name, up to 28 characters.

## trap-target

## Syntax

**trap-target *name* [*address ip-address*] [*port port*] [*snmpv1* | *snmpv2c* | *snmpv3*] *notify-community communityName* | *snmpv3SecurityName* [*security-level* {*no-auth-no-privacy* | *auth-no-privacy* | *privacy*}] [*replay*]**

**no trap-target *name***

## Context

config>log>snmp-trap-group

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command adds or modifies a trap receiver and configures the operational parameters for the trap receiver. A trap reports significant events that occur on a network device such as errors or failures.

Before an SNMP trap can be issued to a trap receiver, the [log-id](#), [snmp-trap-group](#), and at least one [trap-target](#) must be configured.

The [trap-target](#) command is used to add or remove a trap receiver from an [snmp-trap-group](#). The operational parameters specified in the command include the following:

- IP address of the trap receiver
- UDP port used to send the SNMP trap
- SNMP version
- SNMP community name for SNMPv1 and SNMPv2c receivers
- security name and level for SNMPv3 trap receivers

A single **snmp-trap-group** *log-id* can have multiple trap receivers. Each trap receiver can have different operational parameters.

An address can be configured as a trap receiver more than once, as long as a different port is used for each instance.

To prevent resource limitations, only configure a maximum of 10 trap receivers.



**Note:**

If the same **trap-target** *name* **port** *port* parameter value is specified in more than one SNMP trap group, each trap destination should be configured with a different *notify-community* value. This allows a trap receiving an application, such as NMS, to reconcile a separate event sequence number stream for each 7210 SAS event log when multiple event logs are directed to the same IP address and port destination.

The **no** form of this command removes the SNMP trap receiver from the SNMP trap group.

## Parameters

### ***name***

Specifies the name of the trap target up to 28 characters.

### ***address ip-address***

Specifies the IP address of the trap receiver in dotted decimal notation. Only one IP address destination can be specified per trap destination group.

**Values**    ipv4-address — a.b.c.d (host bits must be 0)  
              ipv6-address — x:x:x:x:x:x:x (eight 16-bit pieces)  
                              x:x:x:x:x:d.d.d.d  
                              x — [0..FFFF]H  
                              d — [0..255]D

### ***port***

Specifies the destination UDP port used to send traps to the destination, expressed as a decimal integer. Only one port can be specified per **trap-target** statement. If multiple traps must be issued to the same address, multiple ports must be configured.

**Default**    162

**Values**    1 to 65535

### **snmpv1 | snmpv2c | snmpv3**

Specifies the SNMP version format to use for traps sent to the trap receiver.

The keyword **snmpv1** selects the SNMP version 1 format. When specifying **snmpv1**, the **notify-community** must be configured for the correct SNMP community string that the trap receiver expects to be present in alarms and traps messages. If the SNMP version is changed from **snmpv3** to **snmpv1**, the **notify-community** parameter must be changed to reflect the community string instead of the *security-name* that is used by **snmpv3**.

The keyword **snmpv2c** selects the SNMP version 2c format. When specifying **snmpv2c**, the **notify-community** must be configured for the correct SNMP community string that the trap receiver expects to be present in alarms and traps messages. If the SNMP version is changed from **snmpv3** to **snmpv2c**, the **notify-community** parameter must be changed to reflect the community string instead of the *security-name* that is used by **snmpv3**.

The keyword **snmpv3** selects the SNMP version 3 format. When specifying **snmpv3**, the **notify-community** must be configured for the SNMP *security-name*. If the SNMP version is changed from **snmpv1** or **snmpv2c** to **snmpv3**, the **notify-community** parameter must be changed to reflect the *security-name* instead of the community string used by **snmpv1** or **snmpv2c**.

The following pre-existing conditions are checked before the `snmpv3SecurityName` is accepted.

- The username must be configured.
- The v3 access group must be configured.
- The v3 notification view must be configured.

**Default**    `snmpv3`

**Values**    `snmpv1, snmpv2c, snmpv3`

### **notify-community *community* | *security-name***

Specifies the community string for the **snmpv1**, **snmpv2c**, or **snmpv3** *security-name*. If no **notify-community** is configured, no alarms nor traps are issued for the trap destination. If the SNMP version is modified, the **notify-community** must be changed to the correct form for the SNMP version.

#### ***community***

Specifies the community string as required by the **snmpv1** or **snmpv2c** trap receiver. The community string can be an ASCII string up to 31 characters in length.

#### ***security-name***

Specifies the *security-name* as defined in the `config>system>security>user` context for SNMPv3. The *security-name* can be an ASCII string up to 31 characters.

### **security-level {no-auth-no-privacy | auth-no-privacy | privacy}**

Specifies the required authentication and privacy levels required to access the views configured on this node when configuring an **snmpv3** trap receiver.

The keyword **no-auth-no-privacy** specifies that no authentication and no privacy (encryption) are required.

The keyword **auth-no-privacy** specifies that authentication is required, but no privacy (encryption) is required. When this option is configured the *security-name* must be configured for **authentication**.

The keyword **privacy** specifies that both authentication and privacy (encryption) is required. When this option is configured the *security-name* must be configured for **authentication** and **privacy**.

**Default** no-auth-no-privacy. This parameter can only be configured if SNMPv3 is also configured.

**Values** no-auth-no-privacy, auth-no-privacy, privacy

### replay

Enables replay of missed events to target. If replay is applied to an SNMP trap target address, the address is monitored for reachability. Reachability is determined by whether there is a route in the routing table by which the target address can be reached. Before sending a trap to a target address, the SNMP module asks the PIP module if there is either an in-band or out-of-band route to the target address.

If there is no route to the SNMP target address, the SNMP module saves the sequence ID of the first event that is missed by the trap target. When the routing table changes again so that there is now a route by which the SNMP target address can be reached, the SNMP module replays (for example, retransmits) all events generated to the SNMP notification log while the target address was removed from the route table.



**Note:**

The route table changes the convergence time so it is possible that one or more events may be lost at the beginning or end of a replay sequence.

## 5.7.2.1.11 Logging destination commands

### filter

#### Syntax

**filter** *filter-id*

**no filter**

#### Context

config>log

#### Platforms

Supported on all 7210 SAS platforms as described in this document

#### Description

This command adds an event filter policy with the log destination.



This command is optional. If no event filter is configured, all events, alarms, and traps generated by the source stream are forwarded to the destination.

An event filter policy defines (limits) the events that are forwarded to the destination configured in the log ID. The event filter policy can also be used to select the alarms and traps to be forwarded to a destination **snmp-trap-group**.

The application of filters for debug messages is limited to application and subject only.

Accounting records cannot be filtered using the **filter** command.

Only one *filter-id* can be configured per log destination.

The **no** form of the command removes the specified event filter from the *log-id*.

## Default

no filter

## Parameters

### *filter-id*

Specifies the filter with which to associate the *log-id* configuration. The event filter policy ID must already be defined in **config>log>filter** *filter-id*.

**Values** 1 to 1001

from

## Syntax

**from** {[main] [security] [change] [debug-trace]}

**no from**

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies the source stream to be sent to a log destination.

One or more source streams must be specified. The source of the data stream must be identified using the **from** command before you can configure the destination using the **to** command. The **from** command can identify multiple source streams in a single statement (for example, **from main change debug-trace**).

Only one **from** command may be entered for a single *log-id*. If multiple **from** commands are configured, the last command entered overwrites the previous **from** command.

The **no** form of this command removes all previously configured source streams.

## Parameters

### *main*

Instructs all events in the main event stream to be sent to the destination defined in the **to** command for this destination *log-id*. The main event stream contains the events that are not explicitly directed to any other event stream. To limit the events forwarded to the destination, configure filters using the [filter](#) command.

### *security*

Instructs all events in the security event stream to be sent to the destination defined in the **to** command for this destination *log-id*. The security stream contains all events that affect attempts to breach system security such as failed login attempts, attempts to access MIB tables to which the user is not granted access or attempts to enter a branch of the CLI to which access has not been granted. To limit the events forwarded to the destination, configure filters using the [filter](#) command.

### *change*

Instructs all events in the user activity stream to be sent to the destination configured in the **to** command for this destination *log-id*. The change event stream contains all events that directly affect the configuration or operation of this node. To limit the events forwarded to the change stream destination, configure filters using the [filter](#) command.

### *debug-trace*

Instructs all debug-trace messages in the debug stream to be sent to the destination configured in the **to** command for this destination *log-id*. Filters applied to debug messages are limited to application and subject.

## log-id

## Syntax

[no] **log-id** *log-id*

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

Commands in this context configure destinations for event streams.

The **log-id** context is used to direct events, alarms and traps, and debug information to respective destinations.

A maximum of 10 logs can be configured.

Before an event can be associated with this *log-id*, the **from** command identifying the source of the event must be configured.

Only one destination can be specified for a *log-id*. The destination of an event stream can be an in-memory buffer, console, session, snmp-trap-group, syslog, or file.

Use the **event-control** command to suppress the generation of events, alarms, and traps for all log destinations.

An event filter policy can be applied in the log-id context to limit which events, alarms, and traps are sent to the specified log-id.

Log IDs 99 and 100 are created by the agent. Log ID 99 captures all log messages. Log ID 100 captures log messages with a severity level of major and above.



**Note:**

Log ID 99 provides valuable information for the admin-tech file. Removing or changing the log configuration may hinder debugging capabilities. It is strongly recommended not to alter the configuration for log ID 99.

The **no** form of this command deletes the log destination ID from the configuration.

## Parameters

### *log-id*

Specifies the log ID number, expressed as a decimal integer.

**Values** 1 to 100

## to console

## Syntax

**to console**

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies a log ID destination. This parameter is mandatory when configuring a log destination. This command instructs the events selected for the log ID to be directed to the console. If the console is not connected, all entries are dropped.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

## to file

## Syntax

**to file** *log-file-id*

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies a log ID destination. This parameter is mandatory when configuring a log destination. This command instructs the events selected for the log ID to be directed to a specified file.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

## Parameters

### *log-file-id*

Instructs the events selected for the log ID to be directed to the *log-file-id*. The characteristics of the *log-file-id* referenced here must have already been defined in the **config>log>file** *log-file-id* context.

**Values** 1 to 99

## to memory

## Syntax

**to memory** [*size*]

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies a log ID destination. This parameter is mandatory when configuring a log destination. This command instructs the events selected for the log ID to be directed to a memory log. A memory file is a circular buffer. When the file is full, each new entry replaces the oldest entry in the log.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

## Parameters

### *size*

Specifies the number of events that can be stored in the memory.

**Default** 100

**Values** 50 to 1024

## to session

## Syntax

**to session**

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies a log ID destination and is mandatory when configuring a log destination. This command instructs the events selected for the log ID to be directed to the current console or Telnet session. This command is only valid for the duration of the session. When the session is terminated the log ID is removed. A log ID with a *session* destination is not saved in the configuration file.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

## to snmp

## Syntax

**to snmp** [*size*]

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command specifies the log ID destination. This parameter is mandatory when configuring a log destination. This command instructs the alarms and traps to be directed to the **snmp-trap-group** associated with *log-id*.

A local circular memory log is always maintained for SNMP notifications sent to the specified snmp-trap-group for the *log-id*.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

Parameters

|                |                                                           |
|----------------|-----------------------------------------------------------|
| <b>size</b>    | Specifies the number of events stored in this memory log. |
| <b>Default</b> | 100                                                       |
| <b>Values</b>  | 50 to 1024                                                |

to syslog

Syntax

to syslog *syslog-id*

Context

config>log

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command also specifies the log ID destination. This parameter is mandatory when configuring a log destination.

This command instructs the alarms and traps to be directed to a specified syslog. To remain consistent with the standards governing syslog, messages to syslog are truncated to 1k bytes.

The source of the data stream must be specified in the **from** command before configuring the destination with the **to** command.

The **to** command cannot be modified or re-entered. If the destination or maximum size of an SNMP or memory log needs to be modified, the log ID must be removed and then re-created.

## Parameters

*syslog-id*

Instructs the events selected for the log ID to be directed to the *syslog-id*. The characteristics of the *syslog-id* referenced here must have been defined in the **config>log>syslog** *syslog-id* context.

**Values** 1 to 10

## time-format

### Syntax

**time-format** {**local** | **utc**}

### Context

config>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command specifies whether the time should be displayed in the local or Coordinated Universal Time (UTC) format.

### Default

time-format utc

### Parameters

**local**

Specifies that timestamps are written in the system's local time.

**utc**

Specifies that timestamps are written using the UTC value. This was formerly called Greenwich Mean Time (GMT) and Zulu time.

## 5.7.2.1.12 Accounting policy commands

## accounting-policy

### Syntax

**accounting-policy** *policy-id*

**no accounting-policy** *policy-id*

## Context

config>log

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command enables an access or network accounting policy. An accounting policy defines the accounting records that are created.

Access accounting policies are policies that can be applied to one or more SAPs or access ports.

Changes made to an existing policy, using any of the sub-commands, are applied immediately to all SAPs or access ports where this policy is applied.

If an accounting policy is not specified on a SAP or an access port, accounting records are produced in accordance with the access policy designated as the default. If a default access policy is not specified, no accounting records are collected other than the records for the accounting policies that are explicitly configured.

Network accounting policies can be applied to one or more network ports. Any changes made to an existing policy, using any of the subcommands, are immediately applied to all network ports where this policy is applied.

If no accounting policy is defined on a network port, accounting records are produced in accordance with the default network policy as designated with the default command. If no network default policy is created, no accounting records are collected other than the records for the accounting policies explicitly configured.

A total of 16 accounting records are available on the 7210 SAS-D. A total of 17 accounting records are available on the 7210 SAS-Dxp.

There are three types of accounting policies:

- access
- access port
- network

When creating accounting policies, one access, access port, and network accounting policy can be defined as default. If statistics collection is enabled on an accounting object, and no accounting policy is applied, the respective default accounting policy is used. If no default policy is defined, no statistics are collected unless a specifically defined accounting policy is applied.

The **no** form of this command deletes the policy from the configuration. The accounting policy cannot be removed unless it is removed from all the SAPs, network ports, or channels where the policy is applied.

## Parameters

### *policy-id*

Specifies the policy ID that uniquely identifies the accounting policy, expressed as a decimal integer.

**Values** 1 to 99



## align

### Syntax

**align**

**no align**

### Context

config>log>accounting-policy

### Platforms

7210 SAS-Dxp

### Description

This command aligns statistics collection to the nearest interval within an hour. Enabling this alignment allows statistics to be collected in an accounting file that is synchronized across multiple network nodes in the network.

The **no** form of this command disables the alignment of statistics collection.

### Default

no align

## collection-interval

### Syntax

**collection-interval** *minutes*

**no collection-interval**

### Context

config>log>accounting-policy

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command configures the accounting collection interval.

### Parameters

***minutes***

Specifies the interval between collections, in minutes.

**Values** 5 to 120

A range of 1 to 4 is only allowed when the record type is set to SAA.

## default

### Syntax

[no] default

### Context

config>log>accounting-policy

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command configures the default accounting policy to be used with all SAPs that do not have an accounting policy.

If no accounting policy is defined on an access or network object, accounting records are produced in accordance with the default access policy. If no default access policy is created, then no accounting records are collected other than the records for the accounting policies that are explicitly configured.

When creating accounting policies, one access, one access port, and one network accounting policy can be defined as default.

The record name must be specified before assigning an accounting policy as default.

If a policy is configured as the default policy, a **no default** command must be issued before a new default policy can be configured.

The **no** form of this command removes the default policy designation from the policy ID. The accounting policy is removed from all access or network object ports that do not have this policy explicitly defined.

## record

### Syntax

[no] record *record-name*

### Context

config>log>accounting-policy

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command adds the accounting record type to the accounting policy to be forwarded to the configured accounting file. A record name can only be used in one accounting policy. To obtain a list of all record types that can be configured, use the **show log accounting-records** command.

The following is an output sample for the 7210 SAS-D and 7210 SAS-Dxp.

```
A:7210-SAS>show>log# accounting-records
```

```
=====
Accounting Policy Records
=====
Record # Record Name Def. Interval

1 service-ingress-octets 5
2 service-egress-octets 5
3 service-ingress-packets 5
4 service-egress-packets 5
5 network-ingress-octets 15
6 network-egress-octets 15
7 network-ingress-packets 15
8 network-egress-packets 15
10 combined-service-ingress 5
11 combined-network-ing-egr-octets 15
13 complete-service-ingress-egress 5
32 saa 5
36 access-egress-packets 5
37 access-egress-octets 5
38 combined-access-egress 5
39 combined-network-egress 15
40 combined-service-egress 5
=====
A:7210-SAS>show>log#
```

The following is an output sample for 7210 SAS-K 2F1C2T, 7210 SAS-K 2F6C4T, or 7210 SAS-K 3SFP+ 8C.

```
*A:7210SASk>show>log# accounting-records
```

```
=====
Accounting Policy Records
=====
Record # Record Name Def. Interval

1 service-ingress-octets 5
2 service-egress-octets 5
3 service-ingress-packets 5
4 service-egress-packets 5
5 network-ingress-octets 15
6 network-egress-octets 15
7 network-ingress-packets 15
8 network-egress-packets 15
10 combined-service-ingress 5
11 combined-network-ing-egr-octets 15
13 complete-service-ingress-egress 5
32 saa 5
58 combined-network-egress 15
59 combined-service-egress 5
=====
*A:7210SASk>show>log#
```

To configure an accounting policy for access SAPs, select a service record (for example, service-ingress-octets). To change the record name to another service record, enter the record command with the new record name and it replaces the old record name.

To configure an accounting policy for access ports, select access port type records such as access-egress packets. When changing the record name to another access port record, the record command with the new record name can be entered, and it replaces the old record name.

When configuring an accounting policy for network ports, a network record should be selected. When changing the record name to another network record, the record command with the new record name can be entered and it replaces the old record name.

If the change required modifies the record from one type to another, the old record name must be removed using the **no** form of this command.

Only one record may be configured in a single accounting policy. For example, if an accounting-policy is configured with an **access-egress-packets** record, to change it to **service-ingress-octets**, use the **no record** command under the accounting-policy to remove the old record and enter the **service-ingress-octets** record.



**Note:**

Collecting excessive statistics can adversely affect the CPU utilization and take up large amounts of storage space

The **no** form of this command removes the record type from the policy.

## Parameters

***record-name***

Specifies the accounting record name.

to

## Syntax

**to file** *file-id*

## Context

config>log>accounting-policy

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command specifies the destination for the accounting records selected for the accounting policy.

## Parameters

***file-id***

This option specifies the destination for the accounting records selected for this destination. The characteristics of the *file-id* must have already been defined in the **config>log>file** context. A *file-id* can be used only once.

The file is generated when the file policy is referenced. This command identifies the type of accounting file to be created. The file definition defines its characteristics.

If the **to** command is executed while the accounting policy is in operation, it becomes active during the next collection interval.

**Values** 1 to 99

## log-memory

### Syntax

**log-memory**

**[no] log-memory**

### Context

config>log>accounting-policy

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command enables the system to allocate some RAM (that is, volatile memory) as a temporary storage to write accounting records every collection-interval. The accounting records are moved from the temporary storage to the accounting file on non-volatile memory (that is, flash), when either the rollover-interval expires or the temporary storage location gets full.



**Note:**

The accounting records held in the temporary storage is lost on a reboot (either as a result of loss of power or as a result of user action).

## 5.7.2.2 Show commands

## accounting-policy

### Syntax

**accounting-policy** [*acct-policy-id*] [**access** | **network**]

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command displays accounting policy information.

## Parameters

### *policy-id*

Displays the policy ID that uniquely identifies the accounting policy, expressed as a decimal integer.

**Values** 1 to 99

### **access**

Displays only access accounting policies.

### **network**

Displays only network accounting policies.

## Output

The following output is an example of accounting policy information, and [Table 65: Output fields: accounting policy](#) describes the output fields.

### Sample output

```
A:ALA-1# show log accounting-policy
=====
Accounting Policies
=====
Policy Type Def Admin Oper Intvl File Record Name
Id State State Id

1 network No Up Up 15 1 network-ingress-packets
2 network Yes Up Up 15 2 network-ingress-octets
=====

A:ALA-1#

A:ALA-1# show log accounting-policy 10
=====
Accounting Policies
=====
Policy Type Def Admin Oper Intvl File Record Name
Id State State Id

10 access Yes Up Up 5 3 service-ingress-octets

Description : (Not Specified)

This policy is applied to:
 Svc Id: 100 SAP : 1/1/8:0 Collect-Stats
 Svc Id: 101 SAP : 1/1/8:1 Collect-Stats
 Svc Id: 102 SAP : 1/1/8:2 Collect-Stats
 Svc Id: 103 SAP : 1/1/8:3 Collect-Stats
 Svc Id: 104 SAP : 1/1/8:4 Collect-Stats
 Svc Id: 105 SAP : 1/1/8:5 Collect-Stats
 Svc Id: 106 SAP : 1/1/8:6 Collect-Stats
 Svc Id: 107 SAP : 1/1/8:7 Collect-Stats
 Svc Id: 108 SAP : 1/1/8:8 Collect-Stats
 Svc Id: 109 SAP : 1/1/8:9 Collect-Stats
 ...
=====

A:ALA-1#

A:ALA-1# show log accounting-policy network
=====
```

```
Accounting Policies
=====
Policy Type Def Admin Oper Intvl File Record Name
Id State State Id

1 network No Up Up 15 1 network-ingress-packets
2 network Yes Up Up 15 2 network-ingress-octets
=====
A:ALA-1#

A:ALA-1# show log accounting-policy access
=====
Accounting Policies
=====
Policy Type Def Admin Oper Intvl File Record Name
Id State State Id

10 access Yes Up Up 5 3 service-ingress-octets
=====
A:ALA-1#
```

Table 65: Output fields: accounting policy

| Label       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Policy ID   | Displays the identifying value assigned to a specific policy                                                                                                                                                                                                                                                                                                                                                                                              |
| Type        | Identifies the accounting record type forwarded to the configured accounting file<br><br>access — Indicates that the policy is an access accounting policy<br><br>network — Indicates that the policy is a network accounting policy<br><br>access port — Indicates that the policy is an access port accounting policy which can be used to collect accounting records only for access ports<br><br>none — Indicates no accounting record types assigned |
| Def         | Yes — Indicates that the policy is a default access or network policy<br><br>No — Indicates that the policy is not a default access or network policy                                                                                                                                                                                                                                                                                                     |
| Admin State | Displays the administrative state of the policy<br><br>Up — Indicates that the policy is administratively enabled<br><br>Down — Indicates that the policy is administratively disabled                                                                                                                                                                                                                                                                    |
| Oper State  | Displays the operational state of the policy<br><br>Up — Indicates that the policy is operationally up<br><br>Down — Indicates that the policy is operationally down                                                                                                                                                                                                                                                                                      |

| Label                     | Description                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Intvl                     | Displays the interval, in minutes, in which statistics are collected and written to their destination<br>The default depends on the record name type                          |
| File ID                   | Displays the log destination                                                                                                                                                  |
| Record Name               | Displays the accounting record name, which represents the configured record type                                                                                              |
| Log-Memory                | Yes — Indicates that temporary volatile memory is in use for this accounting policy<br>No — Indicates that temporary volatile memory is not in use for this accounting policy |
| Log-Memory Size           | Displays the amount of temporary volatile memory in use for this accounting policy                                                                                            |
| This policy is applied to | Specifies the entity where the accounting policy is applied                                                                                                                   |

## accounting-records

### Syntax

**accounting-records**

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command displays accounting policy record names.

### Output

The following outputs are examples of accounting record information, and [Table 66: Output fields: accounting records](#) describes the output fields.

#### Sample output for 7210 SAS-D and 7210 SAS-Dxp

```
A:7210-SAS>show>log# accounting-records
```

```
=====
Accounting Policy Records
=====
```

```
Record # Record Name Def. Interval

```



```
1 service-ingress-octets 5
2 service-egress-octets 5
3 service-ingress-packets 5
4 service-egress-packets 5
5 network-ingress-octets 15
6 network-egress-octets 15
7 network-ingress-packets 15
8 network-egress-packets 15
10 combined-service-ingress 5
11 combined-network-ing-egr-octets 15
13 complete-service-ingress-egress 5
32 saa 5
36 access-egress-packets 5
37 access-egress-octets 5
38 combined-access-egress 5
39 combined-network-egress 15
40 combined-service-egress 5
=====
A: 7210- SAS>show>log#
```

Table 66: Output fields: accounting records

| Label         | Description                                                                                                   |
|---------------|---------------------------------------------------------------------------------------------------------------|
| Record #      | Displays the record ID that uniquely identifies the accounting policy, expressed as a decimal integer         |
| Record Name   | Displays the accounting record name                                                                           |
| Def. Interval | Displays the default interval, in minutes, in which statistics are collected and written to their destination |

## applications

**Syntax**  
applications

**Context**  
show>log

**Platforms**  
Supported on all 7210 SAS platforms as described in this document

**Description**  
This command displays a list of all application names that can be used in event-control and filter commands.

**Output**  
The following output is an example of log application name information.

## Sample output

```
A:ALA-1# show log applications
=====
Log Event Application Names
=====
Application Name

CCAG
CHASSIS
CPMHWFILTER
DHCP
DEBUG
DOT1X
FILTER
IGMP
IGMP_SNOOPING
IP
ISIS
LAG
LDP
LOGGER
MIRROR
MPLS
OAM
OSPF
PORT
PPP
QOS
RIP
ROUTE_POLICY
RSVP
SECURITY
SNMP
STP
SVCNMR
SYSTEM
USER
VRRP
VRTR
=====
A:ALA-1#
```

## event-control

### Syntax

**event-control** [*application-id* [*event-name* | *event-number*]]

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command displays event control settings for events including whether the event is suppressed or generated and the severity level for the event.

If no options are specified all events, alarms and traps are listed.

## Parameters

### *application-id*

Only displays event control for the specified application.

**Default** all applications

### *event-name*

Only displays event control for the named application event, up to 32 characters.

**Default** all events for the application

### *event-number*

Only displays event control for the specified application event number.

**Default** all events for the application

**Values** 0 to 4294967295

## Output

The following output is an example of event control settings information, and [Table 67: Output fields: event control](#) describes the output fields.

### Sample output

```
A:ALA-1# show log event-control ospf
=====
Log Events
=====
Application
ID# Event Name P g/s Logged Dropped

2001 ospfVirtIfStateChange WA gen 0 0
2002 ospfNbrStateChange WA gen 1 0
2003 ospfVirtNbrStateChange WA gen 0 0
2004 ospfIfConfigError WA gen 0 0
2005 ospfVirtIfConfigError WA gen 0 0
2006 ospfIfAuthFailure WA gen 0 0
2007 ospfVirtIfAuthFailure WA gen 0 0
2008 ospfIfRxBadPacket WA gen 0 0
2009 ospfVirtIfRxBadPacket WA gen 0 0
2010 ospfTxRetransmit WA sup 0 0
2011 ospfVirtIfTxRetransmit WA sup 0 0
2012 ospfOriginateLsa WA sup 0 404
2013 ospfMaxAgeLsa WA gen 3 0
2014 ospfLsdbOverflow WA gen 0 0
2015 ospfLsdbApproachingOverflow WA gen 0 0
2016 ospfIfStateChange WA gen 2 0
2017 ospfNssaTranslatorStatusChange WA gen 0 0
2018 vRtrOspfSpfRunsStopped WA gen 0 0
2019 vRtrOspfSpfRunsRestarted WA gen 0 0
2020 vRtrOspfOverloadEntered WA gen 1 0
```

```

2021 vRtr0spf0verloadExited WA gen 0 0
2022 ospfRestartStatusChange WA gen 0 0
2023 ospfNbrRestartHelperStatusChange WA gen 0 0
2024 ospfVirtNbrRestartHelperStsChg WA gen 0 0
=====
A:ALA-1#

A:ALA-1# show log event-control ospf ospfVirtIfStateChange
=====
Log Events
=====
Application
ID# Event Name P g/s Logged Dropped

2001 ospfVirtIfStateChange WA gen 0 0
=====
A:ALA-1#

```

Table 67: Output fields: event control

| Label       | Description                                                                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application | Displays the application name                                                                                                                                                                                                                                                                     |
| ID#         | Displays the event ID number within the application<br>L ID#<br>An "L" in front of an ID represents event types that do not generate an associated SNMP notification<br>Most events do generate a notification, only the exceptions are marked with a preceding "L"                               |
| Event Name  | Displays the event name                                                                                                                                                                                                                                                                           |
| P           | CL — The event has a cleared severity/priority<br>CR — The event has critical severity/priority<br>IN — The event has indeterminate severity/priority<br>MA — The event has major severity/priority<br>MI — The event has minor severity/priority<br>WA — The event has warning severity/priority |
| g/s         | gen — The event is generated/logged by event control<br>sup — The event is suppressed or dropped by event control<br>thr — Specifies that throttling is enabled                                                                                                                                   |
| Logged      | Displays the number of events logged/generated                                                                                                                                                                                                                                                    |
| Dropped     | Displays the number of events dropped/suppressed                                                                                                                                                                                                                                                  |

file-id

Syntax

file-id [*log-file-id*]

Context

show>log

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays event file log information.

If no command line parameters are specified, a summary output of all event log files is displayed.

Specifying a file ID displays detailed information about the event file log.

Parameters

*log-file-id*

Displays detailed information about the specified event file log.

**Values**    1 to 99

Output

The following output is an example of event file log information, and [Table 68: Output fields: file ID](#) describes the output fields.

Sample output

```
A:ALA-4# show system security access-group
```

Table 68: Output fields: file ID

| Label          | Description                                                                                                              |
|----------------|--------------------------------------------------------------------------------------------------------------------------|
| file-id        | Displays the log file ID                                                                                                 |
| rollover       | Displays the rollover time for the log file, which is how long in between partitioning of the file into a new file       |
| retention      | Displays the retention time for the file in the system, which is how long the file should be retained in the file system |
| admin location | The primary flash device specified for the file location<br>none — indicates no specific flash device was specified      |
| oper location  | Displays the actual flash device on which the log file exists                                                            |

| Label     | Description                                                                                                              |
|-----------|--------------------------------------------------------------------------------------------------------------------------|
| file-id   | Displays the log file ID                                                                                                 |
| rollover  | Displays the rollover time for the log file, which is how long in between partitioning of the file into a new file       |
| retention | Displays the retention time for the file in the system, which is how long the file should be retained in the file system |
| file name | Displays the complete path name of the file associated with the log ID                                                   |
| expired   | Indicates whether the retention period for this file has passed                                                          |
| state     | in progress — Indicates the current open log file<br>complete — Indicates the old log file                               |

## filter-id

### Syntax

**filter-id** [*filter-id*]

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command displays event log filter policy information.

### Parameters

***filter-id***

Displays detailed information about the specified event filter policy ID.

**Values** 1 to 65535

### Output

The following outputs are examples of log filter policy information, and the associated tables describe the output fields.

- [Sample output — standard](#), [Table 69: Output fields: filter ID](#)
- [Sample output for match criteria](#), [Table 70: Output fields: filter ID match criteria](#)

### Sample output — standard

```
*A:ALA-48>config>log# show log filter-id
=====
Log Filters
=====
Filter Applied Default Description
Id Action

1 no forward
5 no forward
10 no forward
1001 yes drop Collect events for Serious Errors Log
=====
*A:ALA-48>config>log#
```

Table 69: Output fields: filter ID

| Label          | Description                                                                                                                                                                                                |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Filter Id      | Displays the event log filter ID                                                                                                                                                                           |
| Applied        | no — The event log filter is not currently in use by a log ID<br>yes — The event log filter is currently in use by a log ID                                                                                |
| Default Action | drop — The default action for the event log filter is to drop events not matching filter entries<br>forward — The default action for the event log filter is to forward events not matching filter entries |
| Description    | Displays the description string for the filter ID                                                                                                                                                          |

### Sample output for match criteria

```
*A:ALA-48>config>log# show log filter-id 1001
=====
Log Filter
=====
Filter-id : 1001 Applied : yes Default Action: drop
Description : Collect events for Serious Errors Log

Log Filter Match Criteria

Entry-id : 10 Action : forward
Application : Operator : off
Event Number : 0 Operator : off
Severity : major Operator : greaterThanOrEqual
Subject : Operator : off
Match Type : exact string :
Router : Operator : off
Match Type : exact string :
Description : Collect only events of major severity or higher

*A:ALA-48>config>log#
```

Table 70: Output fields: filter ID match criteria

| Label                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Entry-id                  | Displays the event log filter entry ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Action                    | <p>default — There is no explicit action for the event log filter entry and the filter's default action is used on matching events</p> <p>drop — The action for the event log filter entry is to drop matching events</p> <p>forward — The action for the event log filter entry is to forward matching events</p>                                                                                                                                                                                                                                                                                |
| Description<br>(Entry-id) | Displays the description string for the event log filter entry                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Application               | Displays the event log filter entry application match criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Event Number              | Displays the event log filter entry application event ID match criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Severity                  | <p>cleared — The log event filter entry application event severity cleared match criterion</p> <p>indeterminate — The log event filter entry application event severity indeterminate match criterion</p> <p>critical — The log event filter entry application event severity critical match criterion</p> <p>major — The log event filter entry application event severity cleared match criterion</p> <p>minor — The log event filter entry application event severity minor match criterion</p> <p>warning — The log event filter entry application event severity warning match criterion</p> |
| Subject                   | Displays the event log filter entry application event ID subject string match criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Router                    | Displays the event log filter entry application event ID <b>router</b> <i>router-instance</i> string match criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Operator                  | <p>There is an operator field for each match criteria:</p> <p>application, event number, severity, and subject</p> <p>equal — Matches when equal to the match criterion</p> <p>greaterThanOrEqual — Matches when greater than or equal to the match criterion</p> <p>lessThan — Matches when less than the match criterion</p>                                                                                                                                                                                                                                                                    |



| Label | Description                                                                |
|-------|----------------------------------------------------------------------------|
|       | lessThanOrEqualTo — Matches when less than or equal to the match criterion |
|       | notEqual — Matches when not equal to the match criterion                   |
|       | off — No operator specified for the match criterion                        |

## log-collector

### Syntax

log-collector

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command displays log collector statistics for the main, security, change, and debug log collectors.

### Output

The following output is an example of log collector information, and [Table 71: Output fields: log collector](#) describes the output fields.

#### Sample output

```
A:ALA-1# show log log-collector
=====
Log Collectors
=====
Main Logged : 1224 Dropped : 0
 Dest Log Id: 99 Filter Id: 0 Status: enabled Dest Type: memory
 Dest Log Id: 100 Filter Id: 1001 Status: enabled Dest Type: memory

Security Logged : 3 Dropped : 0

Change Logged : 3896 Dropped : 0

Debug Logged : 0 Dropped : 0

=====
A:ALA-1#
```

Table 71: Output fields: log collector

| Label            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <Collector Name> | <p>Main — The main event stream contains the events that are not explicitly directed to any other event stream</p> <p>Security — The security stream contains all events that affect attempts to breach system security such as failed login attempts, attempts to access MIB tables to which the user is not granted access or attempts to enter a branch of the CLI to which access has not been granted</p> <p>Change — The change event stream contains all events that directly affect the configuration or operation of this node</p> <p>Debug — The debug-trace stream contains all messages in the debug stream</p>                                                                                                                                                                                                                                                                                                     |
| Dest. Log ID     | Specifies the event log stream destination                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Filter ID        | <p>The value is the index to the entry which defines the filter to be applied to this log's source event stream to limit the events output to this log's destination</p> <p>If the value is 0, then all events in the source log are forwarded to the destination</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Status           | <p>Enabled — Logging is enabled</p> <p>Disabled — Logging is disabled</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dest. Type       | <p>Console — A log created with the console type destination displays events to the physical console device</p> <p>Events are displayed to the console screen whether a user is logged in to the console or not</p> <p>A user logged in to the console device or connected to the CLI via a remote Telnet or SSH session can also create a log with a destination type of 'session'. Events are displayed to the session device until the user logs off. When the user logs off, the 'session' type log is deleted</p> <p>Syslog — All selected log events are sent to the syslog address</p> <p>SNMP traps — Events defined as SNMP traps are sent to the configured SNMP trap destinations and are logged in NOTIFICATION-LOG-MIB tables</p> <p>File — All selected log events are directed to a file on one of the compact flash disks</p> <p>Memory — All selected log events are directed to an in-memory storage area</p> |

## log-id

### Syntax

**log-id** [*log-id*] [**severity** *severity-level*] [**application** *application*] [**sequence** *from-seq* [*to-seq*]] [**count** *count*] [**router** *router-instance* [**expression**]] [**subject** *subject* [**regexp**]] [**ascending** | **descending**]

### Context

show>log

### Platforms

Supported on all 7210 SAS platforms as described in this document

### Description

This command displays an event log summary with settings and statistics or the contents of a specific log file, SNMP log, or memory log.

If the command is specified with no command line options, a summary of the defined system logs is displayed. The summary includes log settings and statistics.

If the log ID of a memory, SNMP, or file event log is specified, the command displays the contents of the log. Additional command line options control what and how the contents are displayed.

Contents of logs with console, session, or syslog destinations cannot be displayed. The actual events can only be viewed on the receiving syslog or console device.

### Parameters

#### *log-id*

Displays the contents of the specified file log or memory log ID. The log ID must have a destination of an SNMP or file log or a memory log for this parameter to be used.

**Default** displays the event log summary

**Values** 1 to 99

#### *severity-level*

Displays only events with the specified and higher severity.

**Default** all severity levels

**Values** cleared, indeterminate, critical, major, minor, warning

#### *application*

Displays only events generated by the specified application.

**Default** all applications

#### *expression*

Specifies to use a regular expression as match criteria for the router instance string.

### ***from-seq [to-seq]***

Displays the log entry numbers from a particular entry sequence number (*from-seq*) to another sequence number (*to-seq*). The *to-seq* value must be larger than the *from-seq* value.

If the *to-seq* number is not provided, the log contents to the end of the log is displayed unless the **count** parameter is present in which case the number of entries displayed is limited by the **count**.

**Default** all sequence numbers

**Values** 1 to 4294967295

### ***count***

Limits the number of log entries displayed to the number specified.

**Default** all log entries

**Values** 1 to 4294967295

### ***router-instance***

Specifies a router name up to 32 characters to be used in the display criteria.

### ***subject***

Displays only log entries matching the specified text *subject* string, up to 32 characters. The subject is the object affected by the event, for example the port-id would be the subject for a link-up or link-down event.

### ***regexp***

Specifies to use a regular expression as parameters with the specified *subject* string.

### ***ascending | descending***

Specifies sort direction. Logs are normally shown from the newest entry to the oldest in **descending** sequence number order on the screen. When using the **ascending** parameter, the log are shown from the oldest to the newest entry.

**Default** Descending

## **Output**

The following outputs are examples of event log information, and the associated tables describe the output fields.

- [Sample output, Table 72: Output fields: log ID](#)
- [Sample output for memory or file event log contents](#)

### **Sample output**

```
A:ALA-1# show log log-id
=====
Event Logs
=====
Log Source Filter Admin Oper Logged Dropped Dest Dest Size
Id Id State State Type Id

1 none none up down 52 0 file 10 N/A
```

```

2 C none up up 41 0 syslog 1 N/A
99 M none up up 2135 0 memory 1 500
=====
A:ALA-1#

```

Table 72: Output fields: log ID

| Label       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Log Id      | Displays the event log destination                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Source      | no — The event log filter is not currently in use by a log ID<br>yes — The event log filter is currently in use by a log ID                                                                                                                                                                                                                                                                                                                                                                                              |
| Filter ID   | Displays the index to the entry which defines the filter to be applied to this log's source event stream to limit the events output to this log's destination. If the value is 0, then all events in the source log are forwarded to the destination.                                                                                                                                                                                                                                                                    |
| Admin State | Up — Indicates that the administrative state is up<br>Down — Indicates that the administrative state is down                                                                                                                                                                                                                                                                                                                                                                                                             |
| Oper State  | Up — Indicates that the operational state is up<br>Down — Indicates that the operational state is down                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Logged      | Displays the number of events that have been sent to the log sources that were forwarded to the log destination                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dropped     | Displays the number of events that have been sent to the log sources that were not forwarded to the log destination because they were filtered out by the log filter                                                                                                                                                                                                                                                                                                                                                     |
| Dest. Type  | Console — All selected log events are directed to the system console. If the console is not connected, all entries are dropped.<br>Syslog — All selected log events are sent to the syslog address<br>SNMP traps — Events defined as SNMP traps are sent to the configured SNMP trap destinations and are logged in NOTIFICATION-LOG-MIB tables<br>File — All selected log events are directed to a file on one of the compact flash disks<br>Memory — All selected log events are directed to an in-memory storage area |
| Dest ID     | Displays the event log stream destination                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Size        | Displays the allocated memory size for the log                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Time format | Displays the type of timestamp format for events sent to logs where log ID destination is either syslog or file.<br>When the time format is UTC, timestamps are written using the Coordinated Universal Time value.                                                                                                                                                                                                                                                                                                      |

| Label | Description                                                                       |
|-------|-----------------------------------------------------------------------------------|
|       | When the time format is local, timestamps are written in the system's local time. |

### Sample output for memory or file event log contents

```
A:gal171# show log log-id 99
=====
Event Log 99
=====
Description : Default System Log
Memory Log contents [size=500 next event=70 (not wrapped)]

69 2007/01/25 18:20:40.00 UTC CRITICAL: SYSTEM #2029 Base Redundancy
"The active CPM card A is operating in singleton mode. There is no standby CPM card
."

68 2007/01/25 17:48:38.16 UTC WARNING: SYSTEM #2006 Base LOGGER
"New event throttle interval 10, configuration modified"

67 2007/01/25 00:34:53.97 UTC CRITICAL: SYSTEM #2029 Base Redundancy
"The active CPM card A is operating in singleton mode. There is no standby CPM card
."

66 2007/01/24 22:59:22.00 UTC CRITICAL: SYSTEM #2029 Base Redundancy
"The active CPM card A is operating in singleton mode. There is no standby CPM card
."

65 2007/01/24 02:08:47.92 UTC CRITICAL: SYSTEM #2029 Base Redundancy
"The active CPM card A is operating in singleton mode. There is no standby CPM card
."
...
=====
A:gal171

A:NS061550532>config>log>snmp-trap-group# show log log-id 1
=====
Event Log 1
=====
SNMP Log contents [size=100 next event=3 (not wrapped)]
Cannot send to SNMP target address 10.1.1.1.

14 2000/01/05 00:54:09.11 UTC WARNING: MPLS #2007 Base VR 1:
"Instance is in administrative state: inService, operational state: inService"

13 2000/01/05 00:54:09.11 UTC WARNING: MPLS #2008 Base VR 1:
"Interface linkToIxia is in administrative state: inService, operational state: inSe
rvice"
....
=====
A:NS061550532>config>log>snmp-trap-group#
```

## snmp-trap-group

### Syntax

**snmp-trap-group** [/log-id]

**Context**  
show>log

**Platforms**  
Supported on all 7210 SAS platforms as described in this document

**Description**  
This command displays SNMP trap group configuration information.

**Parameters**  
**log-id**  
Displays only SNMP trap group information for the specified trap group log ID.  
**Values** 1 to 100

**Output**  
The following output is an example of SNMP trap group configuration information, and [Table 73: Output fields: SNMP trap group](#) describes the output fields.

**Sample SNMP trap group output**

```
A:SetupCLI>config>log>snmp-trap-group# show log snmp-trap-group 44
=====
SNMP Trap Group 44
=====
Description : none

Name : ntt-test
Address : 10.10.10.3
Port : 162
Version : v2c
Community : ntttesting
Sec. Level : none

Name : test2
Address : 10.20.20.5
Port : 162
Version : v2c
Community : ntttesting
Sec. Level : none
=====
A:SetupCLI>config>log>snmp-trap-group#
```

Table 73: Output fields: SNMP trap group

| Label   | Description                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------|
| Log-ID  | Displays the log destination ID for an event stream                                                         |
| Address | Displays the IP address of the trap receiver                                                                |
| Port    | Displays the destination UDP port used for sending traps to the destination, expressed as a decimal integer |

| Label          | Description                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------------------|
| Version        | Specifies the SNMP version format to use for traps sent to the trap receiver. Valid values are snmpv1, snmpv2c, snmpv3. |
| Community      | Displays the community string required by <b>snmpv1</b> or <b>snmpv2c</b> trap receivers                                |
| Security-Level | Displays the required authentication and privacy levels required to access the views on this node                       |

syslog

Syntax

**syslog** [*syslog-id*]

Context

show>log

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays syslog event log destination summary information or detailed information about a specific syslog destination.

Parameters

**syslog-id**

Displays detailed information about the specified syslog event log destination.

**Values**    1 to 10

Output

The following output is an example of syslog event log destination information, and [Table 74: Output fields: syslog](#) describes the output fields.

Sample output

```
*A:ALA-48>config>log# show log syslog
=====
Syslog Target Hosts
=====
```

| Id | Ip Address |            | Port   | Sev Level |           |
|----|------------|------------|--------|-----------|-----------|
|    | Below      | Level Drop |        | Facility  | Pfx Level |
| 2  | unknown    |            | 514    | info      |           |
|    | 0          |            | local7 | yes       |           |
| 3  | unknown    |            | 514    | info      |           |
|    | 0          |            | local7 | yes       |           |



```

5 unknown 514 info
 0 local7 yes
10 unknown 514 info
 0 local7 yes
=====
*A:ALA-48>config>log#

*A:MV-SR>config>log# show log syslog 1
=====
Syslog Target 1
=====
IP Address : 192.168.15.22
Port : 514
Log-ids : none
Prefix : Sr12
Facility : local1
Severity Level : info
Prefix Level : yes
Below Level Drop : 0
Description : Linux Station Springsteen
=====
*A:MV-SR>config>log#

```

Table 74: Output fields: syslog

| Label               | Description                                                                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syslog ID           | Displays the syslog ID number for the syslog destination                                                                                                                                         |
| IP Address          | Displays the IP address of the syslog target host                                                                                                                                                |
| Port                | Displays the configured UDP port number used when sending syslog messages                                                                                                                        |
| Facility            | Displays the facility code for messages sent to the syslog target host                                                                                                                           |
| Severity Level      | Displays the syslog message severity level threshold                                                                                                                                             |
| Below Level Dropped | Displays a count of messages not sent to the syslog collector target because the severity level of the message was above the configured severity<br>The higher the level, the lower the severity |
| Prefix Present      | Yes — A log prefix was prepended to the syslog message sent to the syslog host<br>No — A log prefix was not prepended to the syslog message sent to the syslog host                              |
| Description         | Displays a text description stored in the configuration file for a configuration context                                                                                                         |
| LogPrefix           | Displays the prefix string prepended to the syslog message                                                                                                                                       |
| Log-id              | Displays the destination to which events are directed                                                                                                                                            |

### 5.7.2.3 Clear commands

log

#### Syntax

**log** *log-id*

#### Context

clear

#### Platforms

Supported on all 7210 SAS platforms as described in this document

#### Description

This command reinitializes the specified memory/file event log ID. Memory logs are reinitialized and cleared of contents. File logs are manually rolled over by this command.

This command is only applicable to event logs that are directed to file destinations and memory destinations.

SNMP, syslog, and console/session logs are not affected by this command.

#### Parameters

*log-id*

Specifies the event log ID to be initialized/rolled over.

**Values** 1 to 100

## 6 TLS



**Note:** The 7210 SAS only supports the Transport Layer Security (TLS) client. It does not support the TLS server. Any reference to the TLS server in the following sections is included for completeness.

TLS is primarily used for the following:

- **authentication of an end device (client or server) using a digital signature (DS)**

TLS uses Public Key Infrastructure (PKI) for device authentication. DSs are used to authenticate clients or servers. The server typically sends a certificate with a DS to the client. In certain situations, the server can request a certificate from the client to authenticate it. The client has a certificate (called a trust anchor) from the certificate authority (CA), which is used to authenticate a server certificate and its DS. After the client provides a digitally signed certificate to the server and both parties are authenticated, the encryption Protocol Data Units (PDUs) are transmitted.

- **encryption and authentication of application PDUs**

After the clients and server are successfully authenticated, the cipher suite is negotiated between the server and clients, and the PDUs are encrypted based on the agreed-upon cipher protocol.

### 6.1 TLS client interaction with applications

On the 7210 SAS, TLS is a standalone configuration. The user must configure TLS profiles with certificates and cryptographic algorithms to use and then assign the TLS profiles to the appropriate applications. When a TLS profile is assigned to an application, the application does not send any clear text PDUs until the TLS handshake is successfully completed and the encryption ciphers are negotiated between the TLS server and the TLS client.

After successful negotiation and handshake, the TLS is operationally up and notifies the application, which begins transmitting PDUs. These PDUs are encrypted using TLS based on the agreed ciphers. At any point, if the TLS becomes operationally down, the application stops transmitting PDUs.

For example, the following sequence describes a TLS connection for generic TLS client application:

1. A TLS client profile is assigned to the application.
2. The application stops sending clear text PDUs because a TLS profile has been assigned and TLS is not ready to encrypt.
3. TLS begins the handshake.
4. Authentication occurs at the TLS layer.
5. The TLS server and TLS client negotiate ciphers.
6. Salts are negotiated for the symmetric key. A salt is a seed for creating Advanced Encryptions Standard (AES) encryption keys.
7. When negotiations are successfully completed, the handshake finishes and the application is notified.

8. TLS becomes operationally up, and the application can resume transmitting PDUs using the negotiated cipher. Until TLS is operationally up, application PDUs arriving from the peer (either server or client) are dropped.

6.1.1 TLS application support

The following table lists the applications that support TLS.


Table 75: TLS application support

| Application          | TLS server supported | TLS client supported |
|----------------------|----------------------|----------------------|
| Syslog               |                      | ✓                    |
| RADIUS <sup>10</sup> |                      | ✓                    |

6.2 TLS handshake

The following figure shows the TLS handshake.

Figure 10: TLS handshake

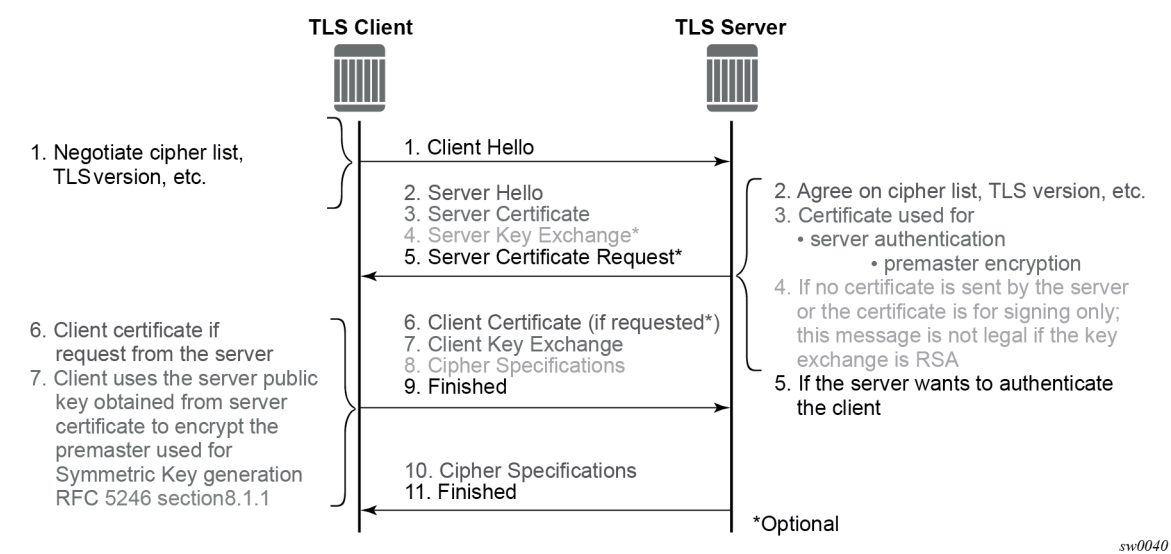

The following table describes the steps in the TLS handshake.

<sup>10</sup> RADIUS over TLS is supported for user logins.

Table 76: TLS handshake step descriptions

| Step | Description                                                                                                                                                                                                                                                                                                                                                                                          |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | The TLS handshake begins with the client Hello message. This message includes the cipher list that the client wants to use and negotiate, among other information.                                                                                                                                                                                                                                   |
| 2    | The TLS server sends back a server Hello message, along with the first common cipher found on both the client and server cipher lists. The common cipher is used for data encryption.                                                                                                                                                                                                                |
| 3    | The TLS server sends a server certificate message, in which the server provides a certificate that the client can use to authenticate the server identity. The public key of this certificate (RSA key) can also be used to encrypt the symmetric key seed used by the client and server to create the symmetric encryption key. This occurs only if the PKI is using RSA for asymmetric encryption. |
| 4    | 7210 SAS does not support server key exchange.<br>7210 SAS uses only RSA keys; Diffie-Hellman key exchange is not supported.                                                                                                                                                                                                                                                                         |
| 5    | The server can optionally be configured to request a certificate from the client to authenticate the client.                                                                                                                                                                                                                                                                                         |
| 6    | If the server requests a client certificate, the client must provide it by using a client certificate message. If the client does not respond to the certificate request, the server drops the TLS session.                                                                                                                                                                                          |
| 7    | The client uses the public server RSA key included in the server certificate to encrypt a seed. The client and server use this seed to create the identical symmetric key used for encrypting and decrypting data plane traffic.                                                                                                                                                                     |
| 8    | The client sends a cipher spec message to switch encryption to this symmetric key.                                                                                                                                                                                                                                                                                                                   |
| 9    | The client successfully finishes the handshake.                                                                                                                                                                                                                                                                                                                                                      |
| 10   | The server sends a cipher spec message to switch encryption to this symmetric key.                                                                                                                                                                                                                                                                                                                   |
| 11   | The server successfully finishes the handshake.                                                                                                                                                                                                                                                                                                                                                      |

After a successful handshake, TLS is operationally up and applications can use TLS for application encryption.

## 6.3 TLS 1.3

TLS 1.3 is required for faster handshakes and stronger encryption and authentication algorithms.

All 7210 SAS applications that use TLS 1.2 also support TLS 1.3, unless specifically stated otherwise.

The user can configure the node to use TLS 1.2, TLS 1.3, or both for negotiation with the peer.

When TLS 1.3 is negotiated with a peer, the node no longer negotiates the TLS version down to 1.2 as long as the session is alive.

### 6.3.1 TLS 1.3 handshake

The TLS 1.3 client handshake is very similar to TLS 1.2 because the client is able to negotiate TLS 1.2 or 1.3 when starting the TLS Hello message to the server. The client includes a "Supported Version" extension in its Hello message. The server responds with its own supported version, agreed ciphers, and so on.

In TLS 1.2 and TLS 1.3, the server can optionally request for the client certificate to authenticate the client. If requested, the client must provide its certificate to the server.

### 6.3.2 TLS 1.2 and TLS 1.3 configuration

Users must configure the following for TLS to function properly:

- TLS 1.2
  - cipher list
- TLS 1.3
  - cipher list
  - signature list
  - group list

During the TLS handshake, the client sends the following information in the TLS Hello message to the server:

- a list of cipher suites
- a list of supported signatures
- a list of groups for key exchange

The client and server can each configure their own signature, group, and cipher lists. During the handshake protocol between the client and server, the server selects the first group from the group list that it supports to use for the key exchange and negotiates the cipher and signature algorithm from the lists provided by the client.

#### TLS 1.3 client options and TLS client profile configuration

The following examples display the configuration of the TLS 1.3 client options and the TLS client profile.

### Example: Configure TLS 1.3 client information (classic CLI)

```
A:node-2>config>system>security>tls# info

 cert-profile "profile1" create
 no shutdown
 exit
 client-cipher-list "cipherlist1" create
 tls13-cipher 1 name tls-aes128-ccm8-sha256
 exit
 client-group-list "grouplist1" create
 tls13-group 1 name tls-ecdh-521
 exit
 client-signature-list "signaturelist1" create
 tls13-signature 1 name tls-rsa-pss-pss-sha512
 exit

```

### Example: Configure the TLS client profile (classic CLI)

```
A:node-2>config>system>security>tls# info

 client-tls-profile "profile1" create
 no shutdown
 cert-profile "profile1"
 cipher-list "cipherlist1"
 group-list "grouplist1"
 protocol-version tls-version13
 signature-list "signaturelist1"
 exit

```

## 6.4 TLS client certificate

The TLS protocol is used for authentication. It allows the server to authenticate the client via PKI. If the server requests authentication from the client, the client response must provide an X.509v3 certificate that the server can authenticate using the digital signature of its client. The 7210 SAS supports the configuration of an X.509v3 certificate for TLS clients. When the server requests a certificate using the Hello message, the client sends a client certificate message to transmit its certificate to the server.

## 6.5 Certificate revocation status verification for TLS

A certificate authority (CA) can revoke issued certificates by listing them in a certificate revocation list (CRL). In TLS, an optional CRL is applied for CA certificates. The CRL does not apply to the intermediate or end issuer of an end entity (EE) certificate. To extend this optional configuration to include EE certificates, use the status-verify default-result commands under the following contexts:

```
configure system security tls client-tls-profile
configure system security tls server-tls-profile
```

The command options are **revoked** (default value) or **good**.

This default result is used when the revocation status of a certificate cannot be determined because of an invalid CRL (for example, it is missing, expired, or corrupt).

The TLS **default-result** for EE certificates is set to **revoked** for safety purposes. If an expired CRL in the CA profile is matched as the issuer of the EE certificate, the EE certificate is treated as revoked. If the expired CRL is further up in the certificate chain, the optional CRL works as expected.

The **status-verify default-result** command allows users to override the recommended revocation check policy when there is legitimate reason to accept EE certificates without checking their revocation status (for example, to keep the automatic CRL update working during a temporary network issue).

## 6.6 Supported TLS ciphers

As shown in [TLS handshake](#), TLS negotiates the supported ciphers between the client and the server.

The client sends the supported cipher suites in the client Hello message, and the server compares them with the server cipher list. The top protocol on both lists is chosen and returned from the server within the server Hello message.

7210 SAS supports the following TLS 1.2 ciphers as a TLS client:

- `tls-rsa-with3des-edc-cbc-sha`
- `tls-rsa-with-aes128-cbc-sha`
- `tls-rsa-with-aes256-cbc-sha`
- `tls-rsa-with-aes128-cbc-sha256`
- `tls-rsa-with-aes256-cbc-sha256`
- `tls-rsa-with-aes128-gcm-sha256`
- `tls-rsa-with-aes256-gcm-sha384`

The 7210 SAS supports the following TLS 1.3 ciphers, groups, and signature algorithms as a TLS client:

- `tls-aes128-gcm-sha256`
- `tls-aes256-gcm-sha384`
- `tls-chacha20-poly1305-sha256`
- `tls-aes128-ccm-sha256`
- `tls-aes128-ccm8-sha256`
- **Groups:**
  - `tls-ecdhc-256`
  - `tls-ecdhc-384`
  - `tls-ecdhc-521`
  - `tls-x25519`
  - `tls-x448`
- **Signature algorithms:**
  - `tls-rsa-pkcs1-sha256`
  - `tls-rsa-pkcs1-sha384`



- tls-rsa-pkcs1-sha512
- tls-eccdsa-secp256r1-sha256
- tls-eccdsa-secp384r1-sha384
- tls-eccdsa-secp521r1-sha512
- tls-rsa-pss-rsae-sha256
- tls-rsa-pss-rsae-sha384
- tls-rsa-pss-rsae-sha512
- tls-rsa-pss-pss-sha256
- tls-rsa-pss-pss-sha384
- tls-rsa-pss-pss-sha512
- tls-ed25519
- tls-ed448

## 6.7 7210 SAS certificate management

The 7210 SAS implements a centralized certificate management that can be used by TLS.

Use the commands in the following contexts to configure and manage certificates:

```
admin certificate
```

### 6.7.1 Certificate profile

The certificate profile is available for the TLS client. The **cert-profile** command is configured for the client to transmit the provider certificate and its DS to the peer so that the peer can authenticate it via the **trust-anchor** and CA certificate.

Multiple provider certificates can be configured on the 7210 SAS; however, the 7210 SAS currently uses the smallest index as the active provider certificate, and only sends the certificate to the peer.

## 6.8 Operational guidelines

This section provides operational guidelines for TLS.

### 6.8.1 TLS authentication behavior (client-side)

Following the Hello messages, if the certificate must be authenticated, the server sends its certificate in a certificate message. If required, a ServerKeyExchange message may also be sent.

Use the commands in the following context to configure client TLS security. The **trust-anchor-profile** command determines whether the server must be authenticated by the client.

```
configure system security tls client-tls-profile trust-anchor-profile
```



**Note:**

If the **trust-anchor-profile** command is configured and the **ca-certificate** or **ca-profile** is missing from this **trust-anchor-profile**, the TLS connection fails and an "unknown\_ca" error is generated, as defined in RFC 5246 section 7.2.2.

One of the following configurations can be used to establish server connectivity:

- If the **trust-anchor-profile** command is configured under the **configure system security tls client-tls-profile** context, the server must be authenticated using the **trust-anchor-profile** command before a trusted connection is established between the server and the client.
- If there is no **trust-anchor-profile** command under the **configure system security tls client-tls-profile** context, the trusted connection can be established without server authentication. The RSA key of the certificate is used for public key encryption, requiring the following basic checks to validate the certificate:
  - **time validity**  
The certificate is checked to ensure that it is neither expired nor not yet valid.
  - **certificate type**  
The certificate is not a CA certificate.
  - **keyUsage extension**  
If present, this must contain a digital signature and key encryption.
  - **host verification**  
The IP address or DNS name of the server is looked up, if available (for LDAP, only the IP address is used), in the common name (cn) or subjectAltName extension. This is to verify that the certificate was issued to that server and not to another.

## 6.8.2 Client TLS profile and trust anchor behavior and scale

The 7210 SAS supports the creation of client TLS profiles, which can be assigned to applications such as LDAP to encrypt the application layer.

The **client-tls-profile** command is used for negotiating and authenticating the server. After the server is authenticated via the trust anchor profile (configured using the **trust-anchor-profile** command) of a client TLS profile, the server negotiates the ciphers and authentication algorithms to use for data encryption.

The client TLS profile must be assigned to an application for it to start encrypting. Up to 16 client TLS profiles can be configured. Because each of these client TLS profiles needs a trust anchor profile to authenticate the server, up to 16 trust anchor profiles can be configured. A trust anchor profile holds up to 8 trust anchors (configured using the **trust-anchor** command), each of which holds a CA profile (**ca-profile**).

A CA profile is a container for installing CA certificates (**ca-certificates**). The CA certificates are used to authenticate the server certificate. When the client receives the server certificate, the client reads through the trust anchor profile CA certificates and tries to authenticate the server certificate against each CA certificate. The first CA certificate that authenticates the server is used.

## 6.9 Basic TLS configuration

Basic TLS client configuration requires the following:

- Use the following command to create a cipher list.

```
configure system security tls client-cipher-list
```

- Use the following command to assign a TLS cipher list to the TLS client profile.

```
configure system security tls client-tls-profile cipher-list
```

## 6.10 Common configuration tasks

This section provides information about common configuration tasks.

### 6.10.1 Configuring a client TLS profile

Use the following command to configure a client TLS profile.

```
configure system security tls client-tls-profile
```

### 6.10.2 Configuring a TLS client certificate

Use the following commands to configure TLS certificate management.

```
configure system security tls cert-profile
configure system security tls client-tls-profile cert-profile
```

### 6.10.3 Configuring a TLS trust anchor

Use the commands in the following contexts to configure a TLS trust anchor.

```
configure system security pki ca-profile
configure system security pki certificate-display-format
configure system security tls trust-anchor-profile
configure system security tls client-tls-profile
```

#### Example: TLS trust anchor

```
A:node-2>config>system>security>pki# info

ca-profile "tls-server-1-ca" create
cert-file "tls-1-Root-CERT"
crl-file "tls-1-CRL-CERT"
no shutdown
exit
```

```

A:node-2>config>system>security>tls# info

 trust-anchor-profile "server-1-ca" create
 trust-anchor "tls-server-1-ca"
 exit
 client-tls-profile "server-1-profile" create
 cipher-list "to-active-server"
 trust-anchor-profile "server-1-ca"
 no shutdown
 exit
```

## 6.11 TLS command reference

### 6.11.1 Command hierarchies

- [Configuration commands](#)
- [Show commands](#)

#### 6.11.1.1 Configuration commands

- [TLS commands](#)
- [Certificate management commands](#)
- [PKI commands](#)

##### 6.11.1.1.1 TLS commands

```
config
- system
 - security
 - tls
 - cert-profile profile-name [create]
 - no cert-profile profile-name
 - entry entry-id [create]
 - no entry entry-id
 - cert cert-filename
 - no cert
 - key key-filename
 - no key
 - [no] shutdown
 - client-cipher-list name [create]
 - no client-cipher-list name
 - cipher index name cipher-suite-code
 - no cipher index
 - tls13-cipher index name cipher-suite-code
 - no tls13-cipher index
 - client-group-list name [create]
 - no client-group-list name
 - tls13-group index name group-suite-code
 - no tls13-group index
 - client-signature-list name [create]
```

```
- no client-signature-list name
 - tls13-signature index name signature-suite-code
 - no tls13-signature index
- client-tls-profile name [create]
- no client-tls-profile name
 - cert-profile name
 - no cert-profile
 - cipher-list name
 - no cipher-list
 - group-list name
 - no group-list
 - protocol-version TLS version
 - no protocol-version
 - [no] shutdown
 - signature-list name
 - no signature-list
 - status-verify default-result {revoked | good}
 - no status-verify
 - trust-anchor-profile name
 - no trust-anchor-profile
```

### 6.11.1.1.2 Certificate management commands

```
admin
- certificate
 - convert-file filename to output-file-name format {secure | legacy} [force]
 - crt-update ca ca-profile-name
 - display type {cert | key} url-string format {pkcs10 | pkcs12 | pkcs7-der | pkcs7-pem
 | pem | der} [password password]
 - export type {cert | key | crt} input input-filename output url-string format output-
 format [password [password]] [pkey pkey-filename]
 - gen-keypair url-string [size {512 | 1024 | 2048}] [type {rsa | dsa}]
 - gen-local-cert-req keypair url-string subject-dn subject-dn [domain-name domain-
 names] [ip-addr ip-address | ipv6-address] file url-string [use-printable]
 - import type {cert | key} input url-string output filename format input-format
 [password password]
```

### 6.11.1.1.3 PKI commands

```
config
- system
 - security
 - pki
 - ca-profile name [create]
 - no ca-profile name
 - cert-file filename
 - no cert-file
 - crt-file filename
 - no crt-file
 - description description-string
 - no description
 - revocation-check {crl | crt-optional}
 - [no] shutdown
 - certificate-display-format {ascii | utf8}
 - certificate-expiration-warning hours [repeat repeat-hours]
 - no certificate-expiration-warning
 - crt-expiration-warning hours [repeat repeat-hours]
 - no crt-expiration-warning
```

```
- imported-format {any | secure}
- maximum-cert-chain-depth level
```

### 6.11.1.2 Show commands

```
show
- system
 - security
 - tls
 - cert-profile name association
 - cert-profile [name]
 - cert-profile [name] entry entry
 - client-tls-profile [client-tls-profile]
 - client-tls-profile client-tls-profile connections
 - trust-anchor-profile trust-anchor-profile association
 - trust-anchor-profile [trust-anchor-profile]

show
- certificate
 - ca-profile
 - ca-profile auto-crl-update
 - ca-profile name [association]
```

## 6.12 Command descriptions

- [Configuration commands](#)
- [Show commands](#)

### 6.12.1 Configuration commands

- [TLS commands](#)
- [Certificate management commands](#)
- [PKI commands](#)

#### 6.12.1.1 TLS commands

tls

#### Syntax

tls

#### Context

config>system>security

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

Commands in this context configure Transport Layer Security (TLS) parameters.

## cert-profile

## Syntax

**cert-profile** *profile-name* [**create**]

**no cert-profile** *profile-name*

## Context

config>system>security>tls

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

Commands in this context configure TLS certificate profile information. The certificate profile contains certificates that are sent to the TLS peer (server) to authenticate itself. It is mandatory for the TLS server to send this information. The TLS client may optionally send this information upon request from the TLS server.

The **no** form of this command deletes the specified TLS certificate profile.

## Default

no cert-profile

## Parameters

***profile-name***

Specifies the TLS certificate profile name, up to 32 characters in length.

**create**

Keyword used to create the TLS certificate profile.

## entry

## Syntax

**entry** *entry-id* [**create**]

**no entry** *entry-id*

## Context

config>system>security>tls>cert-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

Commands in this context configure an entry for the TLS certificate profile. A certificate profile may have up to eight entries. Currently, TLS uses the entry with the smallest ID number when responding to server requests.

The **no** form of this command deletes the specified entry.

## Default

no entry

## Parameters

### *entry-id*

Specifies the ID of the TLS certificate profile entry.

**Values** 1 to 8

### **create**

Keyword used to create the TLS certificate profile entry.

## cert

## Syntax

**cert** *cert-filename*

**no cert**

## Context

config>system>security>tls>cert-profile>entry

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the filename of an imported certificate for the **cert-profile** entry.

The **no** form of this command removes the certificate.

## Default

no cert



## Parameters

### ***cert-filename***

Specifies the filename of the TLS certificate, up to 95 characters in length.

## key

## Syntax

**key** *key-filename*

**no key**

## Context

config>system>security>tls>cert-profile>entry

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the filename of an imported key for the **cert-profile** entry.

The **no** form of this command removes the key.

## Default

no key

## Parameters

### ***key-filename***

Specifies the filename of the key, up to 95 characters in length.

## client-cipher-list

## Syntax

**client-cipher-list** *name* [**create**]

**no client-cipher-list** *name*

## Context

config>system>security>tls

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

Commands in this context create a cipher list that the client sends to the server in the client Hello message. It is a list of ciphers supported and preferred by the 7210 SAS TLS client for use in the TLS session. The server matches this list against the server cipher list. The most preferred cipher found in both lists is chosen.

The **no** form of this command removes cipher list.

## Default

no client-cipher-list

## Parameters

### *name*

Specifies the name of the client cipher list, up to 32 characters in length.

### *create*

Keyword used to create the client cipher list.

## cipher

## Syntax

**cipher** *index name cipher-suite-code*

**no cipher** *index*

## Context

config>system>security>tls>client-cipher-list

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command configures the cipher suite to be negotiated by the server and client.

The **no** form of this command removes the cipher suite.

## Default

no cipher

## Parameters

### *index*

Specifies the index number. The index number indicates the location of the cipher in the negotiation list, with the lower index numbers appearing higher in the list and the higher index numbers appearing at the bottom of the list.

**Values** 1 to 255

***cipher-suite-code***

Specifies the cipher suite code.

|               |                                |
|---------------|--------------------------------|
| <b>Values</b> | tls-rsa-with3des-ede-cbc-sha   |
|               | tls-rsa-with-aes128-cbc-sha    |
|               | tls-rsa-with-aes256-cbc-sha    |
|               | tls-rsa-with-aes128-cbc-sha256 |
|               | tls-rsa-with-aes256-cbc-sha256 |
|               | tls-rsa-with-aes128-gcm-sha256 |
|               | tls-rsa-with-aes256-gcm-sha384 |

tls13-cipher

**Syntax**

**tls13-cipher** *index name cipher-suite-code*  
**no tls13-cipher** *index*

**Context**

config>system>security>tls>client-cipher-list

**Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

**Description**

This command configures the TLS 1.3-supported ciphers that are used by the client and server.  
The **no** form of this command removes the cipher suite.

**Default**

no tls13-cipher

**Parameters**

***index***

Specifies the index number. The index number indicates the location of the cipher in the negotiation list, with the lower index numbers appearing higher in the list and the higher index numbers appearing at the bottom of the list.

|               |          |
|---------------|----------|
| <b>Values</b> | 1 to 255 |
|---------------|----------|

***cipher-suite-code***

Specifies the cipher suite code.

|               |                       |
|---------------|-----------------------|
| <b>Values</b> | tls-aes128-gcm-sha256 |
|               | tls-aes256-gcm-sha384 |

tls-chacha20-poly1305-sha256  
tls-aes128-ccm-sha256  
tls-aes128-ccm8-sha256

## client-group-list

### Syntax

**client-group-list** *name* [**create**]  
**no client-group-list** *name*

### Context

config>system>security>tls

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

Commands in this context configure a list of group suite codes that the client sends in a client Hello message.

The **no** form of this command removes the client group list.

### Default

no client-group-list

### Parameters

***name***

Specifies the name of the client group list, up to 32 characters.

***create***

Keyword used to create the client group list.

## tls13-group

### Syntax

**tls13-group** *index name group-suite-code*  
**no tls13-group** *index*

### Context

config>system>security>tls>client-group-list

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command configures the TLS 1.3-supported group suite codes sent by the client or server in their respective Hello messages.

The 7210 SAS TLS client supports the use of Elliptic-curve Diffie-Hellman Ephemeral (ECDHE) groups.

The **no** form of this command removes the group suite code.

Default

no tls13-group

Parameters

*index*

Specifies the index number, that indicates the location of the group suite code in the client or server group list. The lower index numbers are higher in the list, and the higher index numbers are at the bottom of the list.

**Values** 1 to 255

*group-suite-code*

Specifies the group suite code.

**Values**   tls-ecdh-256  
              tls-ecdh-384  
              tls-ecdh-521  
              tls-x25519  
              tls-x448

client-signature-list

Syntax

**client-signature-list** *name* [**create**]

**no client-signature-list** *name*

Context

config>system>security>tls

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

Commands in this context configure a list of TLS 1.3-supported signature suite codes that the client sends in a client Hello message.

The **no** form of this command removes the client signature list.

## Default

no client-signature-list

## Parameters

### *name*

Specifies the name of the client signature list, up to 32 characters.

### *create*

Keyword used to create the client signature list.

## tls13-signature

## Syntax

**tls13-signature** *index* **name** *signature-suite-code*

**no** **tls13-signature** *index*

## Context

config>system>security>tls>client-signature-list

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command configures the TLS 1.3-supported signature suite codes sent by the client or server in their respective Hello messages.

The **no** form of this command removes the signature suite code.

## Default

no tls13-signature

## Parameters

### *index*

Specifies the index number, that indicates the location of the signature suite code in the client or server group list. The lower index numbers are higher in the list, and the higher index numbers are at the bottom of the list.

**Values** 1 to 255

**signature-suite-code**

Specifies the signature suite code.

|        |                            |
|--------|----------------------------|
| Values | tls-rsa-pkcs1-sha256       |
|        | tls-rsa-pkcs1-sha384       |
|        | tls-rsa-pkcs1-sha512       |
|        | tls-ecdsa-secp256r1-sha256 |
|        | tls-ecdsa-secp384r1-sha384 |
|        | tls-ecdsa-secp521r1-sha512 |
|        | tls-rsa-pss-rsae-sha256    |
|        | tls-rsa-pss-rsae-sha384    |
|        | tls-rsa-pss-rsae-sha512    |
|        | tls-rsa-pss-pss-sha256     |
|        | tls-rsa-pss-pss-sha384     |
|        | tls-rsa-pss-pss-sha512     |
|        | tls-ed25519                |
|        | tls-ed448                  |

client-tls-profile

**Syntax**

**client-tls-profile** *name* [create]  
**no client-tls-profile** *name*

**Context**

config>system>security>tls

**Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

**Description**

Commands in this context configure the TLS client profile to be assigned to applications for encryption.  
The **no** form of this command removes the TLS client profile.

**Default**

no client-tls-profile

**Parameters**

**name**  
Specifies the name of the client TLS profile, up to 32 characters in length.

## **create**

Keyword used to create the client TLS profile.

## **cert-profile**

### **Syntax**

**cert-profile** *name*

**no cert-profile**

### **Context**

config>system>security>tls>client-tls-profile

### **Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### **Description**

This command assigns a TLS certificate profile to be used by the TLS client profile. This certificate is sent to the server for the authentication of the client and public key.

The **no** form of this command removes the TLS certificate profile assignment.

### **Default**

no cert-profile

### **Parameters**

*name*

Specifies the name of the TLS certificate profile, up to 32 characters in length.

## **cipher-list**

### **Syntax**

**cipher-list** *name*

**no cipher-list**

### **Context**

config>system>security>tls>client-tls-profile

### **Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D



## Description

This command assigns the cipher list to be used by the TLS client profile for negotiation in the client Hello message.

The **no** form of this command removes the cipher list assignment.

## Default

no cipher-list

## Parameters

***name***

Specifies the name of the cipher list, up to 32 characters in length.

group-list

## Syntax

**group-list** *name*

**no group-list**

## Context

config>system>security>tls>client-tls-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command assigns an existing TLS 1.3 group list to the TLS client profile.

The **no** form of this command removes the group list from the client profile.

## Default

no group-list

## Parameters

***name***

Specifies the name of the group list, up to 32 characters in length.

protocol-version

## Syntax

**protocol-version** *TLS version*

**no protocol-version**

**Context**

config>system>security>tls>client-tls-profile

**Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

**Description**

This command configures the TLS version to be negotiated between the client and server.

When configured, the client adds the specified version as a supported version in its Hello message to the server. If the **tls-version-all** parameter is specified, the client adds both TLS 1.2 and TLS 1.3 as supported versions in its Hello message.

The **no** form of this command reverts to the default TLS version.

**Default**

protocol-version tls-version12

**Parameters**

**TLS version**

Specifies the TLS version to include in the client Hello message.

|               |                 |
|---------------|-----------------|
| <b>Values</b> | tls-version12   |
|               | tls-version13   |
|               | tls-version-all |

signature-list

**Syntax**

**signature-list** *name*

**no signature-list**

**Context**

config>system>security>tls>client-tls-profile

**Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

**Description**

This command assigns an existing TLS 1.3 signature list to the TLS client profile.

The **no** form of this command removes the signature list from the client profile.

**Default**

no signature-list

## Parameters

### *name*

Specifies the name of the signature list, up to 32 characters in length.

## status-verify

## Syntax

**status-verify default-result {revoked | good}**

**no status-verify**

## Context

config>system>security>tls>client-tls-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command configures the certificate revocation status verification parameters for end-entity (EE) certificates in the TLS client or server. This configuration overrides the existing revocation check policy.

By default the router checks the certification revocation status, but if this command is set to **good**, the end-entity certificate revocation status is overwritten and a good revocation status is returned for the EE certificate.

If this command is set to **revoked**, the router returns the actual revocation status of the end-entity certificate.

The **no** form of this command returns the actual revocation status to that of the end entity certificate.

## Default

status-verify default-result revoked

## Parameters

### **good**

Keyword to specify that the certificate is considered acceptable.

### **revoked**

Keyword to specify that the certificate is considered revoked.

## trust-anchor-profile

## Syntax

**trust-anchor-profile** *name*

**no trust-anchor-profile**

### Context

config>system>security>tls>client-tls-profile

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command assigns the trust anchor used by this TLS profile to authenticate the client.

The **no** form of this command removes the configured trust anchor profile.

### Default

no trust-anchor-profile

### Parameters

*name*

Specifies the name of the trust anchor profile, up to 32 characters in length.

## 6.12.1.2 Certificate management commands

### certificate

#### Syntax

**certificate**

#### Context

admin

#### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

#### Description

Commands in this context configure X.509 certificate-related operational parameters.

### convert-file

#### Syntax

**convert-file** *filename* **to** *output-file-name* **format** {**secure** | **legacy**} [**force**]

#### Context

admin>certificate

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command converts imported certificates and keys in the `cf1:/system-pki` directory between secure and legacy format.

## Parameters

### ***filename***

Specifies an existing filename, up to 95 characters.

### ***output-file-name***

Specifies the output file name, up to 95 characters. If the output filename already exists, and the **force** keyword is not selected, the system prompts to proceed or abort.

### **format**

Specifies the target format.

**Values**    `secure` — Specifies the enhanced secure format  
              `legacy` — Specifies the legacy format

### **force**

Keyword to force the conversion, even if there is an existing file with the same output filename.

## crl-update

## Syntax

**crl-update ca** *ca-profile-name*

## Context

admin>certificate

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command manually triggers the Certificate Revocation List file (CRL) update for the specified CA profile.

Using this command requires shutting down the **auto-crl-update** command.

## Parameters

### ***ca-profile-name***

Specifies the CA profile name, up to 32 characters.

## display

### Syntax

**display** **type** {**cert** | **key**} *url-string* **format** {**pkcs10** | **pkcs12** | **pkcs7-der** | **pkcs7-pem** | **pem** | **der**}  
[**password** *password*]

### Context

admin>certificate

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command displays the content of an input file in plain text.

The following list summarizes the formats supported by this command:

- System
  - system format
  - PKCS #12
  - PKCS #7 PEM encoded
  - PKCS #7 DER encoded
  - RFC 4945
- Key
  - system format
  - PKCS #12

### Parameters

#### *url-string*

Specifies the local CF card URL of the input file.

**Values**    **url-string:** <local-url> [up to 99 characters]  
              **local-url:** <cflash-id | usb-flash-id>/<file-path>



**Note:**

The *usb-flash-id* parameter is applicable only to platforms that support USB port and USB storage devices.

cflash-id: cf1:

#### **type**

Keyword to specify the type of input file.

**Values**    cert, key

### **format**

Keyword to specify the format of input file.

**Values** pkcs10, pkcs12, pkcs7-der, pkcs7-pem, pem, der

### *password*

Specifies the password , up to 99 characters in length, to decrypt the input file, if it is an encrypted PKCS#12 file.

## **export**

### **Syntax**

**export type {cert | key | crl} input input-filename output url-string format output-format [password [password]] [pkey pkey-filename]**

### **Context**

admin>certificate

### **Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### **Description**

This command performs certificate operations.

### **Parameters**

#### **type**

Keyword to specify the type of output file.

**Values** cert, key, crl

#### **input-filename**

Specifies the name of the input file, up to 95 characters in length.

#### **url-string**

Specifies the local CF card URL of the file.

**Values** url-string: <local-url> [up to 99 characters]  
local-url: <cflash-id>/<file-path>  
cflash-id: cf1:

#### **output-format**

Keyword to specify the format of the output file.

**Values** pkcs12, pkcs7-der, pkcs7-pem, pem, der

*password*

Specifies the password, up to 32 characters in length, to decrypt the input file if it is an encrypted PKCS#12 file.

*pkey-filename*

Specifies the name of the P key file, up to 95 characters in length.

## gen-keypair

### Syntax

**gen-keypair** *url-string* [**size** {512 | 1024 | 2048}] [**type** {rsa | dsa}]

### Context

admin>certificate

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command generates RSA, DSA, or ECDSA private key or public key pairs at the specified location.

### Parameters

***url-string***

Specifies the path of the key file.

**Values** url-string: <local-url> [up to 99 characters]

local-url: <cflash-id>/<file-path>

cflash-id: cf1:

**size**

Keyword to specify the key size in bits.

**Values** 512, 1024, 2048

**type**

Keyword to specify the type of key.

**Values** rsa, dsa

## gen-local-cert-req

### Syntax

**gen-local-cert-req** **keypair** *url-string* **subject-dn** *subject-dn* [**domain-name** *domain-names*] [**ip-addr** *ip-address* | *ipv6-address*] **file** *url-string* [**use-printable**]



## Context

admin>certificate

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command generates a PKCS#10 formatted certificate request by using a local existing key pair file.

## Parameters

### *url-string*

Specifies the name of the keyfile in `cf1:\system-pki\key` that is used to generate a certificate request.

**Values** url-string: <local-url> [up to 99 characters]

local-url: <cflash-id>/<file-path>

cflash-id: cf1:

### *subject-dn*

Specifies the distinguished name that is used as the subject in a certificate request, including:

- C-Country
- ST-State
- O-Organization name
- OU-Organization Unit name
- CN-Common Name

This parameter is formatted as a text string including any of the above attributes. The attribute and its value is linked by using "=", and "," is used to separate different attributes, for example: C=US,ST=CA,O=ALU,CN=SR12.

**Values** attr1=val1,attr2=val2... where: attrN={C| ST| O| OU| CN}, 256 chars max

### *domain-names*

Specifies a domain name string can be specified and included as the `dNSName` in the Subject Alternative Name extension of the certificate request, up to 512 characters in length.

### *ip-address | ipv6-address*

Specifies an IPv4 or IPv6 address string that can be included as the `ipAddress` in the Subject Alternative Name extension of the certificate request, up to 64 characters in length.

### **use-printable**

Keyword to specify to encode the certificate in printable text format instead of UTF8.

## import

### Syntax

**import type {cert | key} input *url-string* output *filename* format *input-format* [password *password*]**

### Context

admin>certificate

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command converts an input file (key or certificate) to a system format file. The following list summarizes the formats supported by this command:

- Certificate
  - PKCS #12
  - PKCS #7 PEM encoded
  - PKCS #7 DER encoded
  - PEM
  - DER
- Key
  - PKCS #12
  - PEM
  - DER



**Note:** If the input file contains multiple objects of the same type, only the first object is extracted and converted.

### Parameters

#### *url-string*

Specifies the URL for the input file. This URL could be either a local CF card URL file or an FTP URL to download the input file.

**Values**    url-string: <local-url> [up to 99 characters]  
              local-url: <cflash-id>/<file-path>  
              cflash-id: cf1:

#### *filename*

Specifies the name of the output file, up to 95 characters in length. The output directory is cf1:\system-pki.

### **type**

Keyword to specify the type of input file.

**Values** cert, key

### **input-format**

Keyword to specify the format of the input file.

**Values** pkcs12, pkcs7-der, pkcs7-pem, pem, der

### *password*

Specifies the password, up to 32 characters in length, to decrypt the input file if it is an encrypted PKCS#12 file.

## **6.12.1.3 PKI commands**

### **pki**

#### **Syntax**

**pki**

#### **Context**

config>system>security

#### **Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

#### **Description**

Commands in this context configure Public Key Infrastructure (PKI) parameters.

### **ca-profile**

#### **Syntax**

**ca-profile** *name* [create]

**no ca-profile** *name*

#### **Context**

config>system>security>pki

#### **Platforms**

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command creates a new CA profile or enters the context of an existing CA profile. Up to 128 CA profiles can be created in the system. A **shutdown** of the **ca-profile** command does not affect the current up and running **ipsec-tunnel** associated with the **ca-profile**; however, subsequent authentication fails.

Executing a **no shutdown** command in this context causes the system to reload the configured **cert-file** and **crl-file**.

A **ca-profile** can be applied under the **ipsec-tunnel** configuration.

The **no** form of this command removes the name parameter from the configuration. A CA profile cannot be removed until all the associations (IPSec tunnels) are removed.

## Default

no ca-profile

## Parameters

### **name**

Specifies the CA profile name, up to 32 characters in length.

### **create**

Keyword used to create the CA profile.

## cert-file

## Syntax

**cert-file** *filename*

**no cert-file**

## Context

config>system>security>pki>ca-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the name of a file as the CA certificate of the CA profile and saves it in the `cf1:\system-pki\cert` directory.

When a **no shutdown** command is issued, the system checks the following against the configured **cert-file**:

- The configured **cert-file** is a DER-formatted X.509v3 certificate file.
- All mandatory fields defined in section 4.1 of RFC5280 exist and conform to the RFC 5280-defined format.
- The Version field has a value of 0x2.
- The Validity field indicates that the certificate is still valid.

- The X.509 basic constraints extension exists, and the CA Boolean is True.
- If the Key Usage extension exists, at least keyCertSign and CRLSign are asserted.
- If the certificate is not a self-signing certificate, the system looks for the issuer's CA certificate to verify that this certificate is signed by issuer's CA. If there is no such CA profile configured, the system proceeds with a warning message.
- If the certificate is not a self-signing certificate, the system looks for the issuer's CA Certificate Revocation List (CRL) to verify that it has not been revoked. If there is no CA profile configured or there is no CRL, the system proceeds with a warning message.

If any of the preceding checks fail, the **no shutdown** command fails.

Changing or removing the **cert-file** is allowed only when the **ca-profile** is in a **shutdown** state.

The **no** form of this command removes the filename from the configuration.

## Default

no cert-file

## Parameters

**filename**

Specifies a local compact flash file URL, up to 95 characters in length.

## crl-file

## Syntax

**crl-file** *filename*

**no crl-file**

## Context

config>system>security>pki>ca-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the name of a file as the CRL file of the CA profile and saves it in the cf1:\system-pki\crl directory.

When a **no shutdown** command is issued, the system checks the following against the configured **crl-file**:

- A valid **cert-file** of the **ca-profile** is already configured.
- The configured **crl-file** is a DER-formatted CRLv2 file.
- All mandatory fields defined in section 5.1 of RFC 5280 exist and conform to the RFC 5280 defined format.
- The version field has a value of 0x1.
- The delta CRL Indicator does not exist (delta CRL is not supported).

- The CRL signature is verified by using the **cert-file** of the **ca-profile**.

If any of the preceding checks fail, the **no shutdown** command fails.

Changing or removing the **crl-file** is allowed only when the **ca-profile** is in a **shutdown** state.

The **no** form of this command removes the filename from the configuration.

## Default

no crl-file

## Parameters

### *filename*

Specifies the name of the CRL file stored in the `cf1:\system-pki\crl` directory, up to 95 characters in length.

## revocation-check

## Syntax

**revocation-check** {crl | crl-optional}

## Context

config>system>security>pki>ca-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the revocation method the system uses to check the revocation status of certificate issued by the CA. If the **crl-optional** option is configured, when the user enables the **ca-profile**, the system tries to load the configured CRL (specified by the **crl-file** command in the **ca-profile**). However, if the system fails to load the configured CRL for the following reasons, the system still brings the **ca-profile** operationally up, but leaves the CRL configured as non-existent:

- CRL file does not exist
- CRL is not properly encoded - maybe due to interrupted file transfer
- CRL does not match cert
- wrong CRL version
- CRL expired



### Note:

The **crl-optional** command option makes configuration of a valid CRL in a **ca-profile** optional. However, from a security point of view, it is important to always verify the revocation status of a certificate.

If the system needs to use the CRL of a specific CA profile to check the revocation status of an end-entity certificate, and the CRL is non-existent due to the preceding reasons, the system treats a case like this as being unable to get an answer from CRL and falls back to the next status verify method or default result.

If the system needs to check the revocation of a CA certificate in a certificate chain, and if the CRL is non-existent because of the preceding reasons, the system skips checking the revocation status of the CA certificate. For example, if CA1 is issued by CA2, if the revocation-check for CA2 is **crl-optional** and the CRL for CA2 is non-existent, the system does not check the certificate revocation status of CA1 and it is considered as "good".



**Note:**

Users must shutdown the **ca-profile** to change the **revocation-check** configuration.

## Default

revocation-check crl

## Parameters

### crl

Keyword to specify to use the configured CRL.

### crl-optional

Keyword to specify that the CRL is optional..

## shutdown

## Syntax

[no] shutdown

## Context

config>system>security>pki>ca-profile

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command disables the CA profile. The system verifies the configured **cert-file** and **crl-file**. If the verification fails, the **no shutdown** command fails.

A **ca-profile** that is in a **shutdown** state cannot be used in certificate authentication.

The **no** form of this command enables the CA profile.

## Default

shutdown

## certificate-display-format

### Syntax

**certificate-display-format** {*ascii* | *utf8*}

### Context

config>system>security>pki

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command specifies the display format used for the certificates and CRLs.

### Default

certificate-display-format *ascii*

### Parameters

#### **ascii**

Keyword to specify the ASCII format for the certificates and CRLs.

#### **utf8**

Keyword to specify the UTF8 format for the certificates and CRLs.

## certificate-expiration-warning

### Syntax

**certificate-expiration-warning** *hours* [*repeat repeat-hours*]

**no certificate-expiration-warning**

### Context

config>system>security>pki

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

With this command configured, the system issues two types of warnings related to certificate expiration:

- **BeforeExp** — A warning message issued before certificate expire
- **AfterExp** — A warning message issued when certificate expire



This command specifies when system will issue **BeforeExp** message before a certificate expires. For example, with **certificate-expiration-warning 5**, the system will issue a **BeforeExp** message 5 hours before a certificate expires. An optional **repeat <repeat-hour>** parameter will enable the system to repeat the **BeforeExp** message every hour until the certificate expires.

If the user only wants **AfterExp**, then **certificate-expiration-warning 0** can be used to achieve this.

**BeforeExp** and **AfterExp** warnings can be cleared in following cases:

- The certificate is reloaded by the **admin certificate reload** command. In this case, if the reloaded file is not expired, then **AfterExp** is cleared. And, if the reloaded file is outside of configured warning window, then the **BeforeExp** is also cleared.
- When the **ca-profile/ipsec-gw/ipsec-tunnel/cert-profile** is shutdown, then **BeforeExp** and **AfterExp** of corresponding certificates are cleared.
- When **no certificate-expiration-warning** command is configured, then all existing **BeforeExp** and **AfterExp** are cleared.
- Users may change the configuration of the **certificate-expiration-warning** so that certain certificates are no longer in the warning window. **BeforeExp** of corresponding certificates are cleared.
- If the system time changes so that the new time causes the certificates to no longer be in the warning window, then **BeforeExp** is cleared. If the new time causes an expired certificate to come non-expired, then **AfterExp** is cleared.

The **no** form of this command removes the issuing of warnings from the system.

## Default

no certificate-expiration-warning

## Parameters

*hours*

Specifies the amount of time before a certificate expires when the system issues a **BeforeExp** message.

**Values** 0 to 8760

*repeat-hours*

Specifies the time interval for the system to repeat the **BeforeExp** message.

**Values** 0 to 8760

## crl-expiration-warning

## Syntax

**crl-expiration-warning** *hours* [**repeat** *repeat-hours*]

**no** **crl-expiration-warning**

## Context

config>system>security>pki

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies when the system issues **BeforeExp** message before a CRL expires; for example, if **certificate-expiration-warning 5** is configured, the system issues a **BeforeExp** message 5 hours before a CRL expires. An optional **repeat repeat-hours** parameter enables the system to repeat the **BeforeExp** message every hour until the CRL expires.

To issue only the **AfterExp** warning message, configure the **certificate-expiration-warning** command with a value of "0".

See the **certificate-expiration-warning** command for information about the cases in which **BeforeExp** and **AfterExp** warnings can be cleared.

The **no** form of this command removes the issuing of **BeforeExp** messages from the system.

## Default

no crl-expiration-warning

## Parameters

*hours*

Specifies the amount of time before a CRL expires when the system issues **BeforeExp** messages.

**Values** 0 to 8760

*repeat-hours*

Specifies the time interval for the system to repeat the **BeforeExp** message.

**Values** 0 to 8760

## imported-format

## Syntax

**imported-format** {any | secure}

## Context

config>system>security>pki

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command specifies the allowed format of imported certificates or keys in the `cf1:/system-pki` directory.

## Default

imported-format any

## Parameters

### any

Keyword to allow any imported format.

### secure

Keyword to allow only enhanced secure imported formats.

## maximum-cert-chain-depth

## Syntax

**maximum-cert-chain-depth** *level*

## Context

config>system>security>pki

## Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

## Description

This command defines the maximum depth of certificate chain verification. This number is applied system wide.

The **no** form of this command reverts to the default value.

## Default

maximum-cert-chain-depth 7

## Parameters

### *level*

Specifies the maximum depth of certificate chain verification. The certificate under verification is not counted in the chain; for example, if this parameter is set to 1, the certificate under verification must be directly signed by the trust anchor CA.

**Values** 1 to 7

## 6.12.2 Show commands

tls

### Syntax

tls

### Context

show>system>security

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

Commands in this context display TLS-related information.

cert-profile

### Syntax

**cert-profile** *name* **association**

**cert-profile** [*name*]

**cert-profile** [*name*] **entry** *entry*

### Context

show>system>security>tls

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command displays information about server and client profiles that are using this certificate profile.

### Parameters

***name***

Specifies the name of a certificate profile, up to 32 characters in length, for which to display information.

***entry***

Specifies the certificate profile entry number for which to display information.

**Values** 1 to 8

**association**

Keyword to display users of the certificate profile.

**Output**

The following output is an example of certificate profile information, and [Table 77: Output fields: certificate profile](#) describes the output fields.

**Sample output**

```
*A:Dut-A>show>system>security>tls# cert-profile
=====
Certificate Profile
=====
Certificate Profile Name AdminState OperState OperFlags

cp up up
=====

A:Dut-A>show>system>security# tls cert-profile "cp" association
=====
TLS Client Profiles using cert-profile "cp"
=====
TLS Client Profile Name

ctpl.2
ctpl.3

Number of TLS Client Profile entries: 2
=====

A:Dut-A# show system security tls cert-profile "cp" entry 1
=====
TLS Certificate Profile: "cp" Entry: 1 Detail
=====
Certificate File : client-cert.pem
Key File : client-key.pem
Status Flags : (Not Specified)
Comp Chain : complete
Compute Chain CA Profiles

clientCA
=====
```

Table 77: Output fields: certificate profile

| Label                    | Description                           |
|--------------------------|---------------------------------------|
| Certificate Profile Name | Displays the certificate profile name |
| AdminState               | Displays the administrative state     |
| OperState                | Displays the operational state        |
| OperFlags                | Displays the operational flags        |

| Label                                | Description                                       |
|--------------------------------------|---------------------------------------------------|
| TLS Client Profile Name              | Displays the TLS client profile name              |
| Number of TLS Client Profile entries | Displays the number of TLS client profile entries |
| TLS Certificate Profile              | Displays the TLS certificate profile name         |
| Entry                                | Displays the certificate profile entry number     |
| Certificate File                     | Displays the certificate file name                |
| Key File                             | Displays the key file name                        |
| Status Flags                         | Displays the status flags                         |
| Comp Chain                           | Displays the comp chain                           |

## client-tls-profile

### Syntax

**client-tls-profile** [*client-tls-profile*]

**client-tls-profile** *client-tls-profile* **connections**

### Context

show>system>security>tls

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command displays TLS client profile information.

### Parameters

***client-tls-profile***

Specifies the client TLS profile name, up to 32 characters.

**connections**

Keyword to display connections that use the TLS client profile.

### Output

The following output is an example of certificate profile information, and [Table 78: Output fields: TLS client profile](#) describes the output fields.

Sample output

```
A:Dut-A>show>system>security# tls client-tls-profile
=====
Client Profile Information
=====
Name AdminState OperState

ctp1.2 up up
ctp1.3 up up
=====

*A:Dut-A>show>system>security# tls client-tls-profile "ctp1.3" connections
=====
Active TLS connections using client-tls-profile "ctp1.3"
=====
 Cipher Matched Trust Anchor
 Server IP

Syslog
1 TLS_AES_128_GCM_SHA256 CA1
100.120.224.167:6514

Number of TLS connections: 1
=====
```

Table 78: Output fields: TLS client profile

| Label                     | Description                            |
|---------------------------|----------------------------------------|
| Name                      | Displays the client TLS profile name   |
| AdminState                | Displays the administrative state      |
| OperState                 | Displays the operational state         |
| Cipher                    | Displays the cipher                    |
| Server IP                 | Displays the server IP address         |
| Matched Trust Anchor      | Displays the matched trust anchor name |
| Syslog                    | Displays the syslog information        |
| Number of TLS connections | Displays the number of TLS connections |

trust-anchor-profile

Syntax

**trust-anchor-profile** *trust-anchor-profile* **association**  
**trust-anchor-profile** [*trust-anchor-profile*]

Context

show>system>security>tls

Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

Description

This command displays TLS trust anchor profile information.

Parameters

trust-anchor-profile

Specifies the TLS trust anchor profile name, up to 32 characters.

association

Keyword to display trust anchor profile users.

Output

The following output is an example of certificate profile information, and [Table 79: Output fields: TLS trust anchor profile](#) describes the output fields.

Sample output

```
*A:Dut-A# show system security tls trust-anchor-profile
=====
Trust Anchor Profile Information
=====
Name CA Profiles Down

TA 0
=====

*A:Dut-A# show system security tls trust-anchor-profile "TA"
=====
CA-profile List for Trust Anchor "TA"
=====
CA Profile Name AdminState OperState

CA1 up up
=====
```

Table 79: Output fields: TLS trust anchor profile

| Label            | Description                                       |
|------------------|---------------------------------------------------|
| Name             | Displays the TLS trust anchor profile name        |
| CA Profiles Down | Displays the number of operation down CA profiles |
| CA Profile Name  | Displays CA profile name                          |
| AdminState       | Displays the administrative state                 |



| Label     | Description                    |
|-----------|--------------------------------|
| OperState | Displays the operational state |

## ca-profile

### Syntax

**ca-profile**  
**ca-profile auto-crl-update**  
**ca-profile** *name* [association]

### Context

show>certificate

### Platforms

Supported on all 7210 SAS platforms as described in this document, except the 7210 SAS-D

### Description

This command displays CA profile information.

### Parameters

- auto-crl-update**  
Keyword to display the CA profiles with the automated CRL update configured.
- name**  
Specifies the CA profile name, up to 32 characters.
- association**  
Keyword to display CA profile users.

### Output

The following output is an example of certificate profile information, and [Table 80: Output fields: CA profile](#) describes the output fields.

#### Sample output

```
*A:Dut-A# show certificate ca-profile

Max Cert Chain Depth: 7 (default)

Certificate Display Format: 1 ASCII

Time Frames For Expiry Warning Generation Before:
Certificate Expiry Warning : 10 Hours Repeat Interval : 2 Hours
CRL Expiry Warning : 10 Hours Repeat Interval : 4 Hours

=====
CA Profile
=====
```

| CA Profile                                   | Admin State | Oper State | Cert File           | CRL File            |
|----------------------------------------------|-------------|------------|---------------------|---------------------|
| CA1                                          | up          | up         | cacert.pem          | cacrl.pem           |
| clientCA                                     | up          | up         | CaRsaeClientCrt.pem | CaRsaeClientCrl.pem |
| Entries found: 2                             |             |            |                     |                     |
| =====                                        |             |            |                     |                     |
| *A:Dut-A#                                    |             |            |                     |                     |
| show certificate ca-profile "ca" association |             |            |                     |                     |
| =====                                        |             |            |                     |                     |
| CA-Profile Associations                      |             |            |                     |                     |
| =====                                        |             |            |                     |                     |
| Associated TLS Trust Anchor Profiles         |             |            |                     |                     |
| -----                                        |             |            |                     |                     |
| Profile Name                                 |             |            |                     |                     |
| -----                                        |             |            |                     |                     |
| ta                                           |             |            |                     |                     |
| -----                                        |             |            |                     |                     |
| TLS Trust Anchor Profiles: 1                 |             |            |                     |                     |
| -----                                        |             |            |                     |                     |
| =====                                        |             |            |                     |                     |

Table 80: Output fields: CA profile

| Label                      | Description                                                 |
|----------------------------|-------------------------------------------------------------|
| Max Cert Chain Depth       | Displays the maximum certificate chain depth                |
| Certificate Display Format | Displays the certificate display format                     |
| Certificate Expiry Warning | Displays the time before the certificate expiration warning |
| CRL Expiry Warning         | Displays the time before the CRL expiration warning         |
| Repeat Interval            | Displays time of the repeat interval for the warning        |
| CA Profile                 | Displays the CA profile name                                |
| Admin State                | Displays the administrative state                           |
| Oper State                 | Displays the operational state                              |
| Cert File                  | Displays the certificate file name                          |
| CRL File                   | Displays the CRL filer name                                 |
| Profile Name               | Displays the CA profile name                                |
| TLS Trust Anchor Profiles  | Displays the number of TLS trust anchor profiles            |

## 7 Facility alarms

This chapter provides information about configuring event and accounting logs in the system.

### 7.1 Facility alarms overview

Facility Alarms provide a useful tool for operators to easily track and display the basic status of their equipment facilities.

CLI display (show routines) allows the system operator to easily identify current facility alarm conditions and recently cleared alarms without searching event logs or monitoring various card and port show commands to determine the health of managed objects in the system such as cards and ports.

The 7210 SAS alarm model is based on RFC 3877, *Alarm Management Information Base (MIB)*, (which evolved from the IETF DISMAN drafts).


### 7.2 Facility alarms vs. log events

Facility Alarms are different from log events. Events are a single point in time and are generally stateless. Facility Alarms have a state (at least two states: active and clear) and duration and can be modeled with state transition events (raised, cleared).

The Facility Alarms module processes log events to generate the raised and cleared state for the alarms. If a raising log event is suppressed under event-control, the associated Alarm is not raised. If a clearing log event is suppressed under event-control, then it is still processed for the purpose of clearing the associated alarm. Log event filtering, throttling and discarding of events during overload do not affect Facility Alarm processing. Log events are processed by the Facility Alarm module before they are discarded in all cases.

The following figure shows the relationship of log events, alarms and the LEDs.

Figure 11: Log events, alarms and LEDs

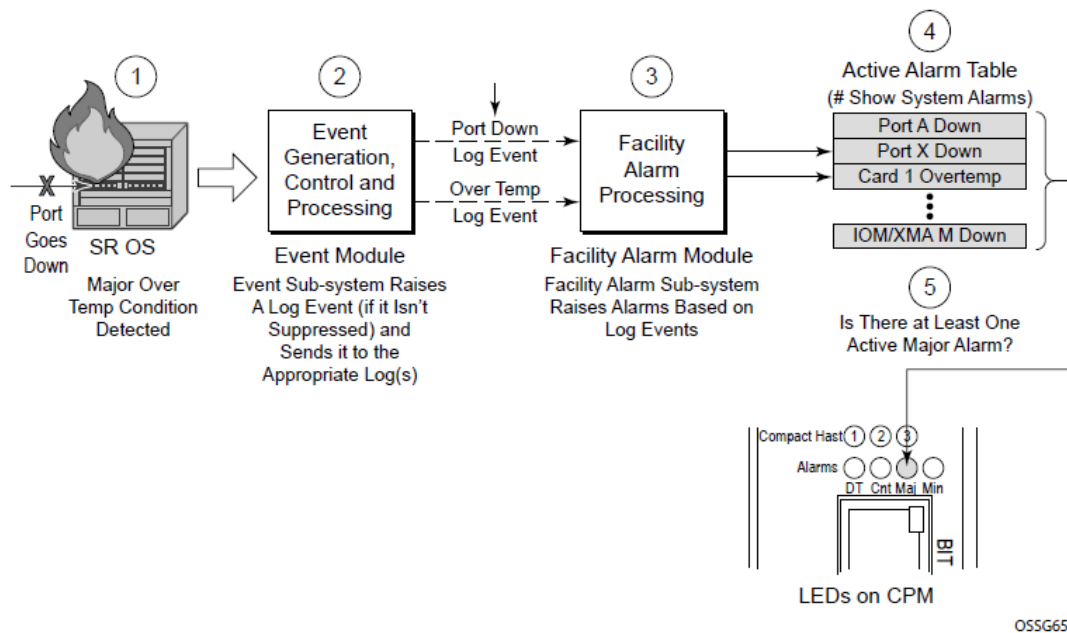

**Note:**

Some of the 7210 SAS platforms do not have Critical, Major, and Minor LEDs and Alarm Output pins. On these platforms, an event is raised and only a log is generated.

Facility Alarms have independent functionality from other uses of the term "alarm" in the 7210 SAS software such as:

- **configure port ethernet report-alarm**
- **configure system thresholds no memory-use-alarm**
- **configure system thresholds rmon no alarm**

## 7.3 Facility alarm severities and alarm LED behavior

The Alarm LEDs on the CPM/CCM reflects the current status of the Facility Alarms:

- The Critical Alarm LED (if available on the 7210 SAS platform), is lit if there is 1 or more active Critical Facility Alarms.
- Similarly with the Major and Minor alarm LEDs (if available on the 7210 SAS platform).
- The OT Alarm LED (if available on the 7210 SAS platform), is not controlled by the Facility Alarm module.

The supported alarm severities are as follows:

- Critical (with an associated LED)
- Major (with an associated LED)
- Minor (with an associated LED)

- Warning (no LED)

Alarms inherit their severity from the raising event.

Log events that are a raising event for a facility alarm configured with a severity of **indeterminate** or **cleared** result in those alarms not being raised (but clearing events are processed to clear alarms regardless of the severity of the clearing event).

Changing the severity of a raising event only affects subsequent occurrences of that event and alarms. Alarms that are already raised when their raising event severity is changed maintain their original severity.

## 7.4 Facility alarm hierarchy

Facility Alarms for children objects are not raised for the failure of a parent object. For example, when port fails (or is shut down) there is not a set of port alarms raised.

When a parent alarm is cleared, children alarms that are still in occurrence on the node appear in the active alarms list. For example, when a port fails there is a port alarm, but if the port is later shut down the port alarm is cleared (and a card alarm is active). If the card comes back into service, and the port is still down, a port alarm becomes active again.

The supported Facility Alarm hierarchy is as follows (parent objects that are down cause alarms in all children to be masked):

- CPM → Compact Flash
- IOM/IMM → MDA → Port → Channel

Note that a masked alarm is not the same as a cleared alarm. The cleared alarm queue does not display entries for previously raised alarms that are currently masked. If the masking event goes away, the previously raised alarms are again be visible in the active alarm queue.

## 7.5 Facility alarm list

The following tables list the supported Facility Alarms.

Table 81: Facility alarms

| Alarm    | Alarm name/<br>raising event | Details string<br>example                                                | Clearing<br>event                    | 7210 SAS devices |              |                                                                        |
|----------|------------------------------|--------------------------------------------------------------------------|--------------------------------------|------------------|--------------|------------------------------------------------------------------------|
|          |                              |                                                                          |                                      | 7210 SAS-D       | 7210 SAS-Dxp | 7210 SAS-K<br>2F1C2T<br>7210 SAS-K<br>2F6C4T<br>7210 SAS-K<br>3SFP+ 8C |
| 7-2001-1 | tmnxEqCard<br>Failure        | Class MDA<br>Module:<br>failed, reason:<br>MDA 1 failed<br>startup tests | tmnxChassis<br>Notification<br>Clear |                  |              |                                                                        |

| Alarm    | Alarm name/<br>raising event        | Details string<br>example                               | Clearing<br>event                           | 7210 SAS devices |                  |                                                                        |
|----------|-------------------------------------|---------------------------------------------------------|---------------------------------------------|------------------|------------------|------------------------------------------------------------------------|
|          |                                     |                                                         |                                             | 7210 SAS-D       | 7210 SAS-<br>Dxp | 7210 SAS-K<br>2F1C2T<br>7210 SAS-K<br>2F6C4T<br>7210 SAS-K<br>3SFP+ 8C |
| 7-2003-1 | tmnxEqCard<br>Removed               | Class CPM<br>Module:<br>removed                         | tmnxEqCard<br>Inserted                      |                  |                  | ✓                                                                      |
| 7-2004-1 | tmnxEqWrong<br>Card                 | Class IOM<br>Module:<br>wrong type<br>inserted          | tmnxChassis<br>Notification<br>Clear        |                  |                  |                                                                        |
| 7-2005-1 | tmnxEnvTemp<br>TooHigh              | Chassis 1:<br>temperature<br>too high                   | tmnxChassis<br>Notification<br>Clear        | ✓                | ✓                | ✓                                                                      |
| 7-2006-1 | tmnxEqFan<br>Failure                | Fan 1 failed                                            | tmnxChassis<br>Notification<br>Clear        |                  |                  |                                                                        |
| 7-2007-1 | tmnxEqPower<br>SupplyFailure<br>Ovt | Power<br>supply 2 over<br>temperature                   | tmnxChassis<br>Notification<br>Clear        |                  |                  |                                                                        |
| 7-2008-1 | tmnxEqPower<br>SupplyFailure<br>Ac  | Power supply<br>1 AC failure                            | tmnxChassis<br>Notification<br>Clear        |                  |                  |                                                                        |
| 7-2009-1 | tmnxEqPower<br>SupplyFailure<br>Dc  | Power supply<br>2 DC failure                            | tmnxChassis<br>Notification<br>Clear        | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  |                                                                        |
| 7-2011-1 | tmnxEqPower<br>Supply<br>Removed    | Power supply<br>1, power lost                           | tmnxEqPower<br>Supply<br>Inserted           |                  |                  |                                                                        |
| 7-2017-1 | tmnxEqSync<br>IfTiming<br>Holdover  | Synchronous<br>Timing<br>interface in<br>holdover state | tmnxEqSync<br>IfTiming<br>Holdover<br>Clear | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  | ✓                                                                      |
| 7-2019-1 | tmnxEqSync<br>IfTiming<br>Ref1Alarm | Synchronous<br>Timing<br>interface,                     | tmnxEqSync<br>IfTiming                      | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  | ✓                                                                      |

<sup>11</sup> ETR variant only

| Alarm    | Alarm name/<br>raising event                                                                                  | Details string<br>example                                               | Clearing<br>event                                  | 7210 SAS devices |                  |                                                                        |
|----------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|----------------------------------------------------|------------------|------------------|------------------------------------------------------------------------|
|          |                                                                                                               |                                                                         |                                                    | 7210 SAS-D       | 7210 SAS-<br>Dxp | 7210 SAS-K<br>2F1C2T<br>7210 SAS-K<br>2F6C4T<br>7210 SAS-K<br>3SFP+ 8C |
|          | with attribute<br>tmnxSync<br>IfTimingNotify<br>Alarm ==<br>'los(1)'                                          | alarm los on<br>reference 1                                             | Ref1Alarm<br>Clear                                 |                  |                  |                                                                        |
| 7-2019-2 | tmnxEqSync<br>IfTiming<br>Ref1Alarm<br>with attribute<br>tmnxSync<br>IfTimingNotify<br>Alarm ==<br>'oof(2)'   | Synchronous<br>Timing<br>interface,<br>alarm of on<br>reference 1       | same as 7-<br>2019-1                               | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  | ✓                                                                      |
| 7-2019-3 | tmnxEqSync<br>IfTiming<br>Ref1Alarm<br>with attribute<br>tmnxSync<br>IfTimingNotify<br>Alarm ==<br>'oopir(3)' | Synchronous<br>Timing<br>interface,<br>alarm oopir<br>on reference<br>1 | same as 7-<br>2019-1                               | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  | ✓                                                                      |
| 7-2021-x | same as 7-<br>2019-x but for<br>ref2                                                                          | same as 7-<br>2019-x but for<br>ref2                                    | same as 7-<br>2019-x but for<br>ref2               | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  | ✓                                                                      |
| 7-2030-x | same as 7-<br>2019-x but<br>for the BITS1<br>input                                                            | same as 7-<br>2019-x but<br>for the BITS1<br>input                      | same as 7-<br>2019-x but<br>for the BITS1<br>input |                  |                  |                                                                        |
| 7-2033-1 | tmnxChassis<br>Upgrade<br>InProgress                                                                          | Class CPM<br>Module:<br>software<br>upgrade in<br>progress              | tmnxChassis<br>Upgrade<br>Complete                 |                  |                  |                                                                        |
| 7-2050-1 | tmnxEqPower<br>SupplyFailure<br>Input                                                                         | Power supply<br>1 input failure                                         | tmnxChassis<br>Notification<br>Clear               | ✓ <sup>11</sup>  | ✓ <sup>11</sup>  |                                                                        |

| Alarm    | Alarm name/<br>raising event                       | Details string<br>example                                    | Clearing<br>event                                  | 7210 SAS devices |                  |                                                                        |
|----------|----------------------------------------------------|--------------------------------------------------------------|----------------------------------------------------|------------------|------------------|------------------------------------------------------------------------|
|          |                                                    |                                                              |                                                    | 7210 SAS-D       | 7210 SAS-<br>Dxp | 7210 SAS-K<br>2F1C2T<br>7210 SAS-K<br>2F6C4T<br>7210 SAS-K<br>3SFP+ 8C |
| 7-2051-1 | tmnxEqPower<br>SupplyFailure<br>Output             | Power supply<br>1 output<br>failure                          | tmnxChassis<br>Notification<br>Clear               |                  |                  | ✓ <sup>11</sup>                                                        |
| 7-2073-x | same as 7-<br>2019-x but<br>for the BITS2<br>input | same as 7-<br>2019-x but<br>for the BITS2<br>input           | same as 7-<br>2019-x but<br>for the BITS2<br>input |                  |                  |                                                                        |
| 3-2004-1 | linkDown                                           | Interface intf-<br>toward-node-<br>B22 is not<br>operational | linkUp                                             | ✓                | ✓                | ✓                                                                      |

The following table lists linkDown Facility Alarm support for the following objects; objects may not be supported on all platforms.

Table 82: linkDown Facility Alarm support

| Object         | Supported? |
|----------------|------------|
| Ethernet Ports | Yes        |
| Ethernet LAGs  | No         |
| Ethernet VLANs | No         |

## 7.6 Configuring logging with CLI

This section provides information to configure logging using the command line interface.

### 7.6.1 Basic facility alarm configuration

The facility alarm configuration must have the following:

- log ID or accounting policy ID
- a log source
- a log destination



### Example: Alarm configuration

```
*7210SAS>config>system>alarms# info detail

 no shutdown
 exit

*7210SAS>config>system>alarms#
```

## 7.6.2 Common configuration tasks

The following sections are basic alarm tasks that can be performed.

### 7.6.2.1 Configuring the maximum number of alarms to clear

The number of alarms to clear can be configured using the following command.

Use the following syntax to configure a log file.

```
config>system
 alarms
 max-cleared max-alarms
```

### Example: Facility alarm configuration

```
ALA-12>config>system# alarms

...
max-cleared 500
exit
...

```

## 7.7 Facility alarms command reference

### 7.7.1 Command hierarchies

- [Facility alarm configuration commands](#)
- [Show commands](#)

#### 7.7.1.1 Facility alarm configuration commands

```
config
- system
 - alarms
 - max-cleared max-alarms
 - [no] shutdown
```

## 7.7.1.2 Show commands

```
show
- system
- alarms [cleared] [severity severity-level] [count count] [newer-than days]
```

## 7.7.2 Command descriptions

### 7.7.2.1 Configuration commands

#### alarms

##### Syntax

**alarms**

##### Context

config>system

##### Platforms

Supported on all 7210 SAS platforms as described in this document

##### Description

Commands in this context configure facility alarm parameters.

#### max-cleared

##### Syntax

**max-cleared max-alarms**

##### Context

config>system>alarms

##### Platforms

Supported on all 7210 SAS platforms as described in this document

##### Description

This command configures the maximum number of cleared alarms that the system stores and displays.

## Default

500

## Parameters

### *max-alarms*

Specifies the maximum number of cleared alarms.

**Value** 0 to 500

## shutdown

## Syntax

[no] shutdown

## Context

config>system>alarms

## Platforms

Supported on all 7210 SAS platforms as described in this document

## Description

This command enables or disables the Facility Alarm functionality. When enabled, the Facility Alarm subsystem tracks active and cleared facility alarms and controls the Alarm LEDs on the CPMs/CFMs. When Facility Alarm functionality is enabled, the alarms are viewed using the show system alarms commands,



### **Note:**

Shutting down the system alarms clears all the existing alarms (raised and cleared). The user performing **no shutdown** will not bring back the earlier raised alarm.

## Default

no shutdown

## 7.7.2.2 Show commands

## alarms

## Syntax

alarms [cleared] [severity *severity-level*] [count *count*] [newer-than *days*]

## Context

show>system

Platforms

Supported on all 7210 SAS platforms as described in this document

Description

This command displays facility alarms on the system.

Output

The following output is an example of facility alarms information, and [Table 83: Output fields: alarms](#) describes the output fields.

Sample output

```
*A:7210SAS# show system alarms

=====
Alarms [Critical:1 Major:2 Minor:0 Warning:0 Total:3]
=====
Index Date/Time Severity Alarm Resource
 Details

13 2014/11/13 14:34:39.20 MAJOR 7-2005-1 Chassis 1
 Chassis: Temperature too high

12 2014/11/13 14:34:13.70 MAJOR 7-3002-1 Alarm Input Module 2
 Alarm Input "Pin 2" ("2") has changed status to "alarm"
 "Alarm Input
 Triggered"

11 2014/11/13 14:32:37.00 CRITICAL 7-3001-1 Alarm Input Module 1
 Alarm Input "Pin 1" ("1") has changed status to "alarm"
 "Alarm Input
 Triggered"
=====
*A:7210SAS#

Cleared alarms table:

A:Dut-A# show system alarms cleared

=====
Cleared Alarms [Size:500 Total:5 (not wrapped)]
=====
Index Date/Time Severity Alarm Resource
 Details

5 2011/04/01 18:11:55.00 MAJOR 7-2005-1 Chassis 1
 Clear Chassis temperature too high alarm

3 2011/04/01 18:11:54.50 CRITICAL 7-2051-1 Power Supply 1
 Clear Power Supply failure

2 2011/04/01 18:11:54.40 CRITICAL 7-2050-1 Power Supply 1
 Clear Power Supply failure

4 2011/04/01 18:11:54.10 MINOR 7-2004-1 Fan 1
 Clear Fan wrong type failure

1 2011/04/01 18:11:54.00 CRITICAL 7-2007-1 Power Supply 1
 Clear Power Supply failure
=====
```

Table 83: Output fields: alarms

| Label     | Description                        |
|-----------|------------------------------------|
| Index     | Alarm index number                 |
| Date/Time | Date and time string for the alarm |
| Severity  | Severity level of the alarm        |
| Alarm     | Alarm identifier                   |
| Resource  | Facility associated with the alarm |
| Details   | Description of the alarm           |

## 8 Appendix: accounting record name details for 7210 SAS platforms

This chapter provides information about accounting record name details for the 7210 SAS platforms.

### 8.1 Accounting record name details for 7210 SAS-D

The following table lists the accounting policy record names and statistics on the 7210 SAS-D.

Table 84: Accounting record name details for 7210 SAS-D

| Record name                                                              | Sub-record | Field       | Field description           |
|--------------------------------------------------------------------------|------------|-------------|-----------------------------|
| service-ingress-octets<br>(counter mode is <b>in-out-profile-count</b> ) | sio        | (Per Meter) | (Per Meter)                 |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | mId         | MeterId                     |
|                                                                          |            | iof         | InProfileOctetsForwarded    |
|                                                                          |            | oof         | OutOfProfileOctetsForwarded |
|                                                                          |            | (Per SAP)   | (Per SAP)                   |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | ioo         | IngressOctetsOffered        |
| service-ingress-octets<br>(counter mode is <b>forward-drop-count</b> )   | sio        | (Per Meter) | (Per Meter)                 |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | mId         | MeterId                     |
|                                                                          |            | of          | OctetsForwarded             |
|                                                                          |            | od          | OctetsDropped               |
|                                                                          |            | (Per SAP)   | (Per SAP)                   |
|                                                                          |            | svc         | SvcId                       |

| Record name                                                               | Sub-record | Field                  | Field description         |
|---------------------------------------------------------------------------|------------|------------------------|---------------------------|
|                                                                           |            | sap                    | SapId                     |
|                                                                           |            | ioo                    | IngressOctetsOffered      |
| service-egress-octets                                                     | seo        | (Per SAP)              | (Per SAP)                 |
|                                                                           |            | svc                    | SvcId                     |
|                                                                           |            | sap                    | SapId                     |
|                                                                           |            | eof                    | EgressOctetsForwarded     |
|                                                                           |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)    |
|                                                                           |            | mId                    | Egress Meter ID           |
|                                                                           |            | of                     | OctetsForwarded           |
|                                                                           |            | od                     | OctetsDropped             |
| service-ingress-packets<br>(counter mode is <b>in-out-profile-count</b> ) | sip        | (Per Meter)            | (Per Meter)               |
|                                                                           |            | svc                    | SvcId                     |
|                                                                           |            | sap                    | SapId                     |
|                                                                           |            | mId                    | MeterId                   |
|                                                                           |            | ipf                    | InProfilePktsForwarded    |
|                                                                           |            | opf                    | OutOfProfilePktsForwarded |
|                                                                           |            | (Per SAP)              | (Per SAP)                 |
|                                                                           |            | svc                    | SvcId                     |
|                                                                           |            | sap                    | SapId                     |
|                                                                           |            | ipo                    | IngressPktsOffered        |
| service-ingress-packets<br>(counter mode is <b>forward-drop-count</b> )   | sip        | (Per Meter)            | (Per Meter)               |
|                                                                           |            | svc                    | SvcId                     |
|                                                                           |            | sap                    | SapId                     |
|                                                                           |            | mId                    | MeterId                   |
|                                                                           |            | pf                     | PacketsForwarded          |
|                                                                           |            | pd                     | PacketsDropped            |

<sup>12</sup> The per-SAP egress meter record has additional fields only when SAP aggregate meter is in use.

| Record name                                                                | Sub-record | Field                  | Field description           |
|----------------------------------------------------------------------------|------------|------------------------|-----------------------------|
|                                                                            |            | (Per SAP)              | (Per SAP)                   |
|                                                                            |            | svc                    | SvcId                       |
|                                                                            |            | sap                    | SapId                       |
|                                                                            |            | ipo                    | IngressPktsOffered          |
| service-egress-packets <sup>12</sup>                                       | sep        | (Per SAP)              | (Per SAP)                   |
|                                                                            |            | svc                    | SvcId                       |
|                                                                            |            | sap                    | SapId                       |
|                                                                            |            | epf                    | EgressPktsForwarded         |
|                                                                            |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)      |
|                                                                            |            | mId                    | Egress Meter ID             |
|                                                                            |            | pf                     | PktsForwarded               |
|                                                                            |            | pd                     | PktsDropped                 |
| combined-service-ingress<br>(counter mode is <b>in-out-profile-count</b> ) | sio, sip   | (Per Meter)            | (Per Meter)                 |
|                                                                            |            | svc                    | SvcId                       |
|                                                                            |            | sap                    | SapId                       |
|                                                                            |            | mId                    | MeterId                     |
|                                                                            |            | iof                    | InProfileOctetsForwarded    |
|                                                                            |            | oof                    | OutOfProfileOctetsForwarded |
|                                                                            |            | ipf                    | InProfilePktsForwarded      |
|                                                                            |            | opf                    | OutOfProfilePktsForwarded   |
|                                                                            | seo, sep   | (Per SAP)              | (Per SAP)                   |
|                                                                            |            | svc                    | SvcId                       |
|                                                                            |            | sap                    | SapId                       |
|                                                                            |            | ioo                    | IngressOctetsOffered        |
| combined-service-ingress<br>(counter mode is <b>forward-drop-count</b> )   | sip, sio   | (Per Meter)            | (Per Meter)                 |
|                                                                            |            | svc                    | SvcId                       |



| Record name                                                                                  | Sub-record | Field                  | Field description        |
|----------------------------------------------------------------------------------------------|------------|------------------------|--------------------------|
|                                                                                              |            | sap                    | SapId                    |
|                                                                                              |            | mId                    | MeterId                  |
|                                                                                              |            | pf                     | PacketsForwarded         |
|                                                                                              |            | pd                     | PacketsDropped           |
|                                                                                              |            | of                     | OctetsForwarded          |
|                                                                                              |            | od                     | OctetsDropped            |
|                                                                                              |            | (Per SAP)              | (Per SAP)                |
|                                                                                              |            | svc                    | SvcId                    |
|                                                                                              |            | sap                    | SapId                    |
|                                                                                              |            | ipo                    | IngressPktsOffered       |
|                                                                                              |            | ioo                    | IngressOctetsOffered     |
| combined-service-egress <sup>12</sup>                                                        | seo, sep   | (Per SAP)              | (per SAP)                |
|                                                                                              |            | svc                    | SvcId                    |
|                                                                                              |            | sap                    | SapId                    |
|                                                                                              |            | ioo                    | IngressOctetsOffered     |
|                                                                                              |            | ipo                    | IngressPktsOffered       |
|                                                                                              |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)   |
|                                                                                              |            | mId                    | Egress Meter ID          |
|                                                                                              |            | of                     | OctetsForwarded          |
|                                                                                              |            | od                     | OctetsDropped            |
|                                                                                              |            | pf                     | PktsForwarded            |
|                                                                                              |            | pd                     | PktsDropped              |
| complete-service-ingress-egress (counter mode is <b>in-out-profile-count</b> ) <sup>12</sup> | sio, sip   | (Per Meter)            | (Per Meter)              |
|                                                                                              |            | svc                    | SvcId                    |
|                                                                                              |            | sap                    | SapId                    |
|                                                                                              |            | mId                    | MeterId                  |
|                                                                                              |            | iof                    | InProfileOctetsForwarded |

| Record name                                                                                | Sub-record | Field                  | Field description         |
|--------------------------------------------------------------------------------------------|------------|------------------------|---------------------------|
|                                                                                            |            | oof                    | OutProfileOctetsForwarded |
|                                                                                            |            | ipf                    | InProfilePktsFORwarded    |
|                                                                                            |            | opf                    | OutOfProfilePktsForwarded |
|                                                                                            |            | (Per SAP)              | (Per SAP)                 |
|                                                                                            |            | svc                    | SvcId                     |
|                                                                                            |            | sap                    | SapId                     |
|                                                                                            |            | ioo                    | IngressOctetsOffered      |
|                                                                                            |            | ipo                    | IngressPktsOffered        |
|                                                                                            | seo, sep   | (Per SAP)              | (Per SAP)                 |
|                                                                                            |            | svc                    | SvcId                     |
|                                                                                            |            | sap                    | SapId                     |
|                                                                                            |            | eof                    | EgressOctetsForwarded     |
|                                                                                            |            | epf                    | EgressPktsForwarded       |
|                                                                                            |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)    |
|                                                                                            |            | mId                    | Egress Meter ID           |
|                                                                                            |            | of                     | OctetsForwarded           |
|                                                                                            |            | od                     | OctetsDropped             |
|                                                                                            |            | pf                     | PktsForwarded             |
|                                                                                            |            | pd                     | PktsDropped               |
| complete-service-ingress-egress (counter mode is <b>forward-drop-count</b> ) <sup>12</sup> | sip sio    | (Per Meter)            | (Per Meter)               |
|                                                                                            |            | svc                    | SvcId                     |
|                                                                                            |            | sap                    | SapId                     |
|                                                                                            |            | mId                    | MeterId                   |
|                                                                                            |            | pf                     | PacketsForwarded          |
|                                                                                            |            | pd                     | PacketsDropped            |
|                                                                                            |            | of                     | OctetsForwarded           |
|                                                                                            |            | od                     | OctetsDropped             |

| Record name            | Sub-record   | Field                  | Field description      |
|------------------------|--------------|------------------------|------------------------|
|                        |              | (Per SAP)              | (Per SAP)              |
|                        |              | svc                    | SvcId                  |
|                        |              | sap                    | SapId                  |
|                        |              | ipo                    | IngressPktsOffered     |
|                        |              | ioo                    | IngressOctetsOffered   |
|                        |              | (Per SAP)              | (Per SAP)              |
|                        |              | svc                    | SvcId                  |
|                        |              | sap                    | SapId                  |
|                        |              | eof                    | EgressOctetsForwarded  |
|                        |              | epf                    | EgressPktsForwarded    |
|                        |              | (Per SAP Egress Meter) | (Per SAP Egress Meter) |
|                        |              | mId                    | Egress Meter ID        |
|                        |              | of                     | OctetsForwarded        |
|                        |              | od                     | OctetsDropped          |
|                        |              | pf                     | PktsForwarded          |
|                        |              | pd                     | PktsDropped            |
| access-egress-octets   | aoe          | (Per Queue)            | (Per Queue)            |
|                        |              | port                   | PortId                 |
|                        |              | qId                    | QueueId                |
|                        |              | of                     | OctetsForwarded        |
|                        |              | od                     | OctetsDropped          |
| access-egress-packets  | aep          | (Per Queue)            | (Per Queue)            |
|                        |              | port                   | PortId                 |
|                        |              | qId                    | QueueId                |
|                        |              | pf                     | PktsForwarded          |
|                        |              | pd                     | PktsDropped            |
| combined-access-egress | cmAeo, cmAep | (Per Queue)            | (Per Queue)            |

| Record name             | Sub-record   | Field       | Field description         |
|-------------------------|--------------|-------------|---------------------------|
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | of          | OctetsForawrded           |
|                         |              | pf          | PktsForwarded             |
|                         |              | pd          | PktsDropped               |
|                         |              | od          | OctetsDropped             |
| network-ingress-octets  | nio          | (Per Meter) | (Per Meter)               |
|                         |              | port        | PortId                    |
|                         |              | mld         | MeterId                   |
|                         |              | iof         | InProfileOctetsForwarded  |
|                         |              | oof         | OutProfileOctetsForwarded |
| network-ingress-packets | nip          | (Per Meter) | (Per Meter)               |
|                         |              | port        | PortId                    |
|                         |              | mld         | MeterId                   |
|                         |              | ipf         | InProfilePktsForwarded    |
|                         |              | opf         | OutProfilePktsForwarded   |
| network-egress-octets   | neo          | (Per Queue) | (Per Queue)               |
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | of          | OctetsForwarded           |
|                         |              | od          | Octets Dropped            |
| network-egress-packets  | nep          | (Per Queue) | (Per Queue)               |
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | pf          | PktsForwarded             |
|                         |              | pd          | PktsDropped               |
| combined-network-egress | cmNeo, cmNep | (Per Queue) | (Per Queue)               |

| Record name                     | Sub-record   | Field       | Field description           |
|---------------------------------|--------------|-------------|-----------------------------|
|                                 |              | port        | PortId                      |
|                                 |              | qld         | QueueId                     |
|                                 |              | of          | OctetsForwarded             |
|                                 |              | pf          | PktsForwarded               |
|                                 |              | pd          | PktsDropped                 |
|                                 |              | od          | Octets Dropped              |
| combined-network-ing-egr-octets | cmNio, cmNeo | (Per Meter) | (Per Meter)                 |
|                                 |              | port        | PortId                      |
|                                 |              | mld         | MeterId                     |
|                                 |              | iof         | InProfileOctetsForwarded    |
|                                 |              | oof         | OutOfProfileOctetsForwarded |
|                                 |              | (Per Queue) | (Per Queue)                 |
|                                 |              | port        | PortId                      |
|                                 |              | qld         | QueueId                     |
|                                 |              | of          | OctetsForwarded             |
|                                 |              | od          | Octets Dropped              |

## 8.2 Accounting record name details for 7210 SAS-Dxp

The following table lists the accounting policy record names and statistics on the 7210 SAS-Dxp.

Table 85: Accounting record name details for 7210 SAS-Dxp

| Record name                                                              | Sub-record | Field       | Field description           |
|--------------------------------------------------------------------------|------------|-------------|-----------------------------|
| service-ingress-octets<br>(counter mode is <b>in-out-profile-count</b> ) | sio        | (Per Meter) | (Per Meter)                 |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | mld         | MeterId                     |
|                                                                          |            | iof         | InProfileOctetsForwarded    |
|                                                                          |            | oof         | OutOfProfileOctetsForwarded |

| Record name                                                               | Sub-record | Field                  | Field description      |
|---------------------------------------------------------------------------|------------|------------------------|------------------------|
|                                                                           |            | (Per SAP)              | (Per SAP)              |
|                                                                           |            | svc                    | SvcId                  |
|                                                                           |            | sap                    | SapId                  |
|                                                                           |            | ioo                    | IngressOctetsOffered   |
| service-ingress-octets<br>(counter mode is <b>forward-drop-count</b> )    | sio        | (Per Meter)            | (Per Meter)            |
|                                                                           |            | svc                    | SvcId                  |
|                                                                           |            | sap                    | SapId                  |
|                                                                           |            | mId                    | MeterId                |
|                                                                           |            | of                     | OctetsForwarded        |
|                                                                           |            | od                     | OctetsDropped          |
|                                                                           |            | (Per SAP)              | (Per SAP)              |
|                                                                           |            | svc                    | SvcId                  |
|                                                                           |            | sap                    | SapId                  |
|                                                                           |            | ioo                    | IngressOctetsOffered   |
| service-egress-octets                                                     | seo        | (Per SAP)              | (Per SAP)              |
|                                                                           |            | svc                    | SvcId                  |
|                                                                           |            | sap                    | SapId                  |
|                                                                           |            | eof                    | EgressOctetsForwarded  |
|                                                                           |            | (Per SAP Egress Meter) | (Per SAP Egress Meter) |
|                                                                           |            | mId                    | Egress Meter ID        |
|                                                                           |            | of                     | OctetsForwarded        |
|                                                                           |            | od                     | OctetsDropped          |
| service-ingress-packets<br>(counter mode is <b>in-out-profile-count</b> ) | sip        | (Per Meter)            | (Per Meter)            |
|                                                                           |            | svc                    | SvcId                  |
|                                                                           |            | sap                    | SapId                  |
|                                                                           |            | mId                    | MeterId                |

<sup>13</sup> The per-SAP egress meter record has additional fields only when SAP aggregate meter is in use.

| Record name                                                                | Sub-record | Field                  | Field description         |
|----------------------------------------------------------------------------|------------|------------------------|---------------------------|
|                                                                            |            | ipf                    | InProfilePktsForwarded    |
|                                                                            |            | opf                    | OutOfProfilePktsForwarded |
|                                                                            |            | (Per SAP)              | (Per SAP)                 |
|                                                                            |            | svc                    | SvcId                     |
|                                                                            |            | sap                    | SapId                     |
|                                                                            |            | ipo                    | IngressPktsOffered        |
| service-ingress-packets<br>(counter mode is <b>forward-drop-count</b> )    | sip        | (Per Meter)            | (Per Meter)               |
|                                                                            |            | svc                    | SvcId                     |
|                                                                            |            | sap                    | SapId                     |
|                                                                            |            | mId                    | MeterId                   |
|                                                                            |            | pf                     | PacketsForwarded          |
|                                                                            |            | pd                     | PacketsDropped            |
|                                                                            |            | (Per SAP)              | (Per SAP)                 |
|                                                                            |            | svc                    | SvcId                     |
|                                                                            |            | sap                    | SapId                     |
|                                                                            |            | ipo                    | IngressPktsOffered        |
| service-egress-packets <sup>13</sup>                                       | sep        | (Per SAP)              | (Per SAP)                 |
|                                                                            |            | svc                    | SvcId                     |
|                                                                            |            | sap                    | SapId                     |
|                                                                            |            | epf                    | EgressPktsForwarded       |
|                                                                            |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)    |
|                                                                            |            | mId                    | Egress Meter ID           |
|                                                                            |            | pf                     | PktsForwarded             |
|                                                                            |            | pd                     | PktsDropped               |
| combined-service-ingress<br>(counter mode is <b>in-out-profile-count</b> ) | sio, sip   | (Per Meter)            | (Per Meter)               |
|                                                                            |            | svc                    | SvcId                     |
|                                                                            |            | sap                    | SapId                     |

| Record name                                                              | Sub-record | Field       | Field description           |
|--------------------------------------------------------------------------|------------|-------------|-----------------------------|
|                                                                          |            | mld         | MeterId                     |
|                                                                          |            | iof         | InProfileOctetsForwarded    |
|                                                                          |            | oof         | OutOfProfileOctetsForwarded |
|                                                                          |            | ipf         | InProfilePktsForwarded      |
|                                                                          |            | opf         | OutOfProfilePktsForwarded   |
|                                                                          |            | (Per SAP)   | (Per SAP)                   |
|                                                                          | seo, sep   | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | ioo         | IngressOctetsOffered        |
|                                                                          |            | ipo         | IngressPktsOffered          |
| combined-service-ingress<br>(counter mode is <b>forward-drop-count</b> ) | sip, sio   | (Per Meter) | (Per Meter)                 |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | mld         | MeterId                     |
|                                                                          |            | pf          | PacketsForwarded            |
|                                                                          |            | pd          | PacketsDropped              |
|                                                                          |            | of          | OctetsForwarded             |
|                                                                          |            | od          | OctetsDropped               |
|                                                                          |            | (Per SAP)   | (Per SAP)                   |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | ipo         | IngressPktsOffered          |
|                                                                          |            | ioo         | IngressOctetsOffered        |
| combined-service-egress <sup>13</sup>                                    | seo, sep   | (Per SAP)   | (per SAP)                   |
|                                                                          |            | svc         | SvcId                       |
|                                                                          |            | sap         | SapId                       |
|                                                                          |            | eof         | EgressOctetsForwarded       |



| Record name                                                                                  | Sub-record | Field                  | Field description         |
|----------------------------------------------------------------------------------------------|------------|------------------------|---------------------------|
|                                                                                              |            | epf                    | EgressPktsForwarded       |
|                                                                                              |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)    |
|                                                                                              |            | mld                    | Egress Meter ID           |
|                                                                                              |            | of                     | OctetsForwarded           |
|                                                                                              |            | od                     | OctetsDropped             |
|                                                                                              |            | pf                     | PktsForwarded             |
|                                                                                              |            | pd                     | PktsDropped               |
| complete-service-ingress-egress (counter mode is <b>in-out-profile-count</b> ) <sup>13</sup> | sio, sip   | (Per Meter)            | (Per Meter)               |
|                                                                                              |            | svc                    | SvcId                     |
|                                                                                              |            | sap                    | SapId                     |
|                                                                                              |            | mld                    | MeterId                   |
|                                                                                              |            | iof                    | InProfileOctetsForwarded  |
|                                                                                              |            | oof                    | OutProfileOctetsForwarded |
|                                                                                              |            | ipf                    | InProfilePktsForwarded    |
|                                                                                              |            | opf                    | OutOfProfilePktsForwarded |
|                                                                                              |            | (Per SAP)              | (Per SAP)                 |
|                                                                                              |            | svc                    | SvcId                     |
|                                                                                              |            | sap                    | SapId                     |
|                                                                                              |            | ioo                    | IngressOctetsOffered      |
|                                                                                              |            | ipo                    | IngressPktsOffered        |
|                                                                                              | seo, sep   | (Per SAP)              | (Per SAP)                 |
|                                                                                              |            | svc                    | SvcId                     |
|                                                                                              |            | sap                    | SapId                     |
|                                                                                              |            | eof                    | EgressOctetsForwarded     |
|                                                                                              |            | epf                    | EgressPktsForwarded       |
|                                                                                              |            | (Per SAP Egress Meter) | (Per SAP Egress Meter)    |

| Record name                                                                                | Sub-record | Field                  | Field description      |
|--------------------------------------------------------------------------------------------|------------|------------------------|------------------------|
|                                                                                            |            | mld                    | Egress Meter ID        |
|                                                                                            |            | of                     | OctetsForwarded        |
|                                                                                            |            | od                     | OctetsDropped          |
|                                                                                            |            | pf                     | PktsForwarded          |
|                                                                                            |            | pd                     | PktsDropped            |
| complete-service-ingress-egress (counter mode is <b>forward-drop-count</b> ) <sup>13</sup> | sip, sio   | (Per Meter)            | (Per Meter)            |
|                                                                                            |            | svc                    | SvcId                  |
|                                                                                            |            | sap                    | SapId                  |
|                                                                                            |            | mld                    | MeterId                |
|                                                                                            |            | pf                     | PacketsForwarded       |
|                                                                                            |            | pd                     | PacketsDropped         |
|                                                                                            |            | of                     | OctetsForwarded        |
|                                                                                            |            | od                     | OctetsDropped          |
|                                                                                            |            | (Per SAP)              | (Per SAP)              |
|                                                                                            |            | svc                    | SvcId                  |
|                                                                                            |            | sap                    | SapId                  |
|                                                                                            |            | ipo                    | IngressPktsOffered     |
|                                                                                            |            | ioo                    | IngressOctetsOffered   |
|                                                                                            |            | (Per SAP)              | (Per SAP)              |
|                                                                                            |            | svc                    | SvcId                  |
|                                                                                            |            | sap                    | SapId                  |
|                                                                                            |            | eof                    | EgressOctetsForwarded  |
|                                                                                            |            | epf                    | EgressPktsForwarded    |
|                                                                                            |            | (Per SAP Egress Meter) | (Per SAP Egress Meter) |
|                                                                                            |            | mld                    | Egress Meter ID        |
|                                                                                            |            | of                     | OctetsForwarded        |
|                                                                                            |            | od                     | OctetsDropped          |

| Record name             | Sub-record   | Field       | Field description         |
|-------------------------|--------------|-------------|---------------------------|
|                         |              | pf          | PktsForwarded             |
|                         |              | pd          | PktsDropped               |
| access-egress-octets    | aoe          | (Per Queue) | (Per Queue)               |
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | of          | OctetsForwarded           |
| access-egress-packets   | aep          | (Per Port)  | (Per Port)                |
|                         |              | port        | PortId                    |
|                         |              | pd          | PktsDropped               |
|                         |              | (Per Queue) | (Per Queue)               |
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | pf          | PktsForwarded             |
| combined-access-egress  | cmAeo, cmAep | (Per Port)  | (Per Port)                |
|                         |              | port        | PortId                    |
|                         |              | pd          | PktsDropped               |
|                         |              | (Per Queue) | (Per Queue)               |
|                         |              | port        | PortId                    |
|                         |              | qld         | QueueId                   |
|                         |              | of          | OctetsForwarded           |
|                         |              | pf          | PktsForwarded             |
| network-ingress-octets  | nio          | (Per Meter) | (Per Meter)               |
|                         |              | port        | PortId                    |
|                         |              | mId         | MeterId                   |
|                         |              | iof         | InProfileOctetsForwarded  |
|                         |              | oof         | OutProfileOctetsForwarded |
| network-ingress-packets | nip          | (Per Meter) | (Per Meter)               |

| Record name                     | Sub-record   | Field       | Field description        |
|---------------------------------|--------------|-------------|--------------------------|
|                                 |              | port        | PortId                   |
|                                 |              | mld         | MeterId                  |
|                                 |              | ipf         | InProfilePktsForwarded   |
|                                 |              | opf         | OutProfilePktsForwarded  |
| network-egress-octets           | neo          | (Per Queue) | (Per Queue)              |
|                                 |              | port        | PortId                   |
|                                 |              | qld         | QueueId                  |
|                                 |              | of          | OctetsForwarded          |
| network-egress-packets          | nep          | (Per Port)  | (Per Port)               |
|                                 |              | port        | PortId                   |
|                                 |              | pd          | PktsDropped              |
|                                 |              | (Per Queue) | (Per Queue)              |
|                                 |              | port        | PortId                   |
|                                 |              | qld         | QueueId                  |
|                                 |              | pf          | PktsForwarded            |
| combined-network-egress         | cmNeo, cmNep | (Per Port)  | (Per Port)               |
|                                 |              | port        | PortId                   |
|                                 |              | pd          | PktsDropped              |
|                                 |              | (Per Queue) | (Per Queue)              |
|                                 |              | port        | PortId                   |
|                                 |              | qld         | QueueId                  |
|                                 |              | of          | OctetsForwarded          |
|                                 |              | pf          | PktsForwarded            |
| combined-network-ing-egr-octets | cmNio, cmNeo | (Per Meter) | (Per Meter)              |
|                                 |              | port        | PortId                   |
|                                 |              | mld         | MeterId                  |
|                                 |              | iof         | InProfileOctetsForwarded |

| Record name | Sub-record | Field       | Field description           |
|-------------|------------|-------------|-----------------------------|
|             |            | oof         | OutOfProfileOctetsForwarded |
|             |            | (Per Queue) | (Per Queue)                 |
|             |            | port        | PortId                      |
|             |            | qld         | QueueId                     |
|             |            | of          | OctetsForwarded             |

### 8.3 Accounting record name details for 7210 SAS-K 2F1C2T

The following table lists the accounting policy record names and statistics for 7210 SAS-K 2F1C2T.

Table 86: Accounting record details for 7210 SAS-K 2F1C2T

| Record name            | Sub-record | Field               | Field description           |
|------------------------|------------|---------------------|-----------------------------|
| service-ingress-octets | sio        | (Per Ingress queue) | (Per Ingress queue)         |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | qid                 | Queue Id                    |
|                        |            | iof                 | InProfileOctetsForwarded    |
|                        |            | oof                 | Forwarded OutProfile Octets |
|                        |            | iod                 | Dropped InProfile Octets    |
|                        |            | ood                 | Dropped OutProfile Octets   |
|                        |            | (Per SAP)           | (Per SAP)                   |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | ioo                 | IngressOctetsOffered        |
| service-egress-octets  | seo        | (Per Egress queue)  | (Per Egress queue)          |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | qid                 | Egress QueueId              |

| Record name             | Sub-record | Field               | Field description            |
|-------------------------|------------|---------------------|------------------------------|
|                         |            | iof                 | Forwarded InProfile Octets   |
|                         |            | oof                 | Forwarded OutProfile Octets  |
|                         |            | iod                 | Dropped InProfile Octets     |
|                         |            | ood                 | Dropped OutProfile Octets    |
|                         |            | (Per SAP)           | (Per SAP)                    |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | eof                 | EgressOctetsForwarded        |
| service-ingress-packets | sip        | (Per Ingress queue) | (Per Ingress queue)          |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | qid                 | Ingress QueueId              |
|                         |            | ipf                 | Forwarded InProfile Packets  |
|                         |            | opf                 | Forwarded OutProfile Packets |
|                         |            | ipd                 | Dropped InProfile Packets    |
|                         |            | opd                 | Dropped OutProfile Packets   |
|                         |            | (Per SAP)           | (Per SAP)                    |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | ipo                 | IngressPacketsOffered        |
| service-egress-packets  | sep        | (Per Egress queue)  | (Per Egress queue)           |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | qid                 | Queue Id                     |
|                         |            | ipf                 | Forwarded InProfile Packets  |
|                         |            | opf                 | Forwarded OutProfile Packets |

| Record name              | Sub-record | Field       | Field description            |
|--------------------------|------------|-------------|------------------------------|
|                          |            | ipd         | Dropped InProfile Packets    |
|                          |            | opd         | Dropped OutProfile Packets   |
|                          |            | (Per SAP)   | (Per SAP)                    |
|                          |            | svc         | Svcld                        |
|                          |            | sap         | Sapld                        |
|                          |            | epf         | EgressPacketsForwarded       |
| combined-service-ingress | sio, sip   | (Per Queue) | (Per Queue)                  |
|                          |            | svc         | Svcld                        |
|                          |            | sap         | Sapld                        |
|                          |            | qid         | Ingress QueueId              |
|                          |            | iof         | Forwarded InProfile Octets   |
|                          |            | oof         | Forwarded OutProfile Octets  |
|                          |            | iod         | Dropped InProfile Octets     |
|                          |            | ood         | Dropped OutProfile Octets    |
|                          |            | ipf         | Forwarded InProfile Packets  |
|                          |            | opf         | Forwarded OutProfile Packets |
|                          |            | ipd         | Dropped InProfile Packets    |
|                          |            | opd         | Dropped OutProfile Packets   |
|                          |            | (Per SAP)   | (Per SAP)                    |
|                          |            | svc         | Svcld                        |
|                          |            | sap         | Sapld                        |
|                          |            | ioo         | IngressOctetsOffered         |
|                          |            | ipo         | IngressPktsOffered           |
| combined-service-egress  | seo sep    | (Per Queue) | (Per Queue)                  |
|                          |            | svc         | Svcld                        |
|                          |            | sap         | Sapld                        |
|                          |            | qid         | Egress QueueId               |

| Record name                     | Sub-record | Field       | Field description            |
|---------------------------------|------------|-------------|------------------------------|
|                                 |            | iof         | Forwarded InProfile Octets   |
|                                 |            | oof         | Forwarded OutProfile Octets  |
|                                 |            | iod         | Dropped InProfile Octets     |
|                                 |            | ood         | Dropped OutProfile Octets    |
|                                 |            | ipf         | Forwarded InProfile Packets  |
|                                 |            | opf         | Forwarded OutProfile Packets |
|                                 |            | ipd         | Dropped InProfile Packets    |
|                                 |            | opd         | Dropped OutProfile Packets   |
|                                 |            | (Per SAP)   | (Per SAP)                    |
|                                 |            | svc         | SvcId                        |
|                                 |            | sap         | SapId                        |
|                                 |            | eof         | EgressOctetsForwarded        |
|                                 |            | epf         | EgressPacketsForwarded       |
| complete-service-ingress-egress | sio sip    | (Per Queue) | (Per Queue)                  |
|                                 |            | svc         | SvcId                        |
|                                 |            | sap         | SapId                        |
|                                 |            | qid         | Ingress QueueId              |
|                                 |            | iof         | Forwarded InProfile Octets   |
|                                 |            | oof         | Forwarded OutProfile Octets  |
|                                 |            | iod         | Dropped InProfile Octets     |
|                                 |            | ood         | Dropped OutProfile Octets    |
|                                 |            | ipf         | Forwarded InProfile Packets  |
|                                 |            | opf         | Forwarded OutProfile Packets |
|                                 |            | ipd         | Dropped InProfile Packets    |
|                                 |            | opd         | Dropped OutProfile Packets   |
|                                 |            | (Per SAP)   | (Per SAP)                    |
|                                 |            | svc         | SvcId                        |



| Record name                                 | Sub-record | Field       | Field description            |
|---------------------------------------------|------------|-------------|------------------------------|
|                                             |            | sap         | SapId                        |
|                                             |            | ioo         | IngressOctetsOffered         |
|                                             |            | ipo         | IngressPacketsOffered        |
| complete-service-ingress-egress (continued) | seo sep    | (Per Queue) | (Per Queue)                  |
|                                             |            | svc         | SvcId                        |
|                                             |            | sap         | SapId                        |
|                                             |            | qid         | Egress QueueId               |
|                                             |            | iof         | Forwarded InProfile Octets   |
|                                             |            | oof         | Forwarded OutProfile Octets  |
|                                             |            | iod         | Dropped InProfile Octets     |
|                                             |            | ood         | Dropped OutProfile Octets    |
|                                             |            | ipf         | Forwarded InProfile Packets  |
|                                             |            | opf         | Forwarded OutProfile Packets |
|                                             |            | ipd         | Dropped InProfile Packets    |
|                                             |            | opd         | Dropped OutProfile Packets   |
|                                             |            | (Per SAP)   | (Per SAP)                    |
|                                             |            | svc         | SvcId                        |
|                                             |            | sap         | SapId                        |
|                                             |            | eof         | EgressOctetsForwarded        |
|                                             |            | epf         | EgressPacketsForwarded       |
| network-ingress-octets                      | nio        | (Per Queue) | (Per Queue)                  |
|                                             |            | port        | PortId                       |
|                                             |            | qid         | QueueId                      |
|                                             |            | iof         | InProfileOctetsForwarded     |
|                                             |            | iod         | InprofileOctetsDropped       |
|                                             |            | oof         | OutProfileOctetsForwarded    |
|                                             |            | ood         | OutprofileOctetsDropped      |

| Record name             | Sub-record | Field       | Field description          |
|-------------------------|------------|-------------|----------------------------|
| network-egress-octets   | neo        | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | iof         | InProfileOctetsForwarded   |
|                         |            | iod         | InprofileOctetsDropped     |
|                         |            | oof         | OutProfileOctetsForwarded  |
|                         |            | ood         | OutprofileOctetsDropped    |
| network-ingress-packets | nip        | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | opd         | OutprofilePacketsDropped   |
| network-egress-packets  | nep        | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | od          | OctetsDropped              |
|                         |            | opd         | OutprofilePacketsDropped   |
| combined-network-egress | cmNeo      | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | iof         | InProfileOctetsForwarded   |
|                         |            | oof         | OutProfileOctetsForwarded  |

| Record name                     | Sub-record | Field       | Field description          |
|---------------------------------|------------|-------------|----------------------------|
|                                 |            | ood         | OutprofileOctetsDropped    |
|                                 |            | iod         | InprofileOctetsDropped     |
|                                 | cmNep      | (Per Queue) | (Per Queue)                |
|                                 |            | port        | PortId                     |
|                                 |            | qld         | QueueId                    |
|                                 |            | ipf         | InProfilePacketsForwarded  |
|                                 |            | ipd         | InprofilePacketsDropped    |
|                                 |            | opf         | OutProfilePacketsForwarded |
|                                 |            | opd         | OutprofilePacketsDropped   |
| combined-network-ing-egr-octets | cmNio      | (Per Queue) | (Per Queue)                |
|                                 |            | port        | PortId                     |
|                                 |            | qld         | QueueId                    |
|                                 |            | iof         | InProfileOctetsForwarded   |
|                                 |            | iod         | InprofileOctetsDropped     |
|                                 |            | oof         | OutProfileOctetsForwarded  |
|                                 |            | ood         | OutprofileOctetsDropped    |
|                                 | cmNeo      | (Per Queue) | (Per Queue)                |
|                                 |            | port        | PortId                     |
|                                 |            | qld         | QueueId                    |
|                                 |            | iof         | InProfileOctetsForwarded   |
|                                 |            | iod         | InprofileOctetsDropped     |
|                                 |            | oof         | OutProfileOctetsForwarded  |
|                                 |            | ood         | OutprofileOctetsDropped    |

## 8.4 Accounting record name details for 7210 SAS-K 2F6C4T

The following table lists the accounting policy record names and the statistics for the 7210 SAS-K 2F6C4T.

Table 87: Accounting record name details for 7210 SAS-K 2F6C4T

| Record name            | Sub-record | Field               | Field description           |
|------------------------|------------|---------------------|-----------------------------|
| service-ingress-octets | sio        | (Per Ingress queue) | (Per Ingress queue)         |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | qid                 | Queue Id                    |
|                        |            | iof                 | InProfileOctetsForwarded    |
|                        |            | oof                 | Forwarded OutProfile Octets |
|                        |            | iod                 | Dropped InProfile Octets    |
|                        |            | ood                 | Dropped OutProfile Octets   |
|                        |            | (Per SAP)           | (Per SAP)                   |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | ioo                 | IngressOctetsOffered        |
| service-egress-octets  | seo        | (Per Egress queue)  | (Per Egress queue)          |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | qid                 | Egress QueueId              |
|                        |            | iof                 | Forwarded InProfile Octets  |
|                        |            | oof                 | Forwarded OutProfile Octets |
|                        |            | iod                 | Dropped InProfile Octets    |
|                        |            | ood                 | Dropped OutProfile Octets   |
|                        |            | (Per SAP)           | (Per SAP)                   |
|                        |            | svc                 | SvcId                       |
|                        |            | sap                 | SapId                       |
|                        |            | eof                 | EgressOctetsForwarded       |

| Record name              | Sub-record | Field               | Field description            |
|--------------------------|------------|---------------------|------------------------------|
| service-ingress-packets  | sip        | (Per Ingress queue) | (Per Ingress queue)          |
|                          |            | svc                 | SvcId                        |
|                          |            | sap                 | SapId                        |
|                          |            | qid                 | Ingress QueueId              |
|                          |            | ipf                 | Forwarded InProfile Packets  |
|                          |            | opf                 | Forwarded OutProfile Packets |
|                          |            | ipd                 | Dropped InProfile Packets    |
|                          |            | opd                 | Dropped OutProfile Packets   |
|                          |            | (Per SAP)           | (Per SAP)                    |
|                          |            | svc                 | SvcId                        |
|                          |            | sap                 | SapId                        |
|                          |            | ipo                 | IngressPacketsOffered        |
| service-egress-packets   | sep        | (Per Egress queue)  | (Per Egress queue)           |
|                          |            | svc                 | SvcId                        |
|                          |            | sap                 | SapId                        |
|                          |            | qid                 | Queue Id                     |
|                          |            | ipf                 | Forwarded InProfile Packets  |
|                          |            | opf                 | Forwarded OutProfile Packets |
|                          |            | ipd                 | Dropped InProfile Packets    |
|                          |            | opd                 | Dropped OutProfile Packets   |
|                          |            | (Per SAP)           | (Per SAP)                    |
|                          |            | svc                 | SvcId                        |
|                          |            | sap                 | SapId                        |
|                          |            | epf                 | EgressPacketsForwarded       |
| combined-service-ingress | sio, sip   | (Per Queue)         | (Per Queue)                  |
|                          |            | svc                 | SvcId                        |

| Record name             | Sub-record | Field       | Field description            |
|-------------------------|------------|-------------|------------------------------|
|                         |            | sap         | Sapld                        |
|                         |            | qid         | Ingress QueueId              |
|                         |            | iof         | Forwarded InProfile Octets   |
|                         |            | oof         | Forwarded OutProfile Octets  |
|                         |            | iod         | Dropped InProfile Octets     |
|                         |            | ood         | Dropped OutProfile Octets    |
|                         |            | ipf         | Forwarded InProfile Packets  |
|                         |            | opf         | Forwarded OutProfile Packets |
|                         |            | ipd         | Dropped InProfile Packets    |
|                         |            | opd         | Dropped OutProfile Packets   |
|                         |            | (Per SAP)   | (Per SAP)                    |
|                         |            | svc         | Svcld                        |
|                         |            | sap         | Sapld                        |
|                         |            | ioo         | IngressOctetsOffered         |
|                         |            | ipo         | IngressPktsOffered           |
| combined-service-egress | seo sep    | (Per Queue) | (Per Queue)                  |
|                         |            | svc         | Svcld                        |
|                         |            | sap         | Sapld                        |
|                         |            | qid         | Egress QueueId               |
|                         |            | iof         | Forwarded InProfile Octets   |
|                         |            | oof         | Forwarded OutProfile Octets  |
|                         |            | iod         | Dropped InProfile Octets     |
|                         |            | ood         | Dropped OutProfile Octets    |
|                         |            | ipf         | Forwarded InProfile Packets  |
|                         |            | opf         | Forwarded OutProfile Packets |
|                         |            | ipd         | Dropped InProfile Packets    |
|                         |            | opd         | Dropped OutProfile Packets   |

| Record name                                 | Sub-record | Field       | Field description            |
|---------------------------------------------|------------|-------------|------------------------------|
|                                             |            | (Per SAP)   | (Per SAP)                    |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | eof         | EgressOctetsForwarded        |
|                                             |            | epf         | EgressPacketsForwarded       |
| complete-service-ingress-egress             | sio sip    | (Per Queue) | (Per Queue)                  |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | qid         | Ingress QueueId              |
|                                             |            | iof         | Forwarded InProfile Octets   |
|                                             |            | oof         | Forwarded OutProfile Octets  |
|                                             |            | iod         | Dropped InProfile Octets     |
|                                             |            | ood         | Dropped OutProfile Octets    |
|                                             |            | ipf         | Forwarded InProfile Packets  |
|                                             |            | opf         | Forwarded OutProfile Packets |
|                                             |            | ipd         | Dropped InProfile Packets    |
|                                             |            | opd         | Dropped OutProfile Packets   |
|                                             |            | (Per SAP)   | (Per SAP)                    |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | ioo         | IngressOctetsOffered         |
|                                             |            | ipo         | IngressPacketsOffered        |
| complete-service-ingress-egress (continued) | seo sep    | (Per Queue) | (Per Queue)                  |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | qid         | Egress QueueId               |
|                                             |            | iof         | Forwarded InProfile Octets   |

| Record name             | Sub-record | Field       | Field description            |
|-------------------------|------------|-------------|------------------------------|
|                         |            | oof         | Forwarded OutProfile Octets  |
|                         |            | iod         | Dropped InProfile Octets     |
|                         |            | ood         | Dropped OutProfile Octets    |
|                         |            | ipf         | Forwarded InProfile Packets  |
|                         |            | opf         | Forwarded OutProfile Packets |
|                         |            | ipd         | Dropped InProfile Packets    |
|                         |            | opd         | Dropped OutProfile Packets   |
|                         |            | (Per SAP)   | (Per SAP)                    |
|                         |            | svc         | SvcId                        |
|                         |            | sap         | SapId                        |
|                         |            | eof         | EgressOctetsForwarded        |
|                         |            | epf         | EgressPacketsForwarded       |
| network-ingress-octets  | nio        | (Per Queue) | (Per Queue)                  |
|                         |            | port        | PortId                       |
|                         |            | qlid        | QueueId                      |
|                         |            | iof         | InProfileOctetsForwarded     |
|                         |            | iod         | InprofileOctetsDropped       |
|                         |            | oof         | OutProfileOctetsForwarded    |
|                         |            | ood         | OutprofileOctetsDropped      |
| network-egress-octets   | neo        | (Per Queue) | (Per Queue)                  |
|                         |            | port        | PortId                       |
|                         |            | qlid        | QueueId                      |
|                         |            | iof         | InProfileOctetsForwarded     |
|                         |            | iod         | InprofileOctetsDropped       |
|                         |            | oof         | OutProfileOctetsForwarded    |
|                         |            | ood         | OutprofileOctetsDropped      |
| network-ingress-packets | nip        | (Per Queue) | (Per Queue)                  |



| Record name             | Sub-record | Field       | Field description          |
|-------------------------|------------|-------------|----------------------------|
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | opd         | OutprofilePacketsDropped   |
| network-egress-packets  | nep        | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | od          | OctetsDropped              |
|                         |            | opd         | OutprofilePacketsDropped   |
| combined-network-egress | cmNeo      | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | iof         | InProfileOctetsForwarded   |
|                         |            | oof         | OutProfileOctetsForwarded  |
|                         |            | ood         | OutprofileOctetsDropped    |
|                         |            | iod         | InprofileOctetsDropped     |
|                         | cmNep      | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |

| Record name                     | Sub-record | Field       | Field description         |
|---------------------------------|------------|-------------|---------------------------|
|                                 |            | opd         | OutprofilePacketsDropped  |
| combined-network-ing-egr-octets | cmNio      | (Per Queue) | (Per Queue)               |
|                                 |            | port        | PortId                    |
|                                 |            | qld         | QueueId                   |
|                                 |            | iof         | InProfileOctetsForwarded  |
|                                 |            | iod         | InprofileOctetsDropped    |
|                                 |            | oof         | OutProfileOctetsForwarded |
|                                 |            | ood         | OutprofileOctetsDropped   |
|                                 | cmNeo      | (Per Queue) | (Per Queue)               |
|                                 |            | port        | PortId                    |
|                                 |            | qld         | QueueId                   |
|                                 |            | iof         | InProfileOctetsForwarded  |
|                                 |            | iod         | InprofileOctetsDropped    |
|                                 |            | oof         | OutProfileOctetsForwarded |
|                                 |            | ood         | OutprofileOctetsDropped   |
| combined-sdp-ingress-egress     | cmSdpipo   | svc         | svcID                     |
|                                 |            | sdp         | sdplD                     |
|                                 |            | tpf         | TotalPacketsForwarded     |
|                                 |            | tof         | TotalOctetsForwarded      |
|                                 | cmSdpepo   | svc         | svcID                     |
|                                 |            | sdp         | sdplD                     |
|                                 |            | tpf         | TotalPacketsForwarded     |
|                                 |            | tof         | TotalOctetsForwarded      |
| complete-sdp-ingress-egress     | cmSdpipo   | svc         | svcID                     |
|                                 |            | sdp         | sdplD                     |
|                                 |            | tpf         | TotalPacketsForwarded     |
|                                 |            | tof         | TotalOctetsForwarded      |

| Record name | Sub-record | Field | Field description     |
|-------------|------------|-------|-----------------------|
|             | cmSdpepo   | svc   | svclD                 |
|             |            | sdp   | sdplD                 |
|             |            | tpf   | TotalPacketsForwarded |
|             |            | tof   | TotalOctetsForwarded  |
|             | cpSdpipo   | sdp   | sdplD                 |
|             |            | tpf   | TotalPacketsForwarded |
|             |            | tof   | TotalOctetsForwarded  |
|             | cpSdpepo   | sdp   | sdplD                 |
|             |            | tpf   | TotalPacketsForwarded |
|             |            | tof   | TotalOctetsForwarded  |

## 8.5 Accounting record name details for 7210 SAS-K 3SFP+ 8C

The following table lists the accounting policy record names and the statistics for the 7210 SAS-K 3SFP+ 8C.

Table 88: Accounting record name details for 7210 SAS-K 3SFP+ 8C

| Record name            | Sub-record | Field               | Field description           |
|------------------------|------------|---------------------|-----------------------------|
| service-ingress-octets | sio        | (Per Ingress queue) | (Per Ingress queue)         |
|                        |            | svc                 | Svcld                       |
|                        |            | sap                 | Sapld                       |
|                        |            | qid                 | Queue Id                    |
|                        |            | iof                 | InProfileOctetsForwarded    |
|                        |            | oof                 | Forwarded OutProfile Octets |
|                        |            | iod                 | Dropped InProfile Octets    |
|                        |            | ood                 | Dropped OutProfile Octets   |
|                        |            | ofio                | Offered InProfile Octets    |
|                        |            | ofoo                | Offered OutProfile Octets   |
|                        |            | (Per SAP)           | (Per SAP)                   |

| Record name             | Sub-record | Field               | Field description            |
|-------------------------|------------|---------------------|------------------------------|
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | ioo                 | IngressOctetsOffered         |
| service-egress-octets   | seo        | (Per Egress queue)  | (Per Egress queue)           |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | qid                 | Egress QueueId               |
|                         |            | iof                 | Forwarded InProfile Octets   |
|                         |            | oof                 | Forwarded OutProfile Octets  |
|                         |            | iod                 | Dropped InProfile Octets     |
|                         |            | ood                 | Dropped OutProfile Octets    |
|                         |            | (Per SAP)           | (Per SAP)                    |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | eof                 | EgressOctetsForwarded        |
| service-ingress-packets | sip        | (Per Ingress queue) | (Per Ingress queue)          |
|                         |            | svc                 | SvcId                        |
|                         |            | sap                 | SapId                        |
|                         |            | qid                 | Ingress QueueId              |
|                         |            | ipf                 | Forwarded InProfile Packets  |
|                         |            | opf                 | Forwarded OutProfile Packets |
|                         |            | ipd                 | Dropped InProfile Packets    |
|                         |            | opd                 | Dropped OutProfile Packets   |
|                         |            | ofip                | Offered InProfile Packets    |
|                         |            | ofop                | Offered OutProfile Packets   |
|                         |            | (Per SAP)           | (Per SAP)                    |

| Record name              | Sub-record | Field              | Field description            |
|--------------------------|------------|--------------------|------------------------------|
|                          |            | svc                | Svcld                        |
|                          |            | sap                | Sapld                        |
|                          |            | ipo                | IngressPacketsOffered        |
| service-egress-packets   | sep        | (Per Egress queue) | (Per Egress queue)           |
|                          |            | svc                | Svcld                        |
|                          |            | sap                | Sapld                        |
|                          |            | qid                | Queue Id                     |
|                          |            | ipf                | Forwarded InProfile Packets  |
|                          |            | opf                | Forwarded OutProfile Packets |
|                          |            | ipd                | Dropped InProfile Packets    |
|                          |            | opd                | Dropped OutProfile Packets   |
|                          |            | (Per SAP)          | (Per SAP)                    |
|                          |            | svc                | Svcld                        |
|                          |            | sap                | Sapld                        |
|                          |            | epf                | EgressPacketsForwarded       |
| combined-service-ingress | sio, sip   | (Per Queue)        | (Per Queue)                  |
|                          |            | svc                | Svcld                        |
|                          |            | sap                | Sapld                        |
|                          |            | qid                | Ingress QueueId              |
|                          |            | iof                | Forwarded InProfile Octets   |
|                          |            | oof                | Forwarded OutProfile Octets  |
|                          |            | iod                | Dropped InProfile Octets     |
|                          |            | ood                | Dropped OutProfile Octets    |
|                          |            | ofio               | Offered InProfile Octets     |
|                          |            | ofoo               | Offered OutProfile Octets    |
|                          |            | ipf                | Forwarded InProfile Packets  |
|                          |            | opf                | Forwarded OutProfile Packets |

| Record name                     | Sub-record | Field       | Field description            |
|---------------------------------|------------|-------------|------------------------------|
|                                 |            | ipd         | Dropped InProfile Packets    |
|                                 |            | opd         | Dropped OutProfile Packets   |
|                                 |            | ofip        | Offered InProfile Packets    |
|                                 |            | ofop        | Offered OutProfile Packets   |
|                                 |            | (Per SAP)   | (Per SAP)                    |
|                                 |            | svc         | SvcId                        |
|                                 |            | sap         | SapId                        |
|                                 |            | ioo         | IngressOctetsOffered         |
|                                 |            | ipo         | IngressPktsOffered           |
| combined-service-egress         | seo sep    | (Per Queue) | (Per Queue)                  |
|                                 |            | svc         | SvcId                        |
|                                 |            | sap         | SapId                        |
|                                 |            | qid         | Egress QueueId               |
|                                 |            | iof         | Forwarded InProfile Octets   |
|                                 |            | oof         | Forwarded OutProfile Octets  |
|                                 |            | iod         | Dropped InProfile Octets     |
|                                 |            | ood         | Dropped OutProfile Octets    |
|                                 |            | ipf         | Forwarded InProfile Packets  |
|                                 |            | opf         | Forwarded OutProfile Packets |
|                                 |            | ipd         | Dropped InProfile Packets    |
|                                 |            | opd         | Dropped OutProfile Packets   |
|                                 |            | (Per SAP)   | (Per SAP)                    |
|                                 |            | svc         | SvcId                        |
|                                 |            | sap         | SapId                        |
|                                 |            | eof         | EgressOctetsForwarded        |
|                                 |            | epf         | EgressPacketsForwarded       |
| complete-service-ingress-egress | sio sip    | (Per Queue) | (Per Queue)                  |

| Record name                                 | Sub-record | Field       | Field description            |
|---------------------------------------------|------------|-------------|------------------------------|
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | qid         | Ingress QueueId              |
|                                             |            | iof         | Forwarded InProfile Octets   |
|                                             |            | oof         | Forwarded OutProfile Octets  |
|                                             |            | iod         | Dropped InProfile Octets     |
|                                             |            | ood         | Dropped OutProfile Octets    |
|                                             |            | ofio        | Offered InProfile Octets     |
|                                             |            | ofoo        | Offered OutProfile Octets    |
|                                             |            | ipf         | Forwarded InProfile Packets  |
|                                             |            | opf         | Forwarded OutProfile Packets |
|                                             |            | ipd         | Dropped InProfile Packets    |
|                                             |            | opd         | Dropped OutProfile Packets   |
|                                             |            | ofip        | Offered InProfile Packets    |
|                                             |            | ofop        | Offered OutProfile Packets   |
|                                             |            | (Per SAP)   | (Per SAP)                    |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | ioo         | IngressOctetsOffered         |
|                                             |            | ipo         | IngressPacketsOffered        |
| complete-service-ingress-egress (continued) | seo sep    | (Per Queue) | (Per Queue)                  |
|                                             |            | svc         | Svcld                        |
|                                             |            | sap         | Sapld                        |
|                                             |            | qid         | Egress QueueId               |
|                                             |            | iof         | Forwarded InProfile Octets   |
|                                             |            | oof         | Forwarded OutProfile Octets  |
|                                             |            | iod         | Dropped InProfile Octets     |

| Record name             | Sub-record | Field       | Field description            |
|-------------------------|------------|-------------|------------------------------|
|                         |            | ood         | Dropped OutProfile Octets    |
|                         |            | ipf         | Forwarded InProfile Packets  |
|                         |            | opf         | Forwarded OutProfile Packets |
|                         |            | ipd         | Dropped InProfile Packets    |
|                         |            | opd         | Dropped OutProfile Packets   |
|                         |            | (Per SAP)   | (Per SAP)                    |
|                         |            | svc         | SvcId                        |
|                         |            | sap         | SapId                        |
|                         |            | eof         | EgressOctetsForwarded        |
|                         |            | epf         | EgressPacketsForwarded       |
| network-ingress-octets  | nio        | (Per Queue) | (Per Queue)                  |
|                         |            | port        | PortId                       |
|                         |            | qlid        | QueueId                      |
|                         |            | iof         | InProfileOctetsForwarded     |
|                         |            | iod         | InprofileOctetsDropped       |
|                         |            | oof         | OutProfileOctetsForwarded    |
|                         |            | ood         | OutprofileOctetsDropped      |
|                         |            | ofio        | Offered InProfile Octets     |
|                         |            | ofoo        | Offered OutProfile Octets    |
| network-egress-octets   | neo        | (Per Queue) | (Per Queue)                  |
|                         |            | port        | PortId                       |
|                         |            | qlid        | QueueId                      |
|                         |            | iof         | InProfileOctetsForwarded     |
|                         |            | iod         | InprofileOctetsDropped       |
|                         |            | oof         | OutProfileOctetsForwarded    |
|                         |            | ood         | OutprofileOctetsDropped      |
| network-ingress-packets | nip        | (Per Queue) | (Per Queue)                  |



| Record name             | Sub-record | Field       | Field description          |
|-------------------------|------------|-------------|----------------------------|
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | opd         | OutprofilePacketsDropped   |
|                         |            | ofip        | Offered InProfile Packets  |
|                         |            | ofop        | Offered OutProfile Packets |
| network-egress-packets  | nep        | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |
|                         |            | ipd         | InprofilePacketsDropped    |
|                         |            | opf         | OutProfilePacketsForwarded |
|                         |            | od          | OctetsDropped              |
|                         |            | opd         | OutprofilePacketsDropped   |
| combined-network-egress | cmNeo      | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | iof         | InProfileOctetsForwarded   |
|                         |            | oof         | OutProfileOctetsForwarded  |
|                         |            | ood         | OutprofileOctetsDropped    |
|                         |            | iod         | InprofileOctetsDropped     |
|                         | cmNep      | (Per Queue) | (Per Queue)                |
|                         |            | port        | PortId                     |
|                         |            | qld         | QueueId                    |
|                         |            | ipf         | InProfilePacketsForwarded  |

| Record name                     | Sub-record | Field       | Field description          |
|---------------------------------|------------|-------------|----------------------------|
|                                 |            | ipd         | InprofilePacketsDropped    |
|                                 |            | opf         | OutProfilePacketsForwarded |
|                                 |            | opd         | OutprofilePacketsDropped   |
| combined-network-ing-egr-octets | cmNio      | (Per Queue) | (Per Queue)                |
|                                 |            | port        | PortId                     |
|                                 |            | qld         | QueueId                    |
|                                 |            | iof         | InProfileOctetsForwarded   |
|                                 |            | iod         | InprofileOctetsDropped     |
|                                 |            | oof         | OutProfileOctetsForwarded  |
|                                 |            | ood         | OutprofileOctetsDropped    |
|                                 |            | ofio        | Offered InProfile Octets   |
|                                 |            | ofoo        | Offered OutProfile Octets  |
|                                 | cmNeo      | (Per Queue) | (Per Queue)                |
|                                 |            | port        | PortId                     |
|                                 |            | qld         | QueueId                    |
|                                 |            | iof         | InProfileOctetsForwarded   |
|                                 |            | iod         | InprofileOctetsDropped     |
|                                 |            | oof         | OutProfileOctetsForwarded  |
|                                 |            | ood         | OutprofileOctetsDropped    |
| combined-sdp-ingress egress     | cmSdpipo   | svc         | svcID                      |
|                                 |            | sdp         | sdplD                      |
|                                 |            | tpf         | TotalPacketsForwarded      |
|                                 |            | tof         | TotalOctetsForwarded       |
|                                 | cmSdpepo   | svc         | svcID                      |
|                                 |            | sdp         | sdplD                      |
|                                 |            | tpf         | TotalPacketsForwarded      |
|                                 |            | tof         | TotalOctetsForwarded       |

| Record name                 | Sub-record | Field | Field description     |
|-----------------------------|------------|-------|-----------------------|
| complete-sdp-ingress-egress | cmSdpipo   | svc   | svcID                 |
|                             |            | sdp   | sdplD                 |
|                             |            | tpf   | TotalPacketsForwarded |
|                             |            | tof   | TotalOctetsForwarded  |
|                             | cmSdpepo   | svc   | svcID                 |
|                             |            | sdp   | sdplD                 |
|                             |            | tpf   | TotalPacketsForwarded |
|                             |            | tof   | TotalOctetsForwarded  |
|                             | cpSdpipo   | sdp   | sdplD                 |
|                             |            | tpf   | TotalPacketsForwarded |
|                             |            | tof   | TotalOctetsForwarded  |
|                             | cpSdpepo   | sdp   | sdplD                 |
|                             |            | tpf   | TotalPacketsForwarded |
|                             |            | tof   | TotalOctetsForwarded  |

## 9 Standards and protocol support



**Note:**

The information provided in this chapter is subject to change without notice and may not apply to all platforms.

Nokia assumes no responsibility for inaccuracies.

The following conventions are used in this section:

- T(A,N) indicates 7210 SAS-T in both Access-uplink mode and Network mode. Similarly, T(N) indicates 7210 SAS-T in network mode only.
- K5 indicates 7210 SAS-K 2F2T1C.
- K12 indicates 7210 SAS-K 2F4T6C.
- K30 indicates 7210 SAS-K 3SFP+ 8C.
- Sx/S-1/10GE indicates all variants of 7210 SAS-Sx 1/10GE and 7210 SAS-S 1/10GE platforms.
- Sx-10/100GE indicates only the variants of 7210 SAS-Sx 10/100GE. Sx-10/100GE QSFP28 indicates the 7210 SAS-Sx 10/100GE 64 SFP+ 4QSFP28 variant.
- Sx/S-1/10GE-VC indicates 7210 SAS-Sx 1/10GE and 7210 SAS-S 1/10GE platforms in standalone VC mode.
- R6 indicates 7210 SAS-R6.
- R12 indicates 7210 SAS-R12.
- D indicates 7210 SAS-D and 7210 SAS-D ETR. If a line item applies only to 7210 SAS-D ETR, then it is indicated as D-ETR.
- Dxp indicates 7210 SAS-Dxp-12p (2SFP+ 4F6T) 7210 SAS-Dxp-12p ETR (2SFP+ 4F6T), 7210 SAS-Dxp 16p (2SFP+ 4F10T), and 7210 SAS-Dxp-24p (2SFP+ 6F16T). If a line item applies only to a particular variant, the variant name will be called out explicitly against that item.
- This standards list is not applicable to platforms in the satellite mode of operation, as most of the features are supported on 7x50 SR platforms. For this reason, the host platforms standards compliance must be consulted for the satellite mode of operation.

### 9.1 BGP

draft-ietf-idr-add-paths-04, Advertisement of Multiple Paths in BGP is supported on T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

draft-ietf-sidr-origin-validation-signaling-04, BGP Prefix Origin Validation State Extended Community is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1772, Application of the Border Gateway Protocol in the Internet is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1997, BGP Communities Attribute is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2385, Protection of BGP Sessions via the TCP MD5 Signature Option is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2439, BGP Route Flap Damping is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2545, Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing is supported on K12, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2858, Multiprotocol Extensions for BGP-4 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2918, Route Refresh Capability for BGP-4 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3107, Carrying Label Information in BGP-4 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3392, Capabilities Advertisement with BGP-4 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4271, A Border Gateway Protocol 4 (BGP-4) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4360, BGP Extended Communities Attribute is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4364, BGP/MPLS IP Virtual Private Networks (VPNs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4456, BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only R6 and R12 supports RR server functionality. Rest of the platforms support only client function.

RFC 4659, BGP/MPLS IP Virtual Private Network (VPN) Extension for IPv6 VPN is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4684, Constrained Route Distribution for Border Gateway Protocol/MultiProtocol Label Switching (BGP/MPLS) Internet Protocol (IP) Virtual Private Networks (VPNs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4760, Multiprotocol Extensions for BGP-4 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4798, Connecting IPv6 Islands over IPv4 MPLS Using IPv6 Provider Edge Routers (6PE) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4893, BGP Support for Four-octet AS Number Space is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5004, Avoid BGP Best Path Transitions from One External to Another is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5291, Outbound Route Filtering Capability for BGP-4 is supported on K12, K30, T(N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5668, 4-Octet AS Specific BGP Extended Community is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6811, Prefix Origin Validation is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.2 Certificate Management

RFC 5280, Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 7468, Textual Encodings of PKIX, PKCS, and CMS Structures is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only PKIX and PKCS is supported.

## 9.3 Ethernet

IEEE 802.1AB, Station and Media Access Control Connectivity Discovery is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

TIA-1057, LLDP for Media endpoint devices is supported on Dxp, Sx/S-1/10GE, and Sx/S-1/10GE-VC

IEEE 802.1ad, Provider Bridges is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1ag, Connectivity Fault Management is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1ah, Provider Backbone Bridges is supported on T(N)

IEEE 802.1ax, Link Aggregation is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1D, MAC Bridges is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1p, Traffic Class Expediting is supported on D, E, Dxp, K5, K12, K30, T(A,N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1Q, Virtual LANs is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1s, Multiple Spanning Trees is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1w, Rapid Reconfiguration of Spanning Tree is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.1X, Port Based Network Access Control is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ab, 1000BASE-T is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ac, VLAN Tag is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ad, Link Aggregation is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ae, 10 Gb/s Ethernet is supported on Dxp, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ah, Ethernet in the First Mile is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3ba, 40 Gb/s and 100 Gb/s Ethernet is supported on R6, R12, and Sx-10/100GE

IEEE 802.3i, Ethernet is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3u, Fast Ethernet is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3z, Gigabit Ethernet is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE 802.3af, Power Over Ethernet (PoE) is supported on Dxp, T-ETR, Mxp-ETR, Sx/S-1/10GE, and Sx/S-1/10GE-VC



**Note:**

Sx/S-1/10GE only on PoE variant and Sx-1/10GE fiber variant with two fixed copper ports. Only on Dxp-16p and Dxp-24p.

IEEE 802.3at, Power Over Ethernet (PoE+) is supported on Dxp, T-ETR, Mxp-ETR, Sx/S-1/10GE, and Sx/S-1/10GE-VC



**Note:**

Sx/S-1/10GE only on PoE variant and Sx-1/10GE fiber variant with two fixed copper ports. Only on Dxp-16p and Dxp-24p.

IEEE 802.3bt, Power Over Ethernet (PoE++/HPoE) is supported on Dxp



**Note:**

Only on Dxp-16p and Dxp-24p.

ITU-T G.8032, Ethernet Ring Protection Switching is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

ITU-T Y.1731, OAM functions and mechanisms for Ethernet based networks is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.4 EVPN

draft-snr-bess-evpn-proxy-arp-nd-00, Proxy-ARP/ND function in EVPN networks is supported on K12, K30, Mxp, Sx/S-1/10GE, R6, and R12



**Note:**

Sx/S-1/10GE standalone mode only.

RFC 7432, BGP MPLS-Based Ethernet VPN is supported on K12, K30, Mxp, Sx/S-1/10GE, R6, and R12



**Note:**

Sx/S-/10GE standalone mode only.

draft-ietf-bess-evpn-vpws-14, Virtual Private Wire Service support in Ethernet VPN is supported on Mxp

## 9.5 Fast Reroute

draft-ietf-rtgwg-lfa-manageability-08, Operational management of Loop Free Alternates is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

With Segment Routing.

RFC 5286, Basic Specification for IP Fast Reroute: Loop-Free Alternates is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

With Segment Routing.

RFC 7490, Remote Loop-Free Alternate (LFA) Fast Reroute (FRR) is supported on K12, K30, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

With Segment Routing.

## 9.6 Internet Protocol (IP) — General

draft-grant-tacacs-02, The TACACS+ Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-rrp-unified-spec-02, Virtual Router Redundancy Protocol Version 3 for IPv4 and IPv6 is supported on Mxp

RFC 768, User Datagram Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 793, Transmission Control Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 854, TELNET Protocol Specifications is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 951, Bootstrap Protocol (BOOTP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1034, Domain Names - Concepts and Facilities is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1035, Domain Names - Implementation and Specification is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1350, The TFTP Protocol (revision 2) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



RFC 1534, Interoperation between DHCP and BOOTP is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1542, Clarifications and Extensions for the Bootstrap Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2131, Dynamic Host Configuration Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2132, DHCP Options and BOOTP Vendor Extensions is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2347, TFTP Option Extension is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2348, TFTP Blocksize Option is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2349, TFTP Timeout Interval and Transfer Size Options is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2428, FTP Extensions for IPv6 and NATs is supported on D, Dxp, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2865, Remote Authentication Dial In User Service (RADIUS) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2866, RADIUS Accounting is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3046, DHCP Relay Agent Information Option (Option 82) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3596, DNS Extensions to Support IP version 6 is supported on D, Dxp, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3768, Virtual Router Redundancy Protocol (VRRP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4250, The Secure Shell (SSH) Protocol Assigned Numbers is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4251, The Secure Shell (SSH) Protocol Architecture is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4252, The Secure Shell (SSH) Authentication Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

All 7210 platforms support password and public key based user authentication. 7210 SAS-D support only password based authentication.

RFC 4253, The Secure Shell (SSH) Transport Layer Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4254, The Secure Shell (SSH) Connection Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5246, The Transport Layer Security (TLS) Protocol Version 1.2 – TLS client, RSA public key is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only TLS client.

RFC 5425, Transport Layer Security (TLS) Transport Mapping for Syslog – RFC 3164 with TLS is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only TLS client.

RFC 5656, Elliptic Curve Algorithm Integration in the Secure Shell Transport Layer – ECDSA is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 7301, Transport Layer Security (TLS) Application Layer Protocol Negotiation Extension is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only TLS client.

RFC 8446, The Transport Layer Security (TLS) Protocol Version 1.3 is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only TLS client.

RFC 4632, Classless Inter-domain Routing (CIDR): The Internet Address Assignment and Aggregation Plan is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5880, Bidirectional Forwarding Detection (BFD) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

IPv4 only on all platforms listed. IPv4 and IPv6 only on Mxp.

RFC 5881, Bidirectional Forwarding Detection (BFD) IPv4 and IPv6 (Single Hop) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

IPv4 only on all platforms listed. IPv4 and IPv6 only on Mxp.

RFC 5883, Bidirectional Forwarding Detection (BFD) for Multihop Paths is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

IPv4 only on all platforms listed. IPv4 and IPv6 only on Mxp.

RFC 6528, Defending against Sequence Number Attacks is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 7130, Bidirectional Forwarding Detection (BFD) on Link Aggregation Group (LAG) Interfaces is supported on T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

## 9.7 IP — Multicast

RFC 1112, Host Extensions for IP Multicasting is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

IGMP v1, v2, v3 is supported.

RFC 2236, Internet Group Management Protocol, Version 2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3306, Unicast-Prefix-based IPv6 Multicast Addresses is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3376, Internet Group Management Protocol, Version 3 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3446, Anycast Rendezvous Point (RP) mechanism using Protocol Independent Multicast (PIM) and Multicast Source Discovery Protocol (MSDP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

MSDP supported only on Sx/S-1/10GE standalone.

RFC 3618, Multicast Source Discovery Protocol (MSDP) is supported on Sx/S-1/10GE



**Note:**

Only in standalone mode.

RFC 4601, Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4604, Using Internet Group Management Protocol Version 3 (IGMPv3) and Multicast Listener Discovery Protocol Version 2 (MLDv2) for Source-Specific Multicast is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

MLD is not supported.

RFC 4607, Source-Specific Multicast for IP is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4608, Source-Specific Protocol Independent Multicast in 232/8 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4610, Anycast-RP Using Protocol Independent Multicast (PIM) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5059, Bootstrap Router (BSR) Mechanism for Protocol Independent Multicast (PIM) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5384, The Protocol Independent Multicast (PIM) Join Attribute Format is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6513, Multicast in MPLS/BGP IP VPNs is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 6514, BGP Encodings and Procedures for Multicast in MPLS/IP VPNs is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 6515, IPv4 and IPv6 Infrastructure Addresses in BGP Updates for Multicast VPNs is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 6625, Wildcards in Multicast VPN Auto-Discover Routes is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 6826, Multipoint LDP In-Band Signaling for Point-to-Multipoint and Multipoint-to-Multipoint Label Switched Path is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 7246, Multipoint Label Distribution Protocol In-Band Signaling in a Virtual Routing and Forwarding (VRF) Table Context is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

RFC 7385, IANA Registry for P-Multicast Service Interface (PMSI) Tunnel Type Code Points is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
Only IPv4.

## 9.8 IP — Version 4

RFC 791, Internet Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 792, Internet Control Message Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 826, An Ethernet Address Resolution Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1519, Classless Inter-Domain Routing (CIDR): an Address Assignment and Aggregation Strategy is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1812, Requirements for IPv4 Routers is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1981, Path MTU Discovery for IP version 6 is supported on K12, K30, T(N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2401, Security Architecture for Internet Protocol is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Supported only for OSPFv3 authentication. Not supported for services.

RFC 2460, Internet Protocol, Version 6 (IPv6) Specification is supported on D, Dxp, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, and T(A) for Management only.

## 9.9 IP — Version 6

RFC 2464, Transmission of IPv6 Packets over Ethernet Networks is supported on D, Dxp, K5 K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 3021, Using 31-Bit Prefixes on IPv4 Point-to-Point Links is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3122, Extensions to IPv6 Neighbor Discovery for Inverse Discovery Specification is supported on K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3587, IPv6 Global Unicast Address Format is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4007, IPv6 Scoped Address Architecture is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4193, Unique Local IPv6 Unicast Addresses is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4291, Internet Protocol Version 6 (IPv6) Addressing Architecture is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4443, Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4861, Neighbor Discovery for IP version 6 (IPv6) is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 4862, IPv6 Stateless Address Autoconfiguration (Router Only) is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 5095, Deprecation of Type 0 Routing Headers in IPv6 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5952, A Recommendation for IPv6 Address Text Representation is supported on D, Dxp, K5, K12, K30, T(A, N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

D, Dxp, K5, and T(A) for Management only.

RFC 6106, IPv6 Router Advertisement Options for DNS Configuration is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6164, Using 127-Bit IPv6 Prefixes on Inter-Router Links is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.10 IPsec

RFC 2401, Security Architecture for the Internet Protocol is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only for use with OSPFv3 authentication. Not supported for services.

RFC 2406, IP Encapsulating Security Payload (ESP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

Only for use with OSPFv3 authentication. Not supported for services.

## 9.11 IS-IS

draft-ietf-isis-mi-02, IS-IS Multi-Instance is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-isis-segment-routing-extensions-04, IS-IS Extensions for Segment Routing is supported on K12, K30, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

draft-kaplan-isis-ext-eth-02, Extended Ethernet Frame Size Support is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

ISO/IEC 10589:2002, Second Edition, Nov. 2002, Intermediate system to Intermediate system intra-domain routing information exchange protocol for use in conjunction with the protocol for providing the connectionless-mode Network Service (ISO 8473) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1195, Use of OSI IS-IS for Routing in TCP/IP and Dual Environments is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3359, Reserved Type, Length and Value (TLV) Codepoints in Intermediate System to Intermediate System is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3719, Recommendations for Interoperable Networks using Intermediate System to Intermediate System (IS-IS) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3787, Recommendations for Interoperable IP Networks using Intermediate System to Intermediate System (IS-IS) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4971, Intermediate System to Intermediate System (IS-IS) Extensions for Advertising Router Information is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5120, M-ISIS: Multi Topology (MT) Routing in IS-IS is supported on K12, T(N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 5130, A Policy Control Mechanism in IS-IS Using Administrative Tags is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5301, Dynamic Hostname Exchange Mechanism for IS-IS is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5302, Domain-wide Prefix Distribution with Two-Level IS-IS is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5303, Three-Way Handshake for IS-IS Point-to-Point Adjacencies is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5304, IS-IS Cryptographic Authentication is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5305, IS-IS Extensions for Traffic Engineering TE is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5306, Restart Signaling for IS-IS (Helper Mode) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5308, Routing IPv6 with IS-IS is supported on K12, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



RFC 5309, Point-to-Point Operation over LAN in Link State Routing Protocols is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5310, IS-IS Generic Cryptographic Authentication is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6232, Purge Originator Identification TLV for IS-IS is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6233, IS-IS Registry Extension for Purges is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-isis-mi-02, IS-IS Multi-Instance is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

K12, K30 support only a single instance and can operate in multi-instance deployment as it supports the processing of TLVs for multi-instance support.

draft-ietf-isis-segment-routing-extensions-04, IS-IS Extensions for Segment Routing is supported on K12, K30, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

## 9.12 Management

draft-ietf-snmpv3-update-mib-05, Management Information Base (MIB) for the Simple Network Management Protocol (SNMP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-idr-bgp4-mib-05, Definitions of Managed Objects for the Fourth Version of Border Gateway Protocol (BGP-4) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-isis-wg-mib-06, Management Information Base for Intermediate System to Intermediate System (IS-IS) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-mboned-msdp-mib-01, Multicast Source Discovery protocol MIB is supported on Sx/S-1/10GE



**Note:**

Only in standalone mode.

draft-ietf-mpls-ldp-mib-07, Definitions of Managed Objects for the Multiprotocol Label Switching, Label Distribution Protocol (LDP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-mpls-lsr-mib-06, Multiprotocol Label Switching (MPLS) Label Switching Router (LSR) Management Information Base Using SMIv2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-mpls-te-mib-04, Multiprotocol Label Switching (MPLS) Traffic Engineering Management Information Base is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-ospf-mib-update-08, OSPF Version 2 Management Information Base is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

ianaaddressfamilynumbers-mib, IANA-ADDRESS-FAMILY-NUMBERS-MIB is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



ianaiftype-mib, IANAifType-MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

ianaiprouteprotocol-mib, IANA-RTPROTO-MIB is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE8021-CFM-MIB, IEEE P802.1ag(TM) CFM MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE8021-PAE-MIB, IEEE 802.1X MIB is supported on D, Dxp, K5, K12, K30, T(A,N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

IEEE8023-LAG-MIB, IEEE 802.3ad MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

LLDP-MIB, IEEE P802.1AB(TM) LLDP MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1157, A Simple Network Management Protocol (SNMP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1215, A Convention for Defining Traps for use with the SNMP is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 1724, RIP Version 2 MIB Extension is supported on Mxp and Sx/S-1/10GE



**Note:**

Only in standalone mode.

RFC 2021, Remote Network Monitoring Management Information Base Version 2 using SMIv2 is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2138, Remote Authentication Dial In User Service (RADIUS) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2206, RSVP Management Information Base using SMIv2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2213, Integrated Services Management Information Base using SMIv2 is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2571, An Architecture for Describing SNMP Management Frameworks is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2572, Message Processing and Dispatching for the Simple Network Management Protocol (SNMP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2573, SNMP Applications is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2575, View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP) is supported on D, E, Dxp, K5, K12, K30, T(A,N), X, Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2578, Structure of Management Information Version 2 (SMIv2) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2579, Textual Conventions for SMIv2 is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2787, Definitions of Managed Objects for the Virtual Router Redundancy Protocol is supported on K12, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2819, Remote Network Monitoring Management Information Base is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2856, Textual Conventions for Additional High Capacity Data Types is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2863, The Interfaces Group MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2864, The Inverted Stack Table Extension to the Interfaces Group MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2933, Internet Group Management Protocol MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3014, Notification Log MIB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3164, The BSD syslog Protocol is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3165, Definitions of Managed Objects for the Delegation of Management Scripts is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3231, Definitions of Managed Objects for Scheduling Management Operations is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3273, Remote Network Monitoring Management Information Base for High Capacity Networks is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3414, User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3416, Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3417, Transport Mappings for the Simple Network Management Protocol (SNMP) (SNMP over UDP over IPv4) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3419, Textual Conventions for Transport Addresses is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3584, Coexistence between Version 1, Version 2, and Version 3 of the Internet-standard Network Management Framework is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3593, Textual Conventions for MIB Modules Using Performance History Based on 15 Minute Intervals is supported on Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3635, Definitions of Managed Objects for the Ethernet-like Interface Types is supported on D, E, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3826, The Advanced Encryption Standard (AES) Cipher Algorithm in the SNMP User-based Security Model is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3877, Alarm Management Information Base (MIB) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4001, Textual Conventions for Internet Network Addresses is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4022, Management Information Base for the Transmission Control Protocol (TCP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4113, Management Information Base for the User Datagram Protocol (UDP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4220, Traffic Engineering Link Management Information Base is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4292, IP Forwarding Table MIB is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4293, Management Information Base for the Internet Protocol (IP) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5101, Specification of the IP Flow Information Export (IPFIX) Protocol for the Exchange of IP Traffic Flow Information is supported on Mxp, Sx/S-1/10GE, and R6

RFC 6241, Network Configuration Protocol (NETCONF) is supported on K5, K12, T(N), Mxp, Sx/S-1/10GE, R6, and R12

RFC 6242, Using the NETCONF Protocol over Secure Shell (SSH) is supported on K5, K12, T(N), Mxp, Sx/S-1/10GE, R6, and R12

## 9.13 MPLS — General

RFC 3031, Multiprotocol Label Switching Architecture is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3032, MPLS Label Stack Encoding is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3443, Time To Live (TTL) Processing in Multi-Protocol Label Switching (MPLS) Networks is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4182, Removing a Restriction on the use of MPLS Explicit NULL is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5332, MPLS Multicast Encapsulations is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12

## 9.14 MPLS — GMPLS

draft-ietf-ccamp-rsvp-te-srlg-collect-04, RSVP-TE Extensions for Collecting SRLG Information is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.15 MPLS — LDP

draft-ietf-mpls-ldp-ipv6-15, Updates to LDP for IPv6 is supported on Mxp

draft-pdutta-mpls-ldp-adj-capability-00, LDP Adjacency Capabilities is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-pdutta-mpls-ldp-v2-00, LDP Version 2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-pdutta-mpls-ldp-hello-reduce-04, Targeted LDP Hello Reduction is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3037, LDP Applicability is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3478, Graceful Restart Mechanism for Label Distribution Protocol (Helper Mode) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5036, LDP Specification is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5283, LDP Extension for Inter-Area Label Switched Paths (LSPs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5443, LDP IGP Synchronization is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5561, LDP Capabilities is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6388, Label Distribution Protocol Extensions for Point-to-Multipoint and Multipoint-to-Multipoint Label Switched Paths is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**  
P2MP LSPs only.

## 9.16 MPLS — MPLS-TP

RFC 5586, MPLS Generic Associated Channel is supported on T(N), R6, and R12

RFC 5921, A Framework for MPLS in Transport Networks is supported on T(N), R6, and R12

RFC 5960, MPLS Transport Profile Data Plane Architecture is supported on T(N), R6, and R12

RFC 6370, MPLS Transport Profile (MPLS-TP) Identifiers is supported on T(N), R6, and R12

RFC 6378, MPLS Transport Profile (MPLS-TP) Linear Protection is supported on T(N), R6, and R12

RFC 6426, MPLS On-Demand Connectivity and Route Tracing is supported on T(N), R6, and R12

RFC 6428, Proactive Connectivity Verification, Continuity Check and Remote Defect indication for MPLS Transport Profile is supported on T(N), R6, and R12

RFC 6478, Pseudowire Status for Static Pseudowires is supported on T(N), R6, and R12

RFC 7213, MPLS Transport Profile (MPLS-TP) Next-Hop Ethernet Addressing is supported on T(N), R6, and R12

## 9.17 MPLS — OAM

RFC 6424, Mechanism for Performing Label Switched Path Ping (LSP Ping) over MPLS Tunnels is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6425, Detecting Data Plane Failures in Point-to-Multipoint Multiprotocol Label Switching (MPLS) - Extensions to LSP Ping is supported on T(N), Mxp, R6, and R12

## 9.18 MPLS — RSVP-TE

RFC 2702, Requirements for Traffic Engineering over MPLS is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2747, RSVP Cryptographic Authentication is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2961, RSVP Refresh Overhead Reduction Extensions is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3097, RSVP Cryptographic Authentication -- Updated Message Type Value is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3209, RSVP-TE: Extensions to RSVP for LSP Tunnels is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3477, Signalling Unnumbered Links in Resource ReSerVation Protocol - Traffic Engineering (RSVP-TE) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4090, Fast Reroute Extensions to RSVP-TE for LSP Tunnels is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4561, Definition of a Record Route Object (RRO) Node-Id Sub-Object is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4875, Extensions to Resource Reservation Protocol - Traffic Engineering (RSVP-TE) for Point-to-Multipoint TE Label Switched Paths (LSPs) is supported on T(N), Mxp, Sx/S-1/10GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4950, ICMP Extensions for Multiprotocol Label Switching is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5817, Graceful Shutdown in MPLS and Generalized MPLS Traffic Engineering Networks is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.19 OSPF

draft-ietf-ospf-prefix-link-attr-06, OSPFv2 Prefix/Link Attribute Advertisement is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-ospf-segment-routing-extensions-04, OSPF Extensions for Segment Routing is supported on K12, K30, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 1765, OSPF Database Overflow is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2328, OSPF Version 2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3101, The OSPF Not-So-Stubby Area (NSSA) Option is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3509, Alternative Implementations of OSPF Area Border Routers is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3623, Graceful OSPF Restart Graceful OSPF Restart (Helper Mode) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3630, Traffic Engineering (TE) Extensions to OSPF Version 2 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4222, Prioritized Treatment of Specific OSPF Version 2 Packets and Congestion Avoidance is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4552, Authentication/Confidentiality for OSPFv3 is supported on K12, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4576, Using a Link State Advertisement (LSA) Options Bit to Prevent Looping in BGP/MPLS IP Virtual Private Networks (VPNs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4577, OSPF as the Provider/Customer Edge Protocol for BGP/MPLS IP Virtual Private Networks (VPNs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 4970, Extensions to OSPF for Advertising Optional Router Capabilities is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5185, OSPF Multi-Area Adjacency is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5187, OSPFv3 Graceful Restart (Helper Mode) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12

RFC 5243, OSPF Database Exchange Summary List Optimization is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5250, The OSPF Opaque LSA Option is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5309, Point-to-Point Operation over LAN in Link State Routing Protocols is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5340, OSPF for IPv6 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5838, Support of Address Families in OSPFv3 is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6987, OSPF Stub Router Advertisement is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

draft-ietf-ospf-prefix-link-attr-06, OSPFv2 Prefix/Link Attribute Advertisement is supported on K12, K30, Mxp, Sx/S-1/10GE, R6, and R12

draft-ietf-ospf-segment-routing-extensions-04, OSPF Extensions for Segment Routing is supported on K12, K30, Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



## 9.20 Pseudowire

draft-ietf-l2vpn-vpws-iw-oam-04, OAM Procedures for VPWS Interworking is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3916, Requirements for Pseudo- Wire Emulation Edge-to-Edge (PWE3) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3985, Pseudo Wire Emulation Edge-to-Edge (PWE3) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4385, Pseudo Wire Emulation Edge-to-Edge (PWE3) Control Word for Use over an MPLS PSN is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4446, IANA Allocations for Pseudowire Edge to Edge Emulation (PWE3) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4447, Pseudowire Setup and Maintenance Using the Label Distribution Protocol (LDP) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 4448, Encapsulation Methods for Transport of Ethernet over MPLS Networks is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5659, An Architecture for Multi-Segment Pseudowire Emulation Edge-to-Edge is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6073, Segmented Pseudowire is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6310, Pseudowire (PW) Operations, Administration, and Maintenance (OAM) Message Mapping is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6391, Flow-Aware Transport of Pseudowires over an MPLS Packet Switched Network is supported on K12, K30, Mxp, R6, and R12

RFC 6718, Pseudowire Redundancy is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6870, Pseudowire Preferential Forwarding Status bit is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 7023, MPLS and Ethernet Operations, Administration, and Maintenance (OAM) Interworking is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 7267, Dynamic Placement of Multi-Segment Pseudowires is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.21 Quality of Service

RFC 2430, A Provider Architecture for Differentiated Services and Traffic Engineering (PASTE) is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2474, Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 2598, An Expedited Forwarding PHB is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3140, Per Hop Behavior Identification Codes is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 3260, New Terminology and Clarifications for Diffserv is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.22 RIP

RFC 1058, Routing Information Protocol is supported on Mxp and Sx/S-1/10GE



**Note:**

Only in standalone mode.

RFC 2082, RIP-2 MD5 Authentication is supported on Mxp and Sx/S-1/10GE



**Note:**

Only in standalone mode.

RFC 2453, RIP Version 2 is supported on Mxp and Sx/S-1/10GE



**Note:**

Only in standalone mode.

## 9.23 Timing

GR-1244-CORE, Clocks for the Synchronized Network: Common Generic Criteria, Issue 3, May 2005 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

GR-253-CORE, SONET Transport Systems: Common Generic Criteria. Issue 3, September 2000 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

IEEE 1588-2008, IEEE Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, IEEE default profile is supported only includes the Dxp-12p ETR, Dxp-16p, Dxp-24p. Sx-10/100GE does not support IEEE default profile.

ITU-T G.781, Synchronization layer functions, issued 09/2008 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12





**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

ITU-T G.813, Timing characteristics of SDH equipment slave clocks (SEC), issued 03/2003 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

ITU-T G.8261, Timing and synchronization aspects in packet networks, issued 04/2008 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

ITU-T G.8262, Timing characteristics of synchronous Ethernet equipment slave clock (EEC), issued 08/2007 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

ITU-T G.8264, Distribution of timing information through packet networks, issued 10/2008 is supported on D-ETR, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, and Dxp-24p.

ITU-T G.8265.1, Precision time protocol telecom profile for frequency synchronization, issued 10/2010 is supported on D-ETR, K5, K12, K30, T(A,N), Mxp, Sx-1/10GE, R6, and R12

ITU-T G.8275.1, Precision time protocol telecom profile for phase/time synchronization with full timing support from the network, issued 07/2014 is supported on Dxp, K12, K30, T(A,N), Mxp, Sx-1/10GE, Sx-10/100GE, R6, and R12



**Note:**

For 7210 SAS-Sx 10/100GE, the support only includes the Sx 10/100GE QSFP28 variant. For Dxp, the support only includes the Dxp-12p ETR, Dxp-16p, Dxp-24p.

IEC/IEEE 61850-9-3-2016, Communication networks and systems for power utility automation - Part 9-3: Precision time protocol profile for power utility automation is supported on Dxp-16p and Dxp-24p

IEEE C37.238-2017 - IEEE Standard Profile for Use of IEEE 1588 Precision Time Protocol in Power System Applications is supported on Dxp-16p and Dxp-24p

RFC 5905, Network Time Protocol Version 4: Protocol and Algorithms Specification is supported on D, Dxp, K5, K12, K30, T(A,N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

## 9.24 VPLS

RFC 4761, Virtual Private LAN Service (VPLS) Using BGP for Auto-Discovery and Signaling is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



**Note:**

On 7210 platforms, only BGP-AD is supported with TLDP signalling for PW. No BGP signalling is supported for PW establishment.


RFC 4762, Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 5501, Requirements for Multicast Support in Virtual Private LAN Services is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12

RFC 6074, Provisioning, Auto-Discovery, and Signaling in Layer 2 Virtual Private Networks (L2VPNs) is supported on K12, K30, T(N), Mxp, Sx/S-1/10GE, Sx-10/100GE, Sx/S-1/10GE-VC, R6, and R12



# Customer document and product support



## Customer documentation

[Customer documentation welcome page](#)



## Technical support

[Product support portal](#)



## Documentation feedback

[Customer documentation feedback](#)